
Manual # 99905930

22/153DL, 24/169DL, 26/180DL Technical Specifications

Revision Date: 03032015



IOWA MOLD TOOLING CO., INC.

PO Box 189

Garner, IA 50438

Tel: 641-923-3711 FAX: 641-923-2424

Website: <http://www.imt.com>

Copyright © 2009 Iowa Mold Tooling Co., Inc.
All rights reserved

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise without the prior written permission of Iowa Mold Tooling Co., Inc.

Iowa Mold Tooling Co., Inc. is an Oshkosh Corporation company.

Published on 03 March, 2015

Revisions III

Table of Contents

Chapter 1: Technical Data for 22/153DL 1

Chapter 2: Capacity Charts for 22/153DL 7

Chapter 3: Technical Data for 24/169DL 17

Chapter 4: Capacity Charts for 24/169DL 23

Chapter 5: Technical Data for 26/180DL 33

Chapter 6: Capacity Charts for 26/180DL 39

Chapter 7: Dimensional Drawings for 22/153DL, 24/169DL, 26/180DL 72

Revisions

[illegible]

This Page Left Blank Intentionally

CHAPTER 1

22/153DL Technical Specifications

In this Chapter

22/153DL Performance2

22/153DL Dimensions3

22/153DL Weights, Basic Loader3

22/153DL Weights, Equipment4

22/153DL Max. Load on Stabilizers (Per Stabilizer Cylinders)4

22/153DL Power Consumption / Oil Capacity5

22/153DL Dimensions

	22/153DL K2	22/153DL K3	22/153DL K4	22/153DL K5	22/153DL K6	22/153DL K7	22/153DL K8
Height above chassis	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	91.93" (2335 mm)
Width	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)
Length, no extra valves	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	39.17" (995 mm)	39.17" (995 mm)
Length, with extra valves (hose guides)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)		
Length, with 1 extra valve (hose reels)						39.17" (995 mm)	39.17" (995 mm)
Length, with 2 extra valves (hose reels)						40.55" (1030 mm)	40.55" (1030 mm)
Length, with extra valves (int. hose routing)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)		
Stabilizer spread, S1 (standard)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)
Stabilizer spread, D	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)

22/153DL Weights, Basic Loader

	22/153DL K2	22/153DL K3	22/153DL K4	22/153DL K5	22/153DL K6	22/153DL K7	22/153DL K8
Standard loader 1), excl. Stabilizers	4365 lb (1980 kg)	4740 lb (2150 kg)	5181 lb (2350 kg)	5512 lb (2500 kg)	5820 lb (2640 kg)	6052 lb (2745 kg)	6239 lb (2830 kg)
Stabilizers, S1 fixed	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)
Stabilizers, S1 swing-up	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)
Stabilizers, S1 hydr. swing-up	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)
Stabilizers, D fixed	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)
Stabilizers, D swing-up	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)
Stabilizers, D hydr. swing-up	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)
Mounting kit, 4 bolts	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)
Mounting kit, 8 bolts	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)
Tank, excl. oil (fitted on loader)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)z
Manual extensions			176 lb (80 kg)	154 lb (70 kg)	132 lb (60 kg)	88 lb (45 kg)	77 lb (35 kg)
			154 lb (70 kg)	132 lb (60 kg)	88 lb (45 kg)	77 lb (35 kg)	
			132 lb (60 kg)	88 lb (45 kg)	77 lb (35 kg)		
Oil in loader (stowing position)	88 lb (45 kg)	110 lb (50 kg)	121 lb (55 kg)	132 lb (60 kg)	143 lb (65 kg)	154 lb (70 kg)	154 lb (70 kg)

1) Weights $\pm$ 5% because of tolerances for plate thickness

22/153DL Weights, Equipment

[illegible]

22/153DL Max. Load on Stabilizers (Per Stabilizer Cylinder)

[illegible]

22/153DL Power Consumption / Oil Capacity

	22/153DL K2	22/153DL K3	22/153DL K4	22/153DL K5	22/153DL K6	22/153DL K7	22/153DL K8
Working pressure	4351 PSI (300 Bar)	4351 PSI (300 Bar)	4351 PSI (300 Bar)	4351 PSI (300 Bar)	4351 PSI (300 Bar)	4351 PSI (300 Bar)	4351 PSI (300 Bar)
Tank capacity (fitted on loader)	23.78 Gallons (90 L)	23.78 Gallons (90 L)	23.78 Gallons (90 L)	23.78 Gallons (90 L)	23.78 Gallons (90 L)	23.78 Gallons (90 L)	23.78 Gallons (90 L)
Max. pump performance, Hydrocontrol, 1-circuit	15.85 Gallon/min (60 L/min)	15.85 Gallon/min (60 L/min)	15.85 Gallon/min (60 L/min)	15.85 Gallon/min (60 L/min)	15.85 Gallon/min (60 L/min)	15.85 Gallon/min (60 L/min)	15.85 Gallon/min (60 L/min)
Max. pump performance, Hydrocontrol, 2-circuit	2x13.2 Gallons/ min (2x50 L/min)	2x13.2 Gallons/ min (2x50 L/min)	2x13.2 Gallons/ min (2x50 L/min)	2x13.2 Gallons/ min (2x50 L/min)	2x13.2 Gallons/ min (2x50 L/min)	2x13.2 Gallons/ min (2x50 L/min)	2x13.2 Gallons/ min (2x50 L/min)
Max. pump performance, Danfoss fixed flow	-	-	-	-	-	-	-
Max. pump performance, Danfoss variable	-	-	-	-	-	-	-

This Page Left Blank Intentionally


CHAPTER 2

22/153DL Capacity Charts


In this Chapter

22/153DL Capacity Chart K2	8
22/153DL Capacity Chart K3	9
22/153DL Capacity Chart K4	10
22/153DL Capacity Chart K5	11
22/153DL Capacity Chart K6	12
22/153DL Capacity Chart K7	13
22/153DL Capacity Chart K8	14
22/153DL Capacity Chart K2-K8	15


22/153DL K2 Capacity Chart

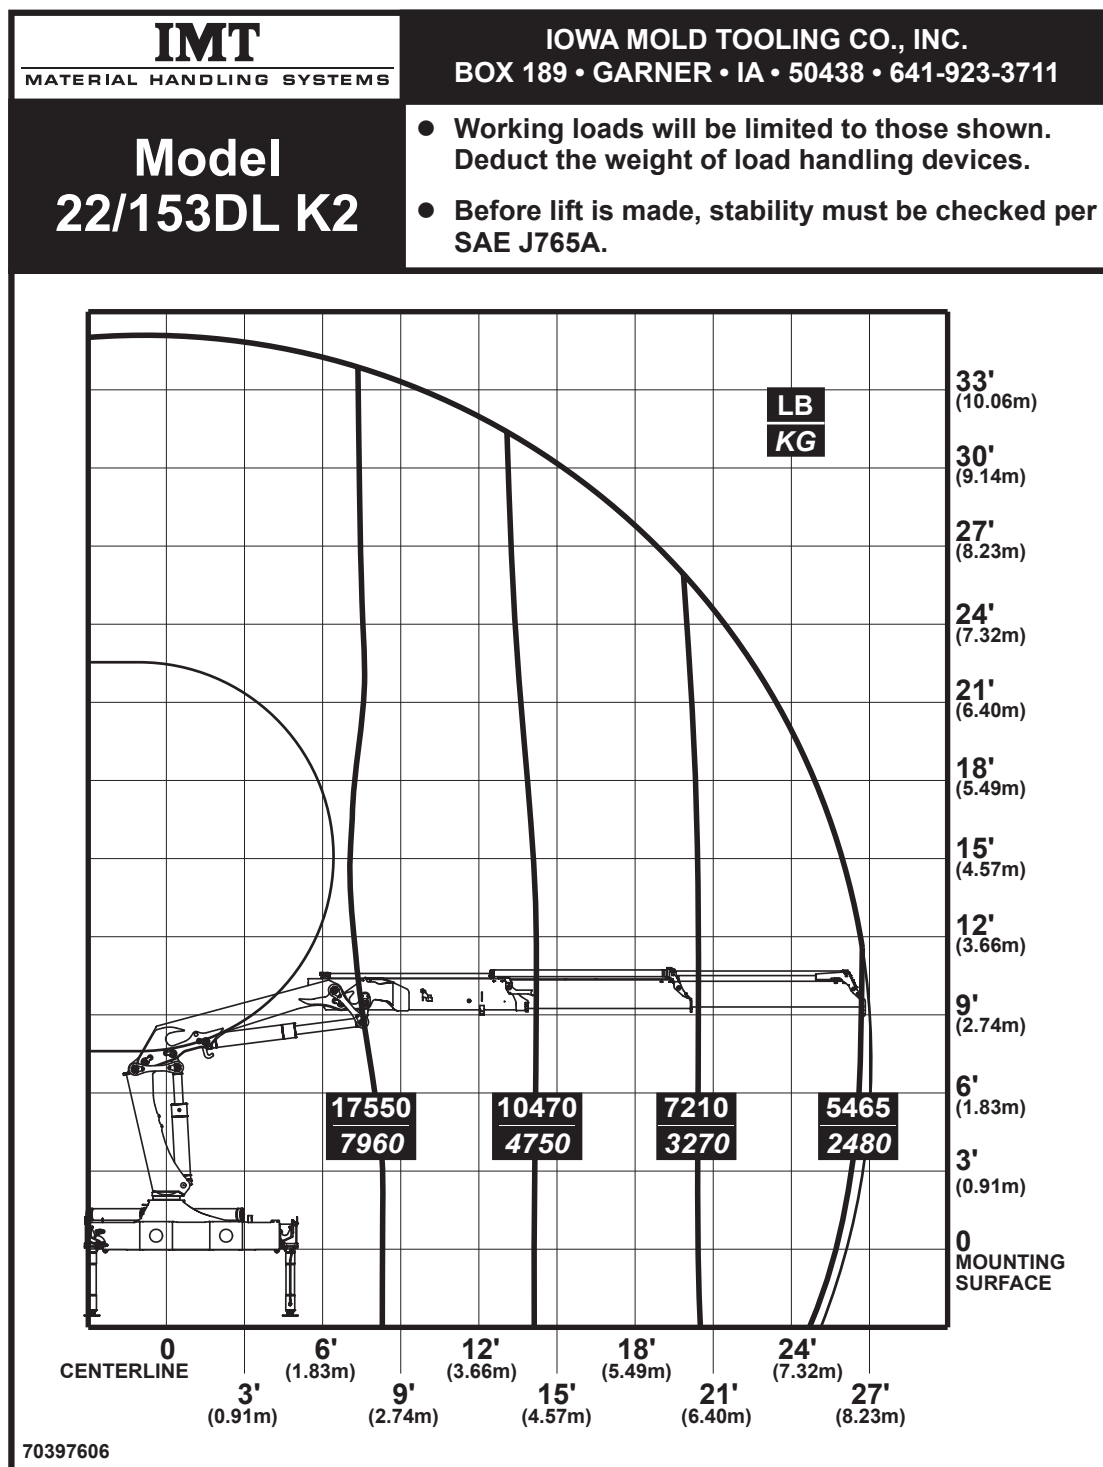


22/153DL K3 Capacity Chart

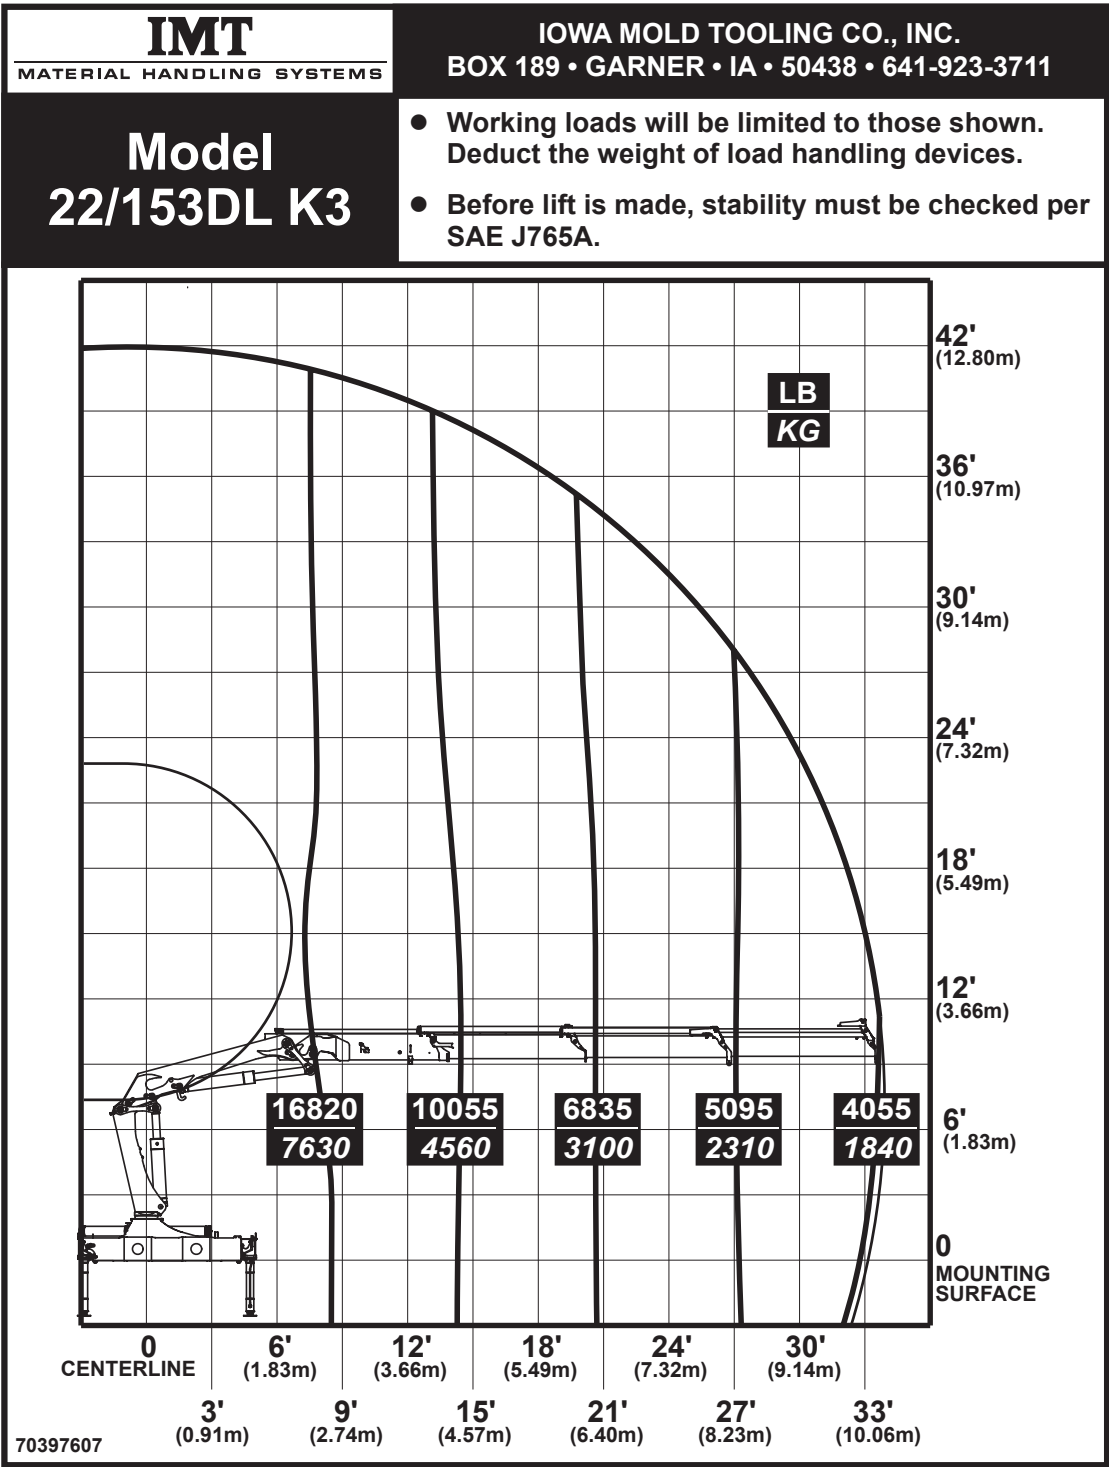


22/153DL K4 Capacity Chart

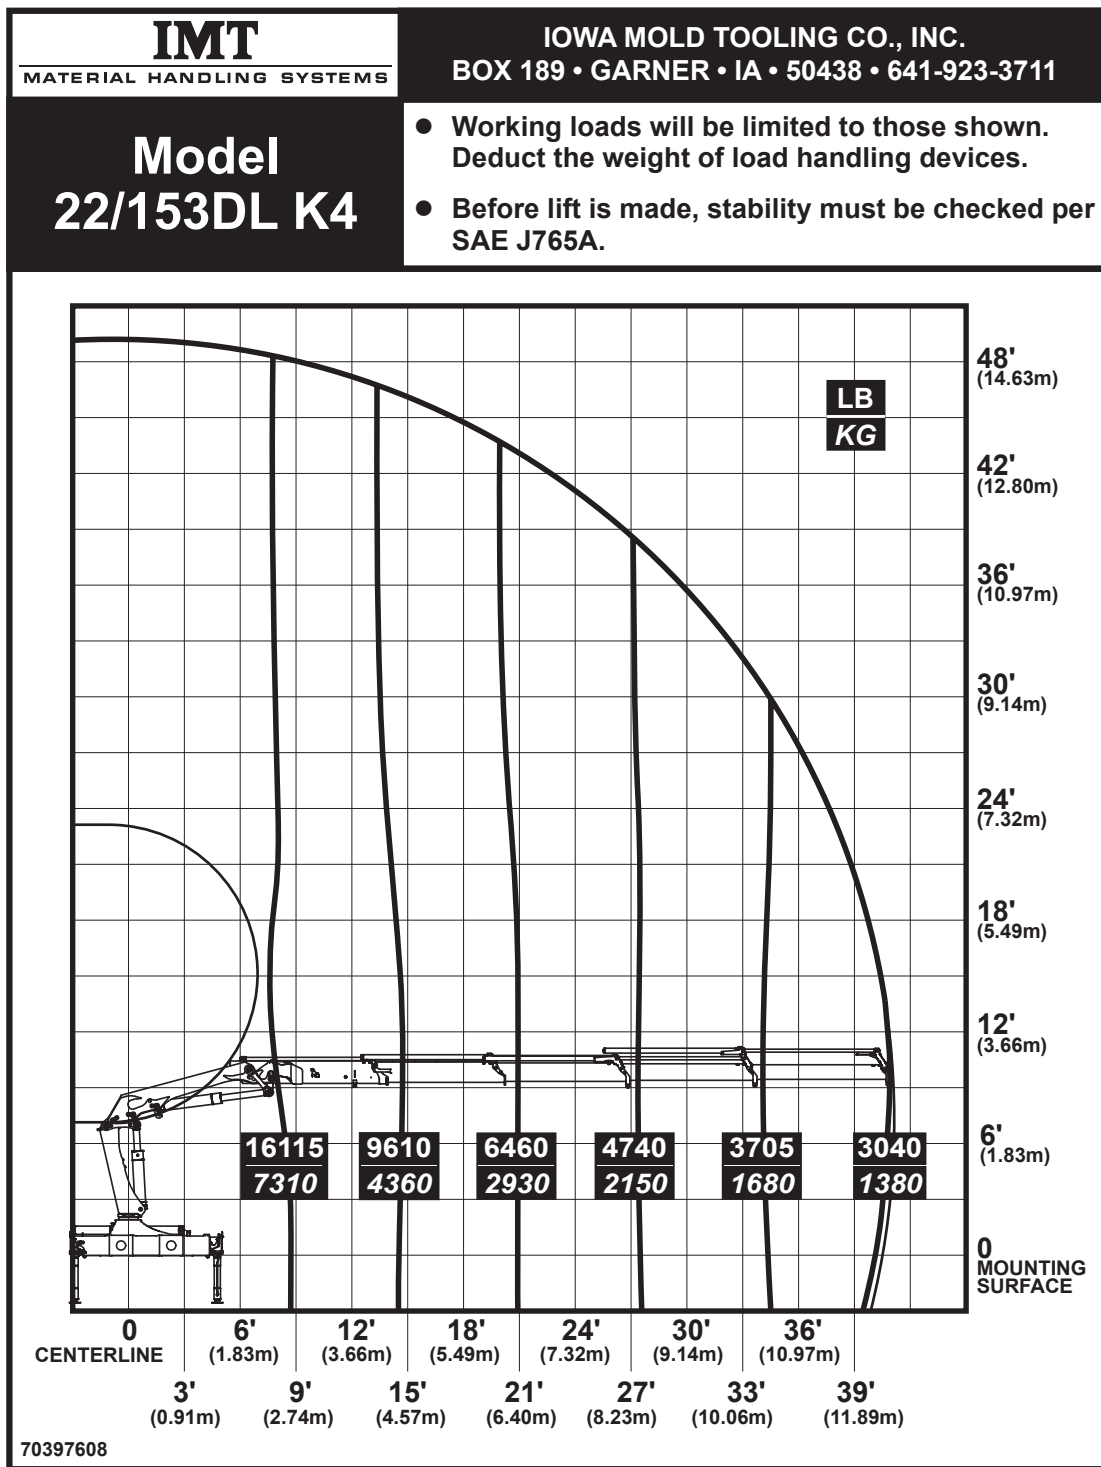


22/153DL K5 Capacity Chart

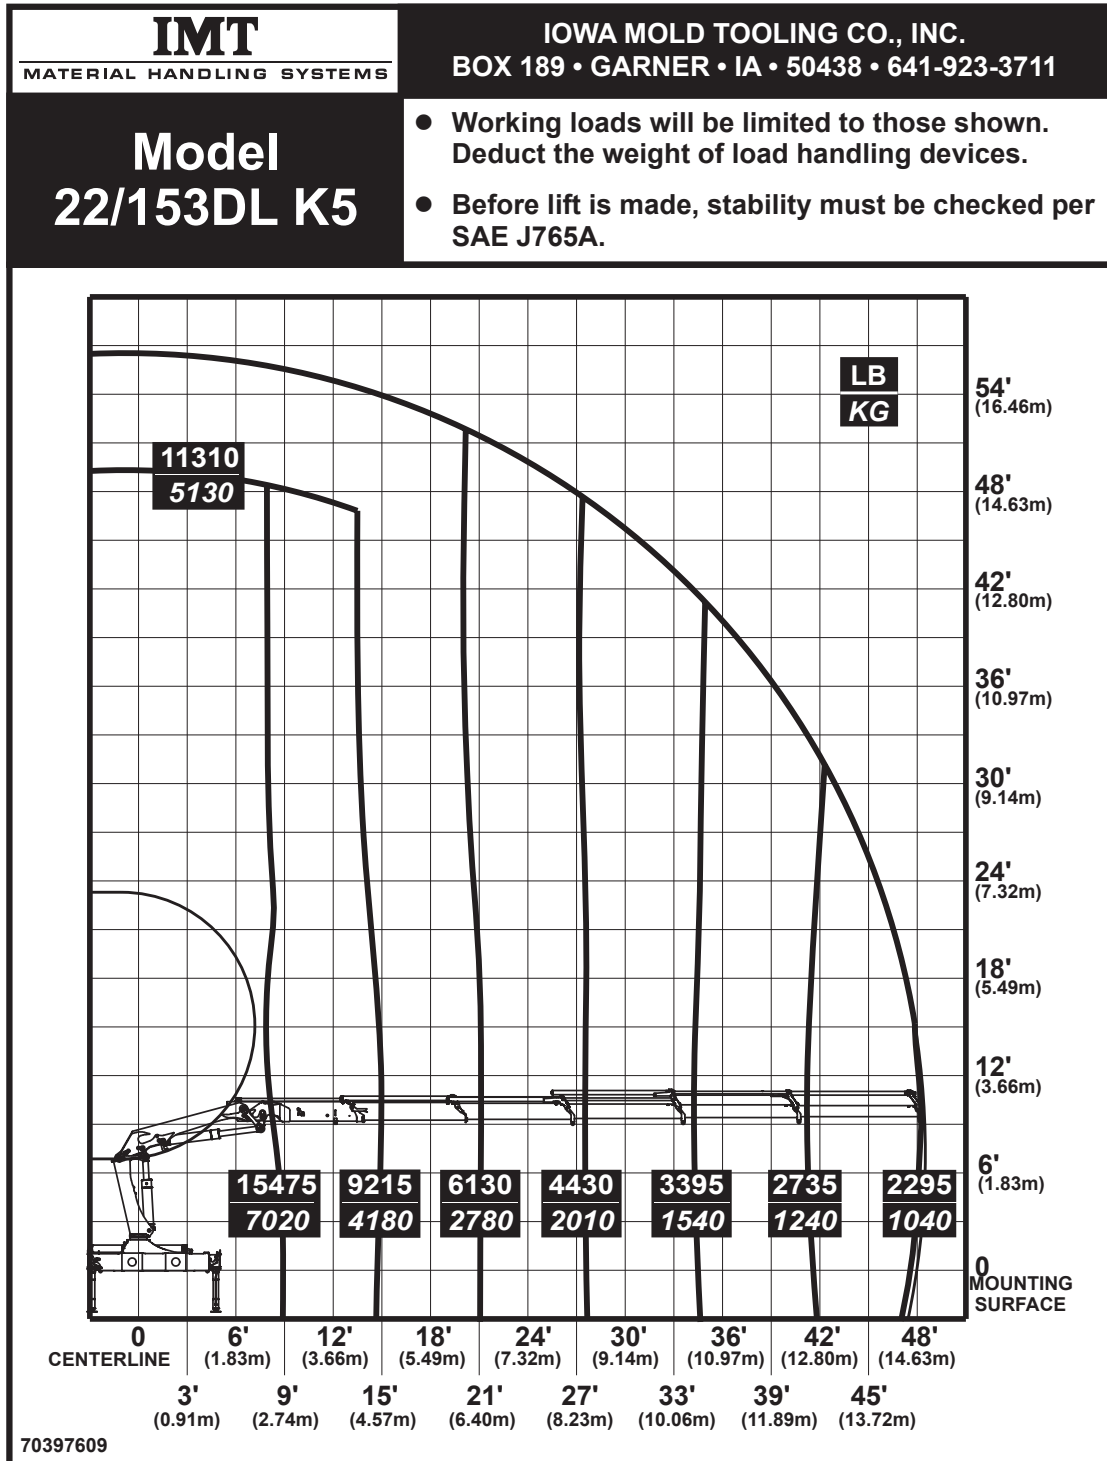


22/153DL K6 Capacity Chart

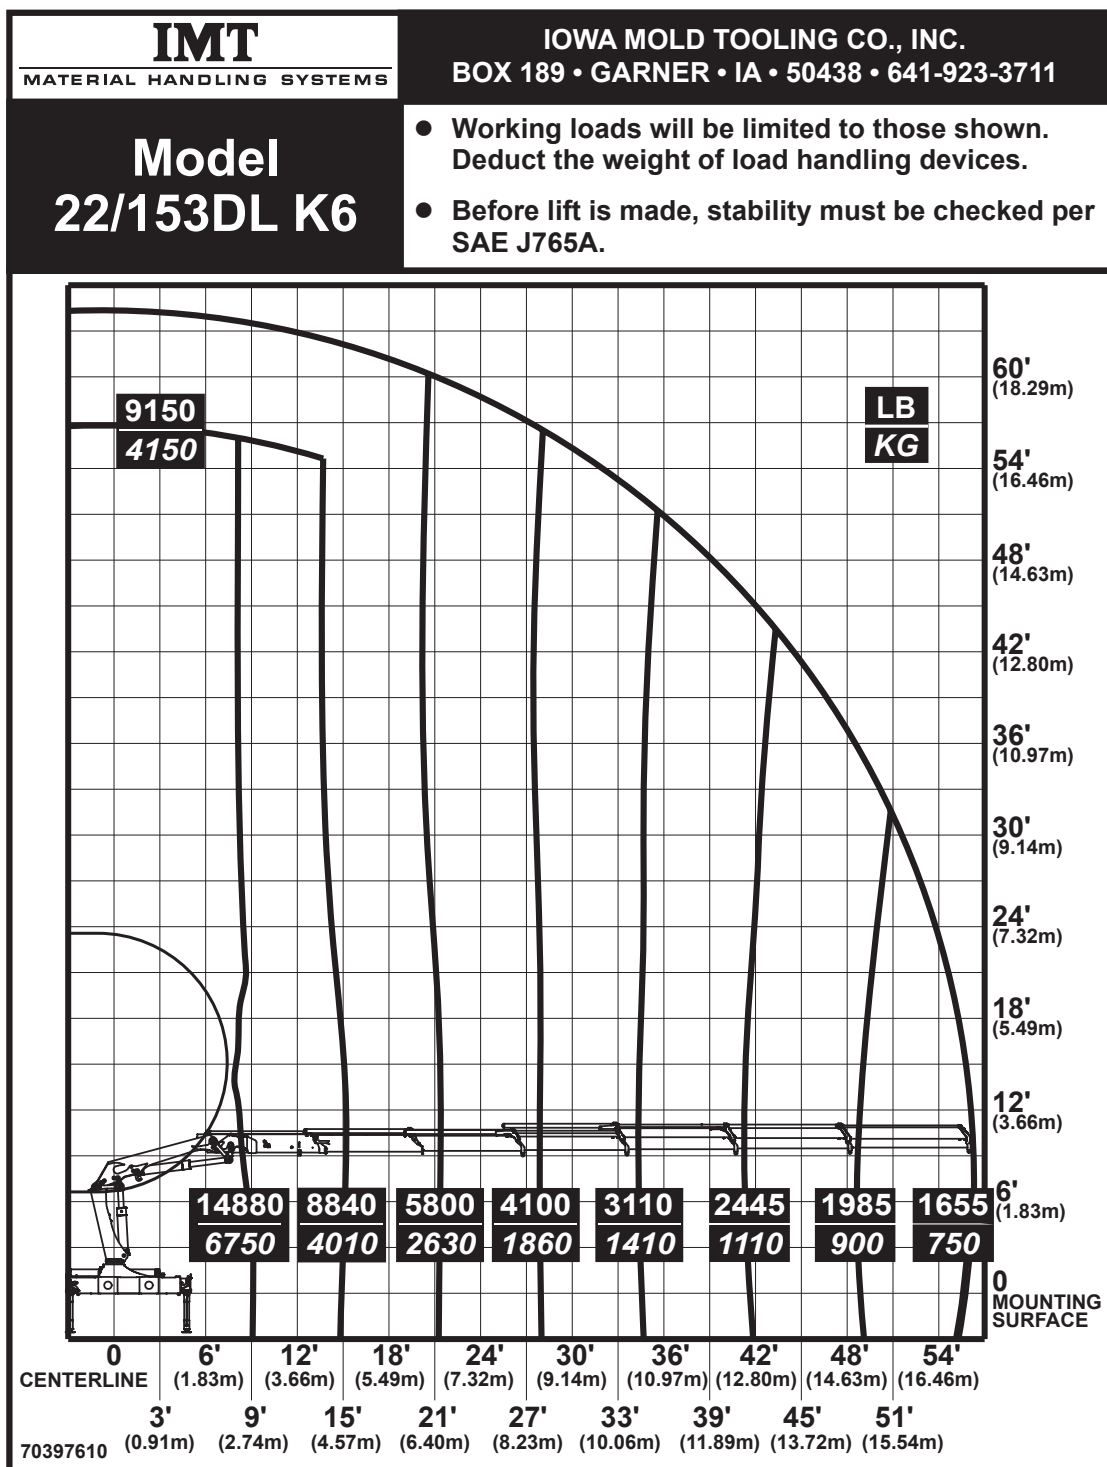


22/153DL K7 Capacity Chart

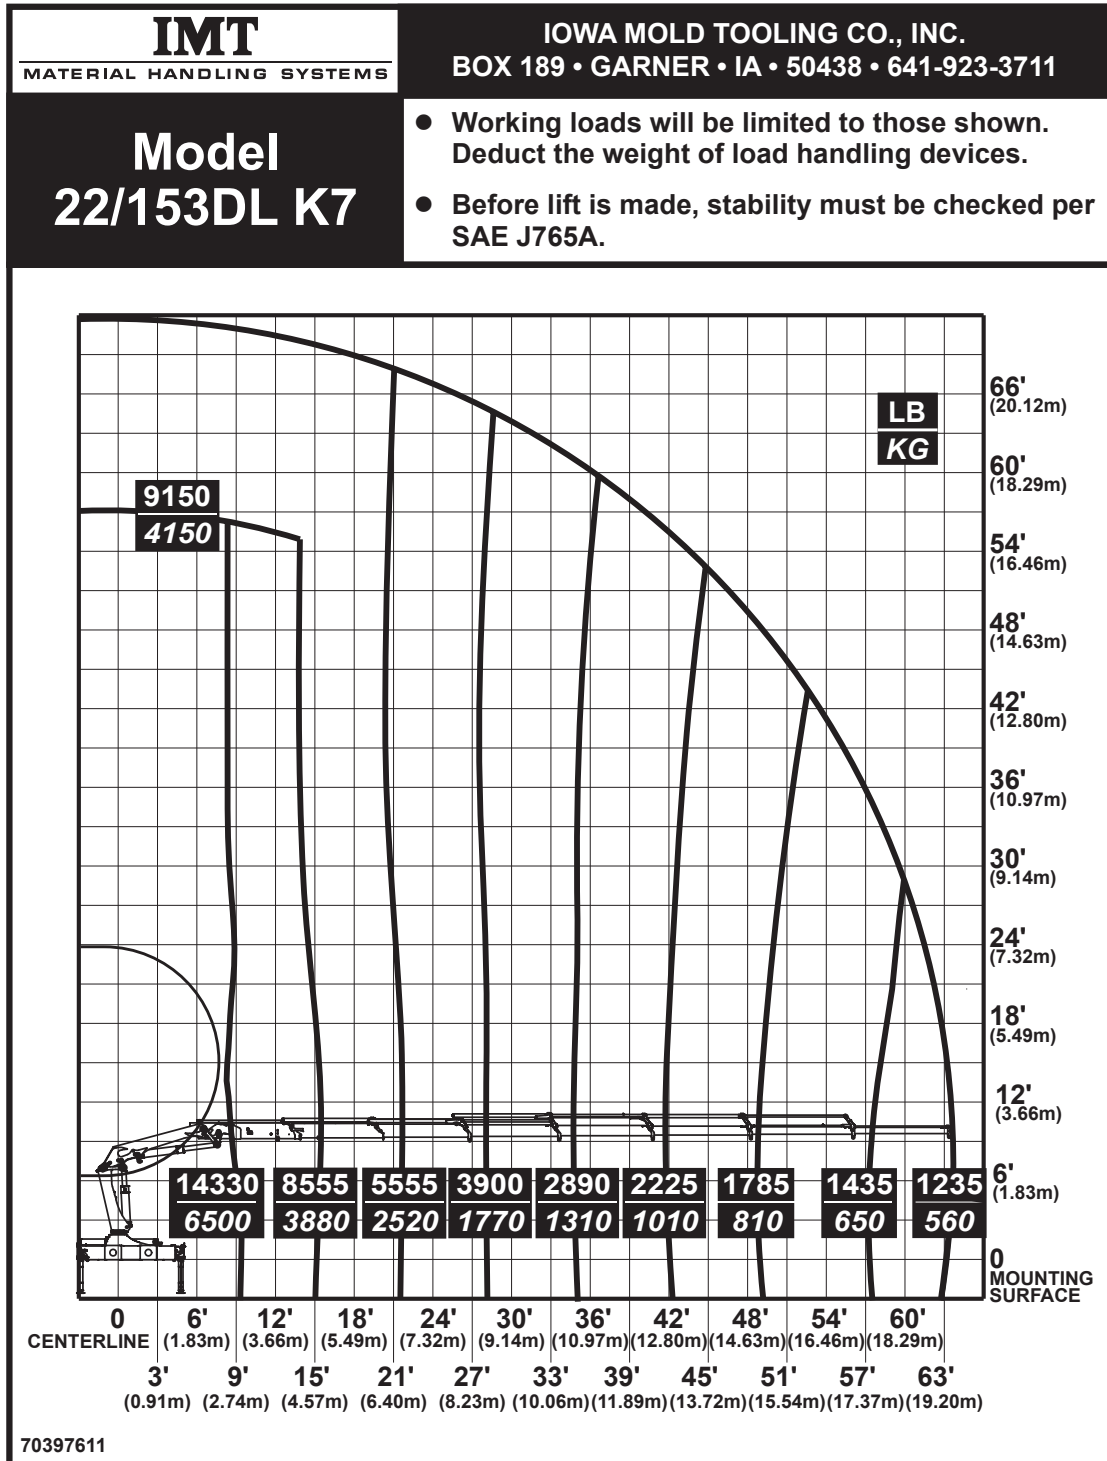

22/153DL K8 Capacity Chart

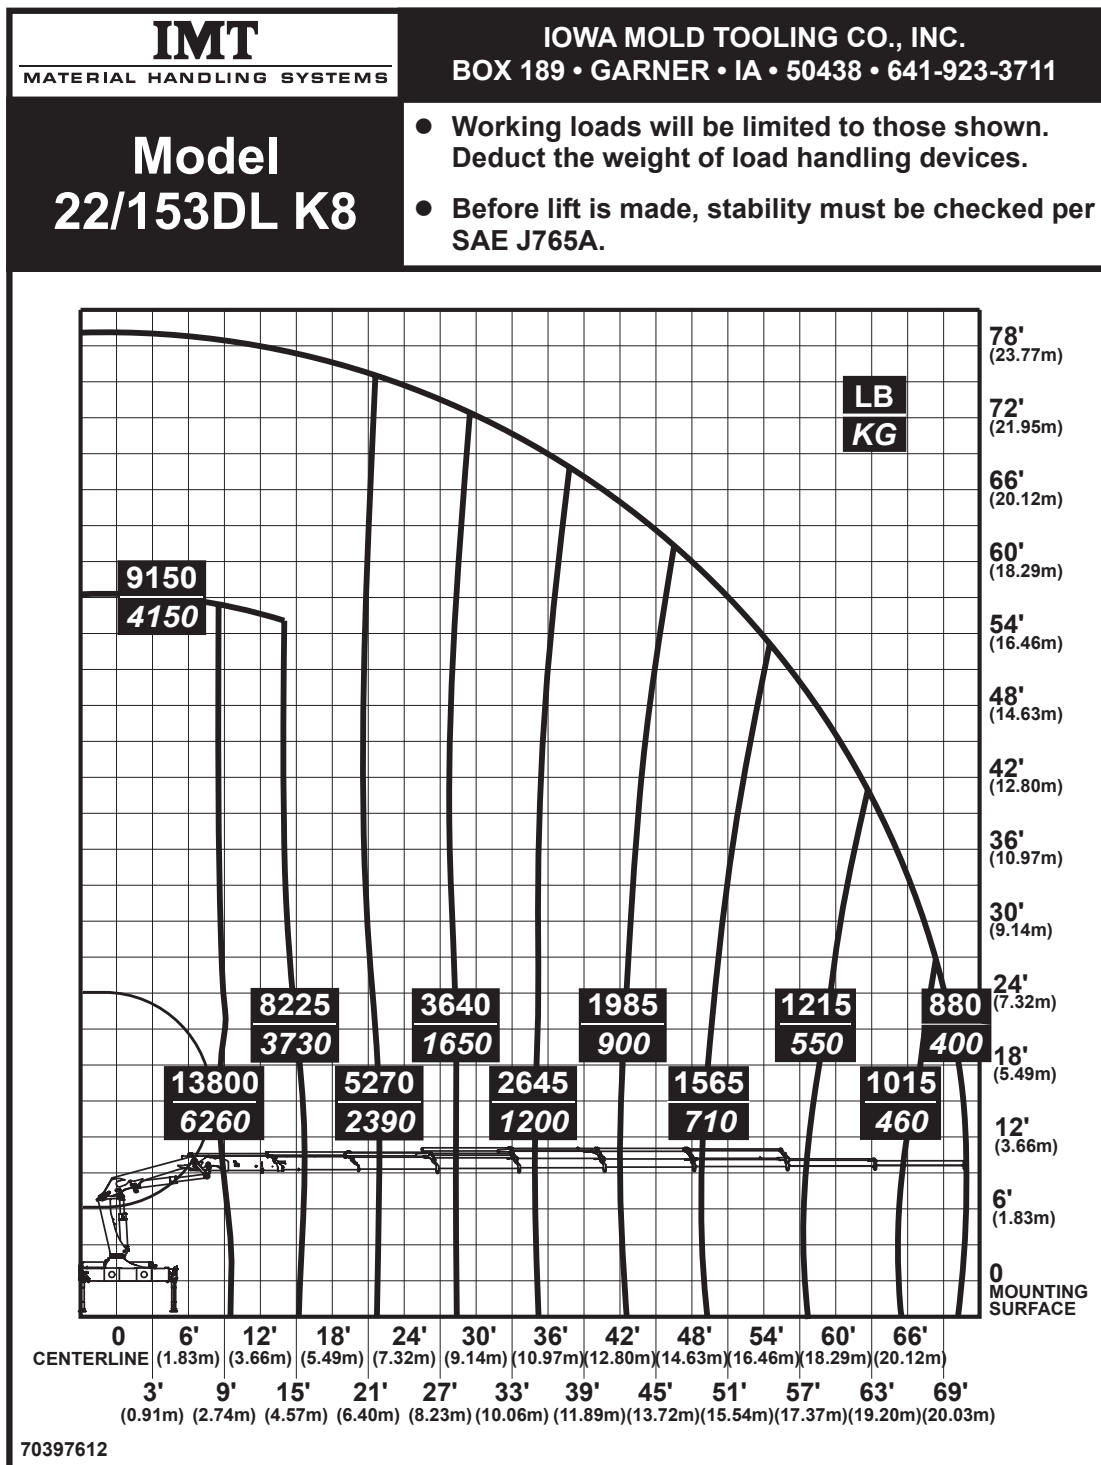

22/153DL K2-K8 Capacity Chart

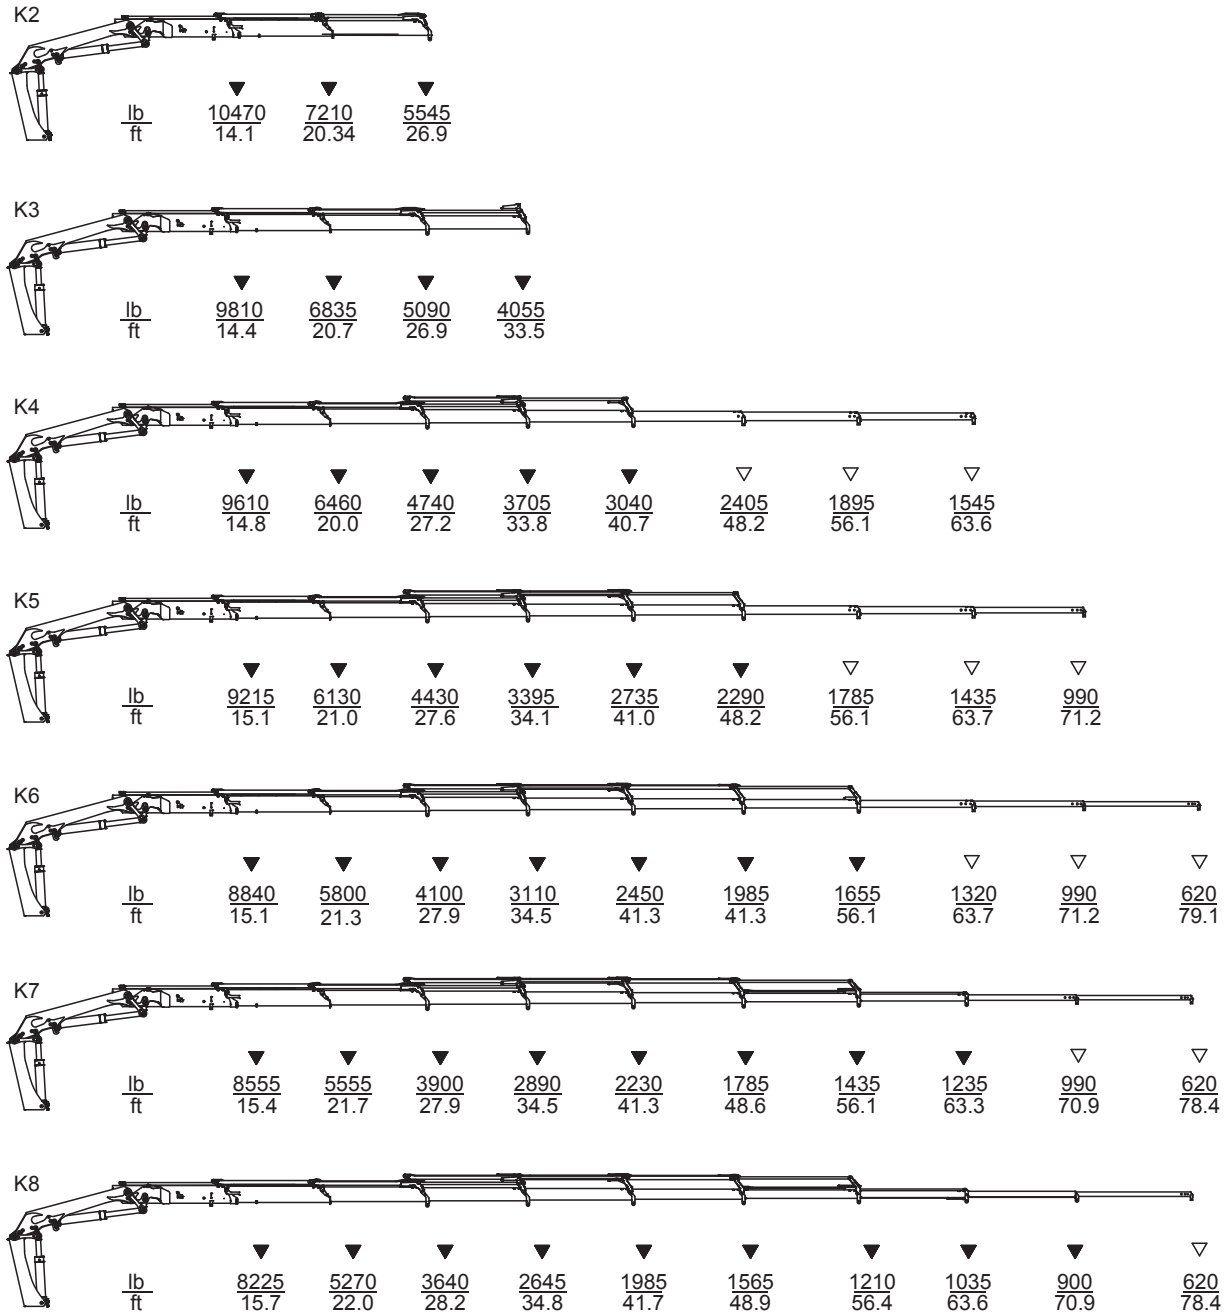

▽ Lifting capacity with man. extensions
 ▼ Lifting capacity without man. extensions

This Page Left Blank Intentionally

CHAPTER 4

24/169DL Technical Specifications

In this Chapter

24/169DL Performance	18
24/169DL Dimensions	19
24/169DL Weights, Basic Loader	19
24/169DL Weights, Equipment	20
24/169DL Max. Load on Stabilizers (Per Stabilizer Cylinders)	20
24/169DL Power Consumption / Oil Capacity	21

24/169DL Dimensions

	24/169DL K2	24/169DL K3	24/169DL K4	24/169DL K5	24/169DL K6	24/169DL K7	24/169DL K8
Height above chassis	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)
Width	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)
Length, no extra valves	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	39.17" (995 mm)	39.17" (995 mm)
Length, with extra valves (hose guides)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)		
Length, with 1 extra valve (hose reels)						39.17" (995 mm)	39.17" (995 mm)
Length, with 2 extra valves (hose reels)						40.55" (1030 mm)	40.55" (1030 mm)
Length, with extra valves (int. hose routing)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)		
Stabilizer spread, S1 (standard)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)
Stabilizer spread, D	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)

24/169DL Weights, Basic Loader

	24/169DL K2	24/169DL K3	24/169DL K4	24/169DL K5	24/169DL K6	24/169DL K7	24/169DL K8
Standard loader 1), excl. Stabilizers	4365 lb (1980 kg)	4740 lb (2150 kg)	5181 lb (2350 kg)	5512 lb (2500 kg)	5820 lb (2640 kg)	6052 lb (2745 kg)	6239 lb (2830 kg)
Stabilizers, S1 fixed	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)
Stabilizers, S1 swing-up	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)
Stabilizers, S1 hydr. swing-up	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)
Stabilizers, D fixed	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)
Stabilizers, D swing-up	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)
Stabilizers, D hydr. swing-up	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)
Mounting kit, 4 bolts	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)
Mounting kit, 8 bolts	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)
Tank, excl. oil (fitted on loader)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)
Manual extensions			176lb (80 kg)	154 lb (70 kg)	132 lb (60 kg)	88 lb (45 kg)	77l b (35 kg)
			154 lb (70 kg)	132 lb (60 kg)	88 lb (45 kg)	77 lb (35 kg)	
			132 lb (60 kg)	88 lb (45 kg)	77lb (35kg)		
Oil in loader (stowing position)	88 lb (45 kg)	110 lb (50 kg)	121 lb (55 kg)	132 lb (60 kg)	143 lb (65 kg)	154 lb (70 kg)	154 lb (70 kg)

1) Weights $\pm$ 5% because of tolerances for plate thickness

24/169DL Weights, Equipment

[illegible]

24/169DL Max. Load on Stabilizers (Per Stabilizer Cylinder)

[illegible]

24/169DL Power Consumption / Oil Capacity

[illegible]


This Page Left Blank Intentionally

CHAPTER 5


24/169DL Capacity Charts**In this Chapter**

24/169DL Capacity Chart K2	24
24/169DL Capacity Chart K3	25
24/169DL Capacity Chart K4	26
24/169DL Capacity Chart K5.....	27
24/169DL Capacity Chart K6.....	28
24/169DL Capacity Chart K7.....	29
24/169DL Capacity Chart K8	30
24/169DL Capacity Chart K2-K8	31


24/169DL Capacity Chart K2

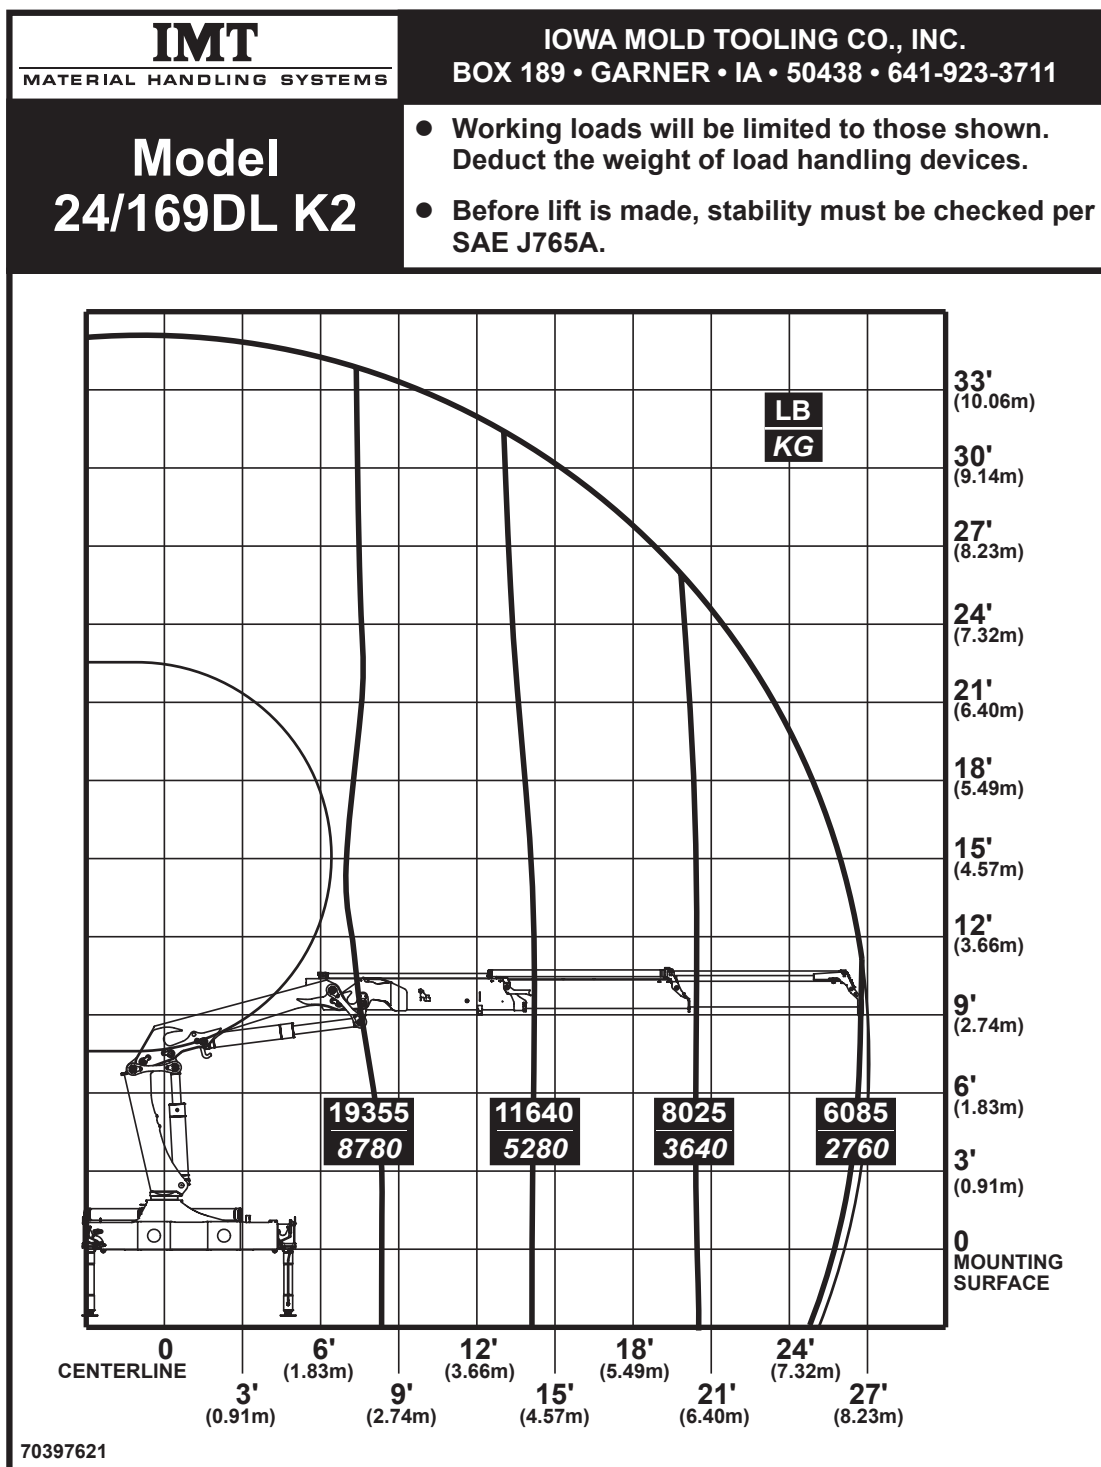


24/169DL Capacity Chart K3

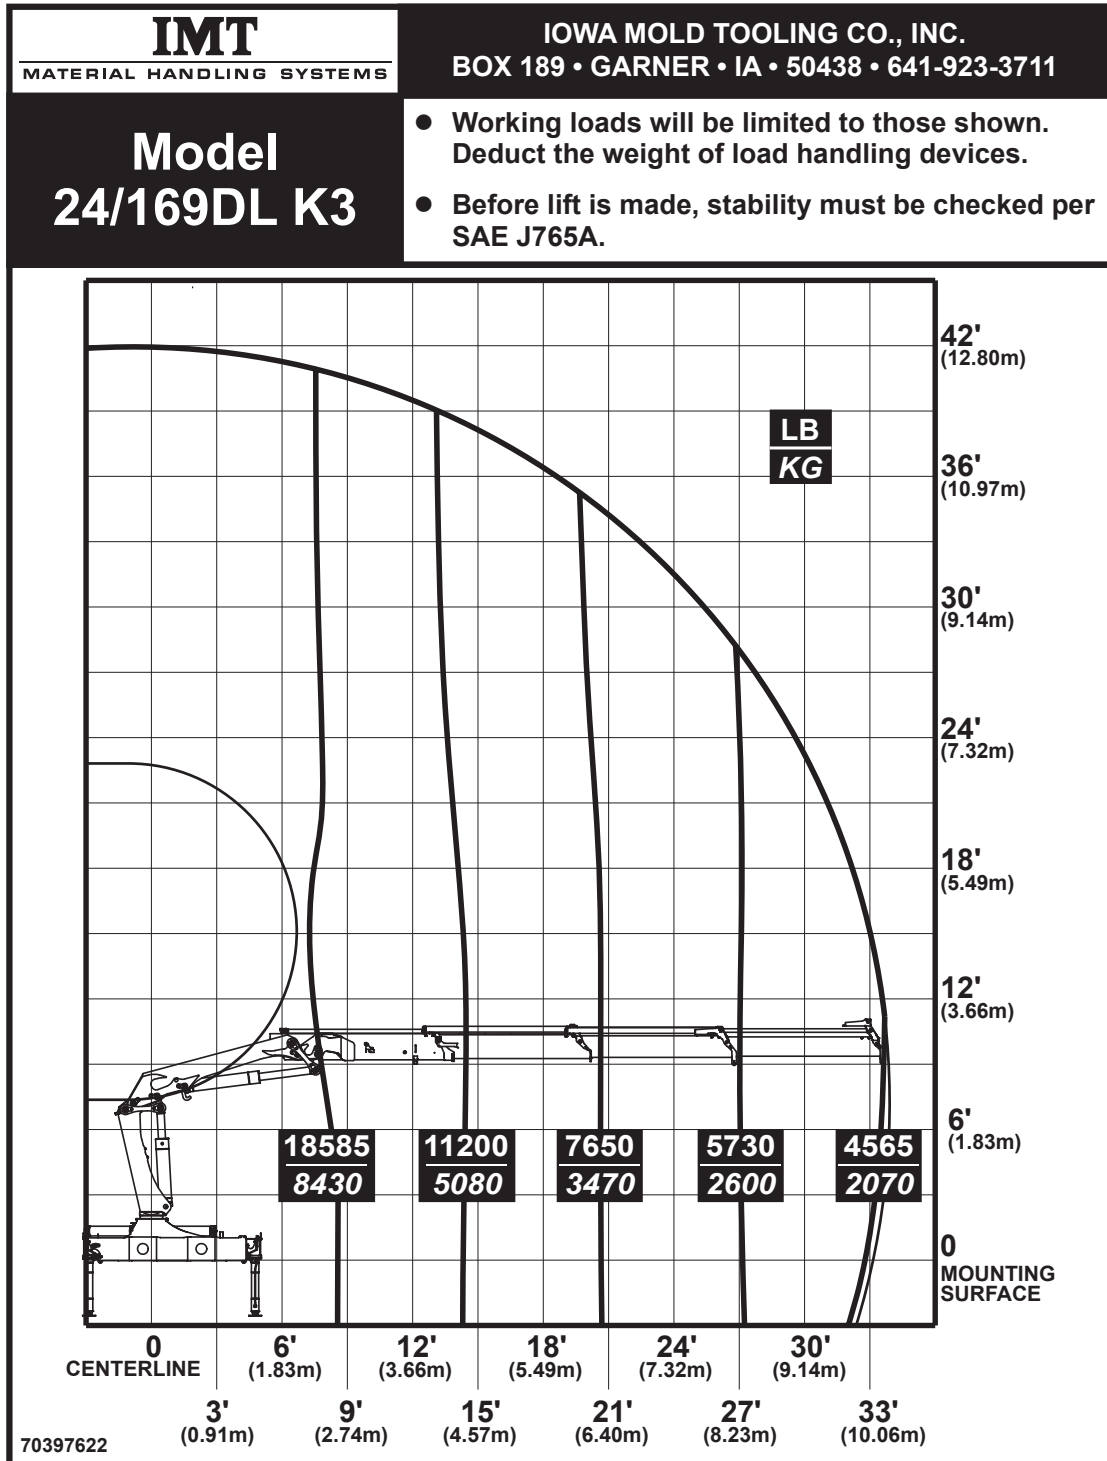


24/169DL Capacity Chart K4

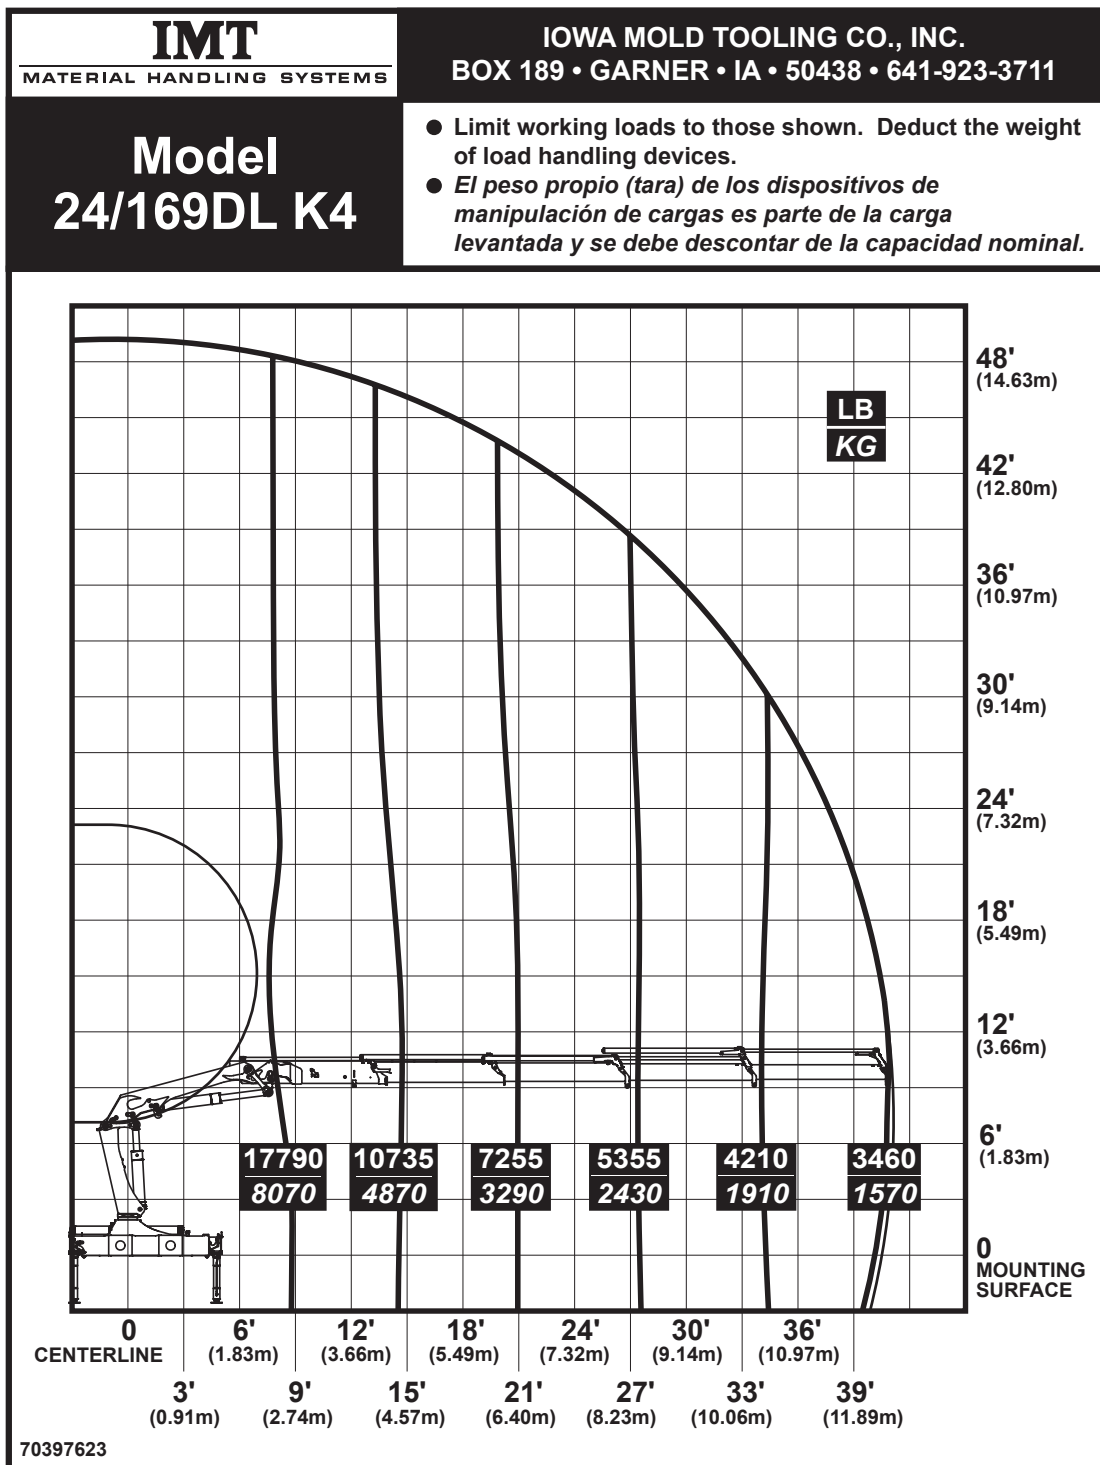


24/169DL Capacity Chart K6

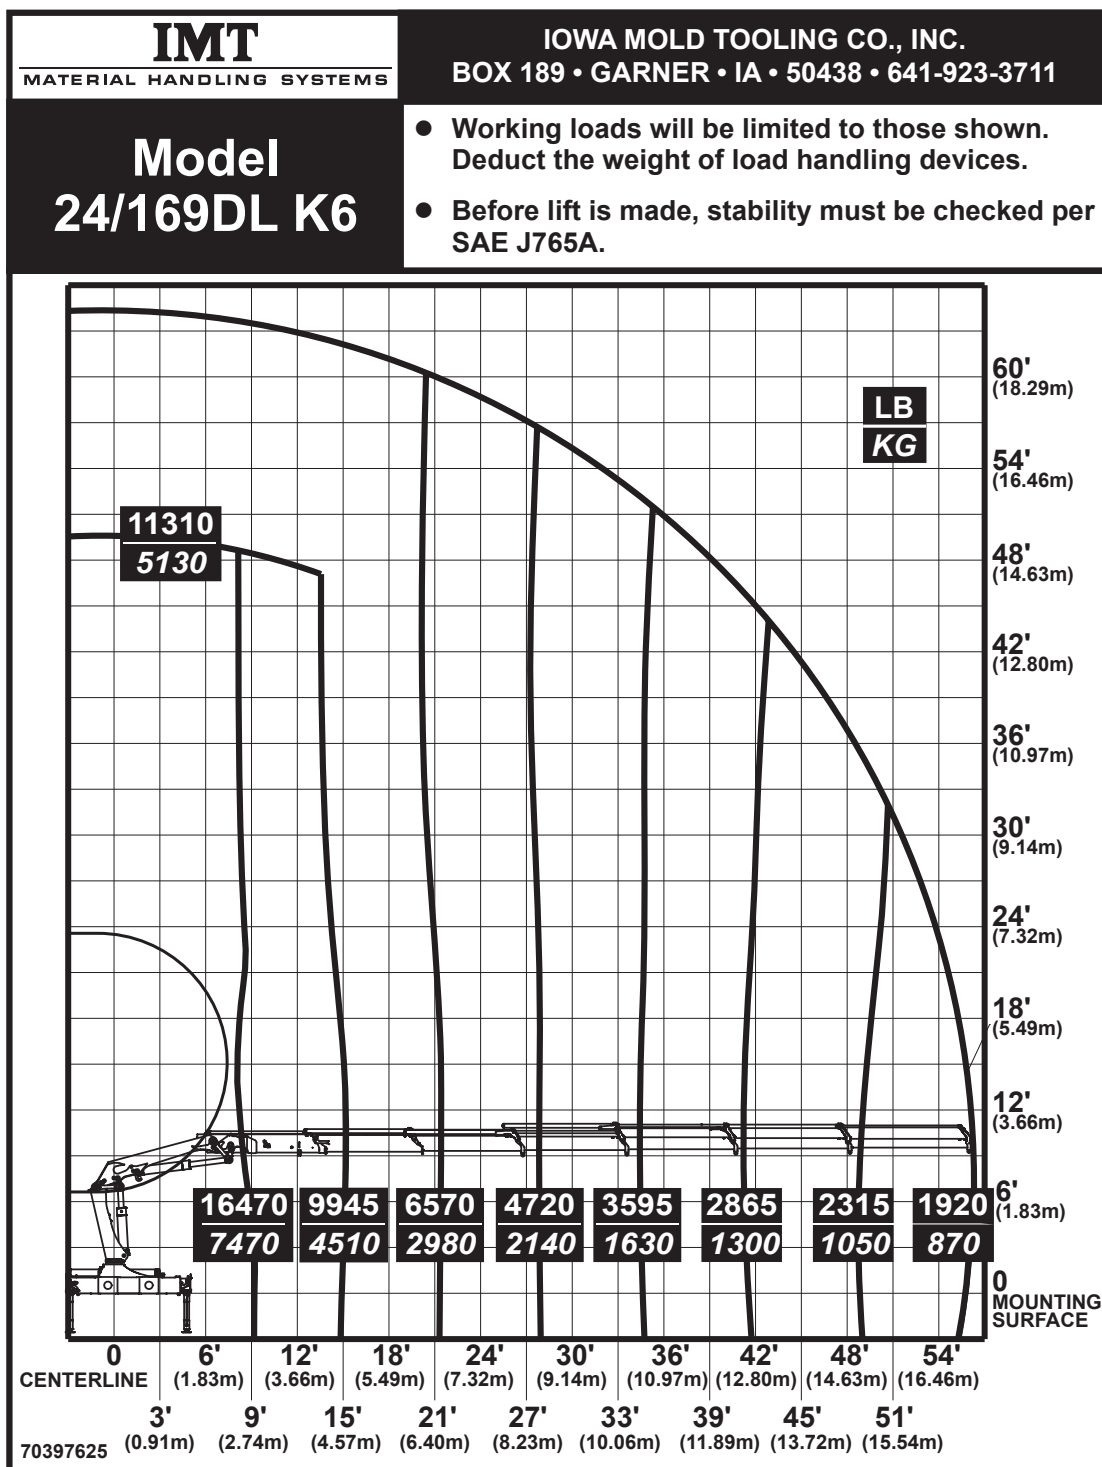








24/169DL Capacity Chart K7

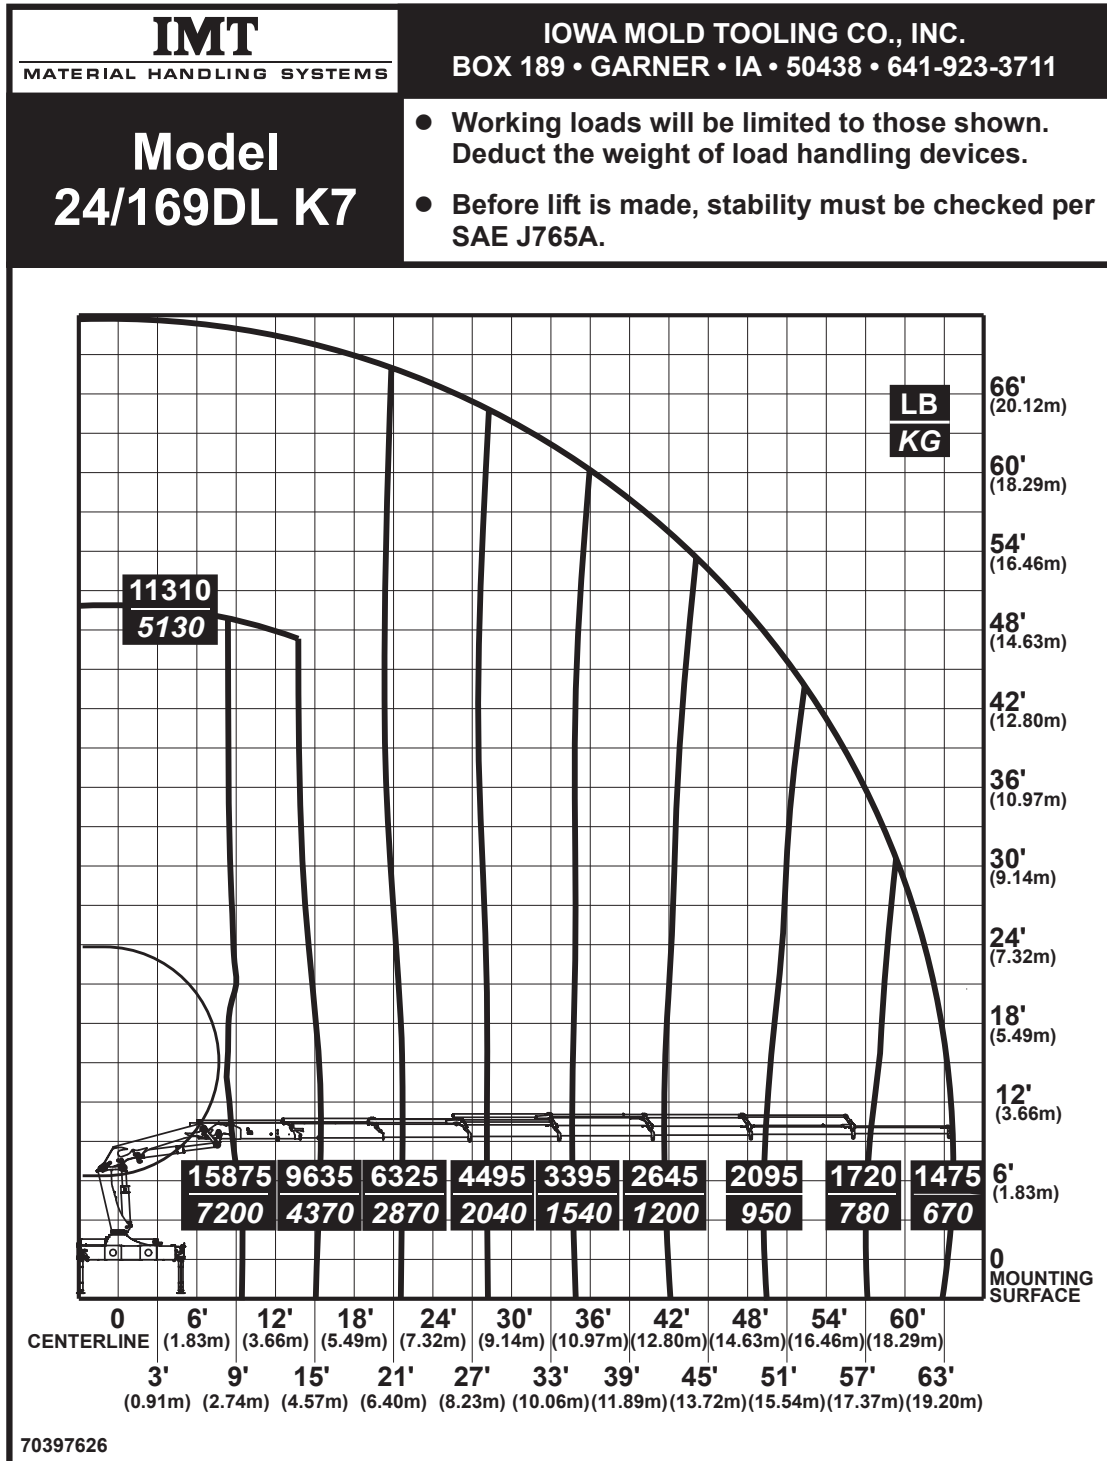

24/169DL Capacity Chart K8

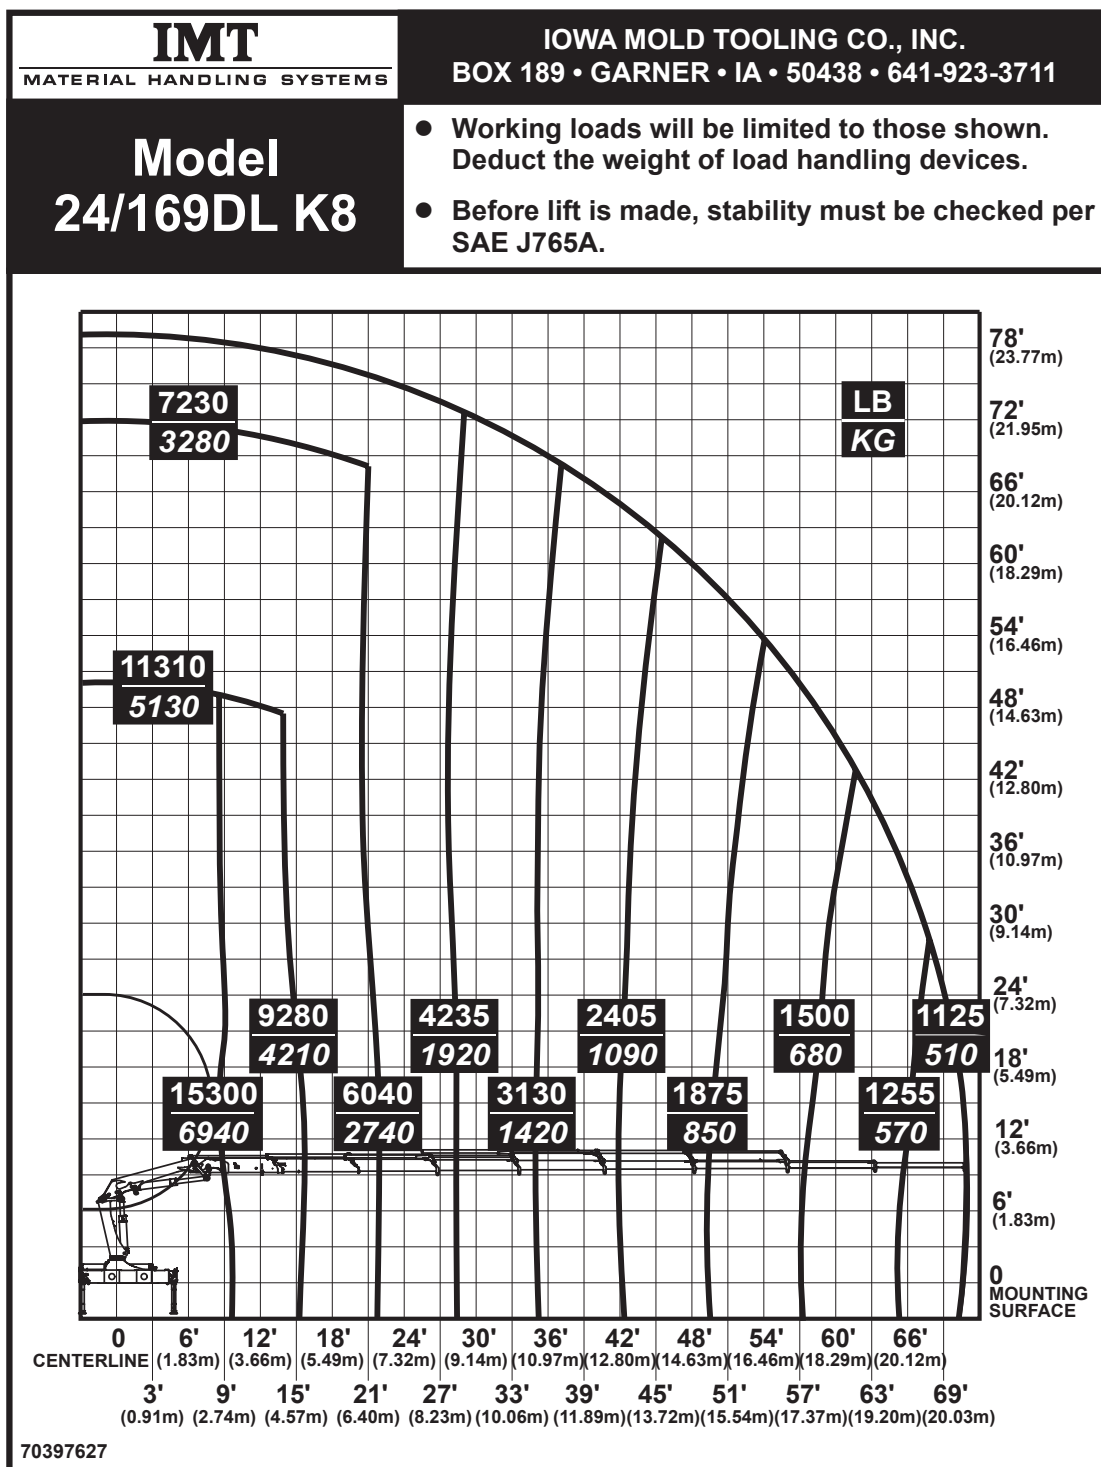

24/169DL Capacity Chart K2-K8

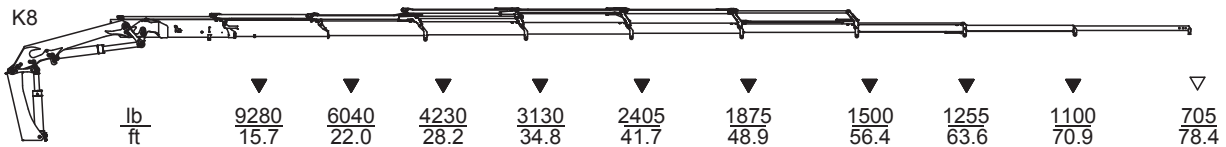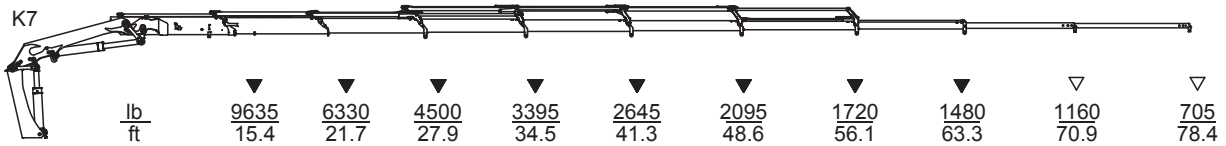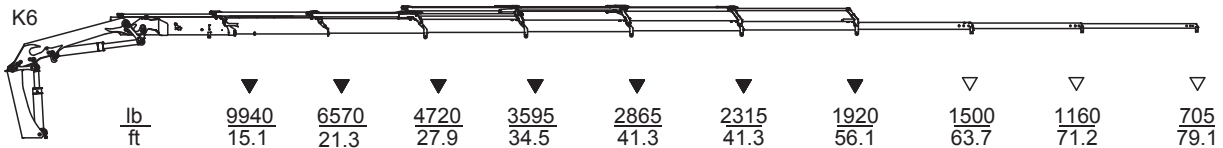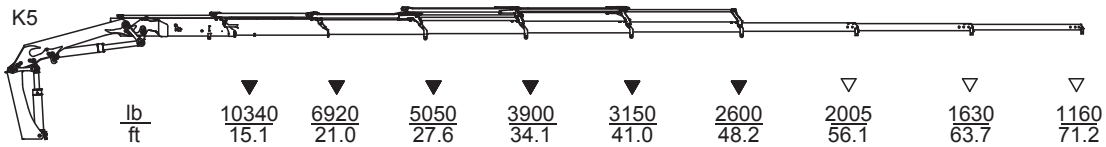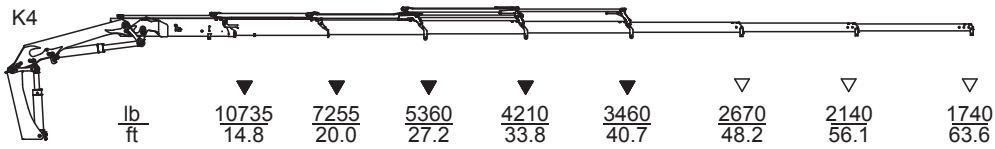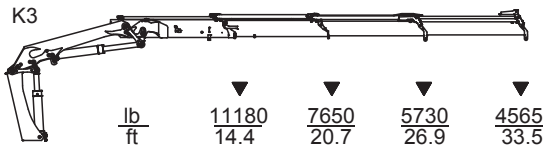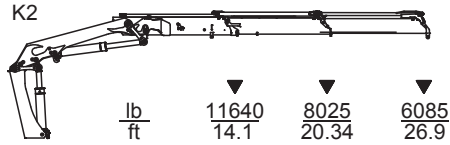

- ▽ Lifting capacity with man. extensions
▼ Lifting capacity without man. extensions

This Page Left Blank Intentionally

CHAPTER 6

26/180DL Technical Specifications

In this Chapter

26/180DL Performance	34
26/180DL Dimensions	35
26/180DL Weights, Basic Loader	35
26/180DL Weights, Equipment	36
26/180DL Max. Load on Stabilizers (Per Stabilizer Cylinders)	36
26/180DL Power Consumption / Oil Capacity	37

26/180DL Dimensions

	26/180DL K2	26/180DL K3	26/180DL K4	26/180DL K5	26/180DL K6	26/180DL K7	26/180DL K8
Height above chassis	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)
Width	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)
Length, no extra valves	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	39.17" (995 mm)	39.17" (995 mm)
Length, with extra valves (hose guides)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)		
Length, with 1 extra valve (hose reels)						39.17" (995 mm)	39.17" (995 mm)
Length, with 2 extra valves (hose reels)						40.55" (1030 mm)	40.55" (1030 mm)
Length, with extra valves (int. hose routing)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)		
Stabilizer spread, S1 (standard)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)
Stabilizer spread, D	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)

26/180DL Weights, Basic Loader

	26/180DL K2	26/180DL K3	26/180DL K4	26/180DL K5	26/180DL K6	26/180DL K7	26/180DL K8
Standard loader 1), excl. Stabilizers	4365 lb (1980 kg)	4740 lb (2150 kg)	5181 lb (2350 kg)	5512 lb (2500 kg)	5820 lb (2640 kg)	6052 lb (2745 kg)	6239 lb (2830 kg)
Stabilizers, S1 fixed	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)
Stabilizers, S1 swing-up	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)
Stabilizers, S1 hydr. swing-up	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)
Stabilizers, D fixed	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)
Stabilizers, D swing-up	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)
Stabilizers, D hydr. swing-up	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)
Mounting kit, 4 bolts	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)
Mounting kit, 8 bolts	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)
Tank, excl. oil (fitted on loader)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)z
Manual extensions			176 lb (80 kg)	154 lb (70 kg)	132 lb (60 kg)	88 lb (45 kg)	77 lb (35 kg)
			154 lb (70 kg)	132 lb (60 kg)	88 lb (45 kg)	77 lb (35 kg)	
			132 lb (60 kg)	88 lb (45 kg)	77 lb (35 kg)		
Oil in loader (stowing position)	88 lb (45 kg)	110 lb (50 kg)	121 lb (55 kg)	132 lb (60 kg)	143 lb (65 kg)	154 lb (70 kg)	154 lb (70 kg)

1) Weights ± 5% because of tolerances for plate thickness

[illegible]

26/180DL Max. Load on Stabilizers (Per Stabilizer Cylinder)

[illegible]

26/180DL Power Consumption / Oil Capacity

[illegible]

This Page Left Blank Intentionally

CHAPTER 7

26/180DL Capacity Charts

In this Chapter

24/169DL Capacity Chart K240

24/169DL Capacity Chart K341

24/169DL Capacity Chart K442

24/169DL Capacity Chart K543


24/169DL Capacity Chart K644

24/169DL Capacity Chart K745


24/169DL Capacity Chart K846

24/169DL Capacity Chart K2-K847


26/180DL Capacity Chart K2

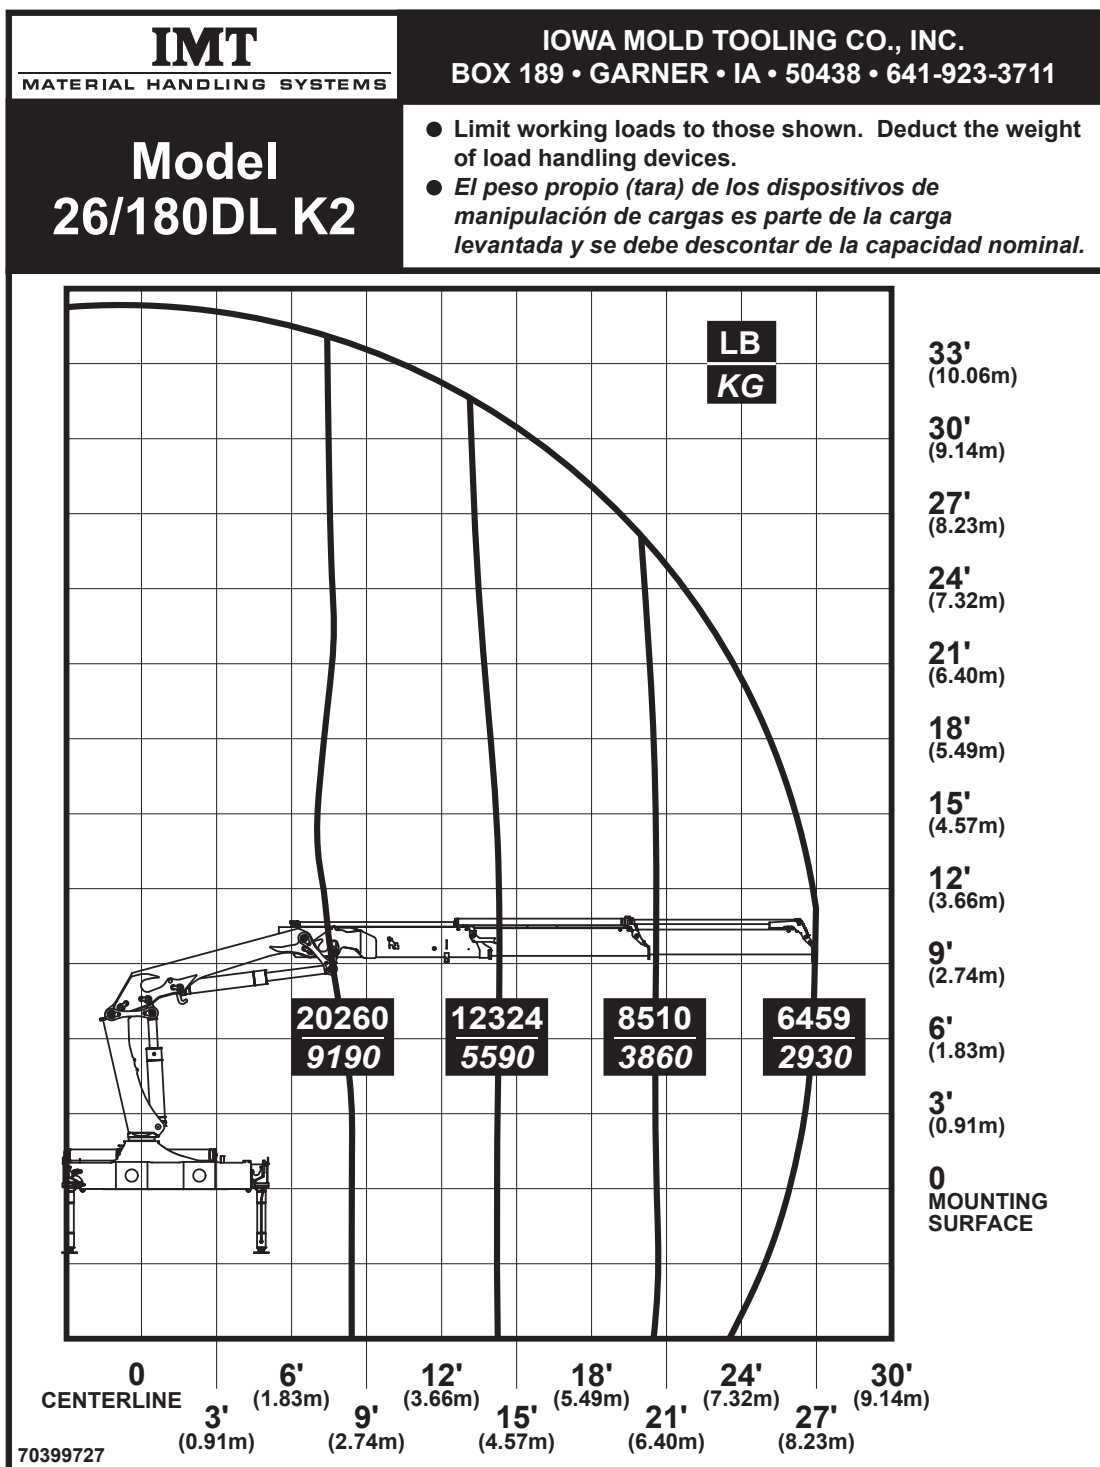


26/180DL Capacity Chart K3

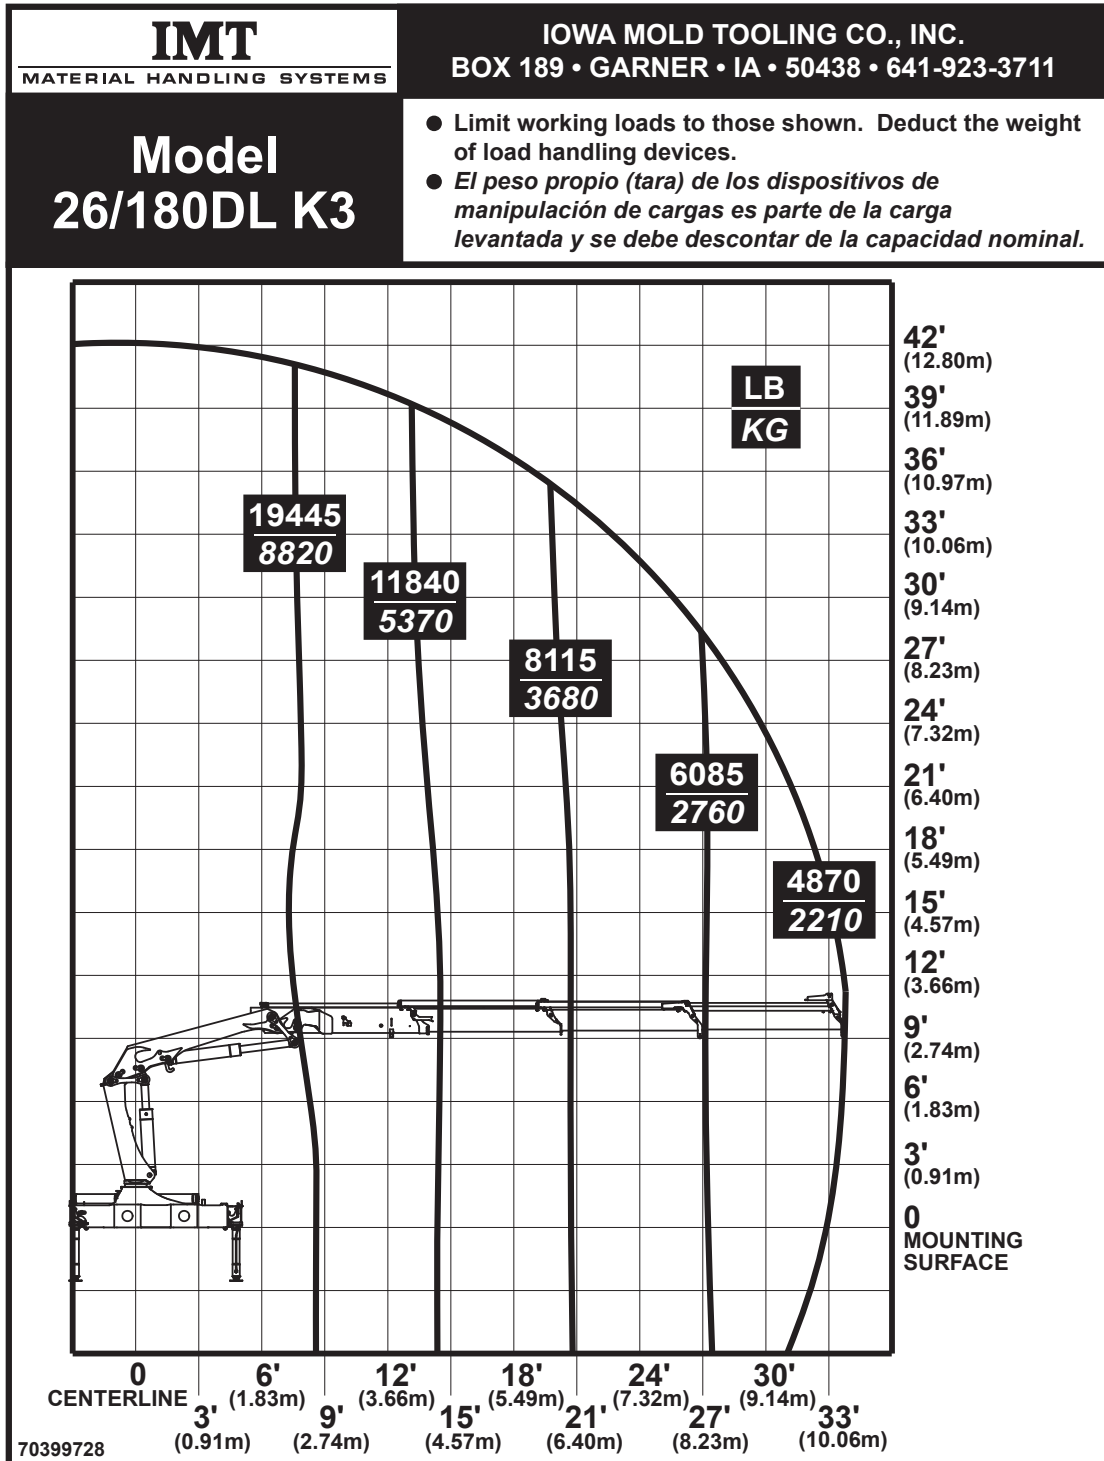


26/180DL Capacity Chart K4

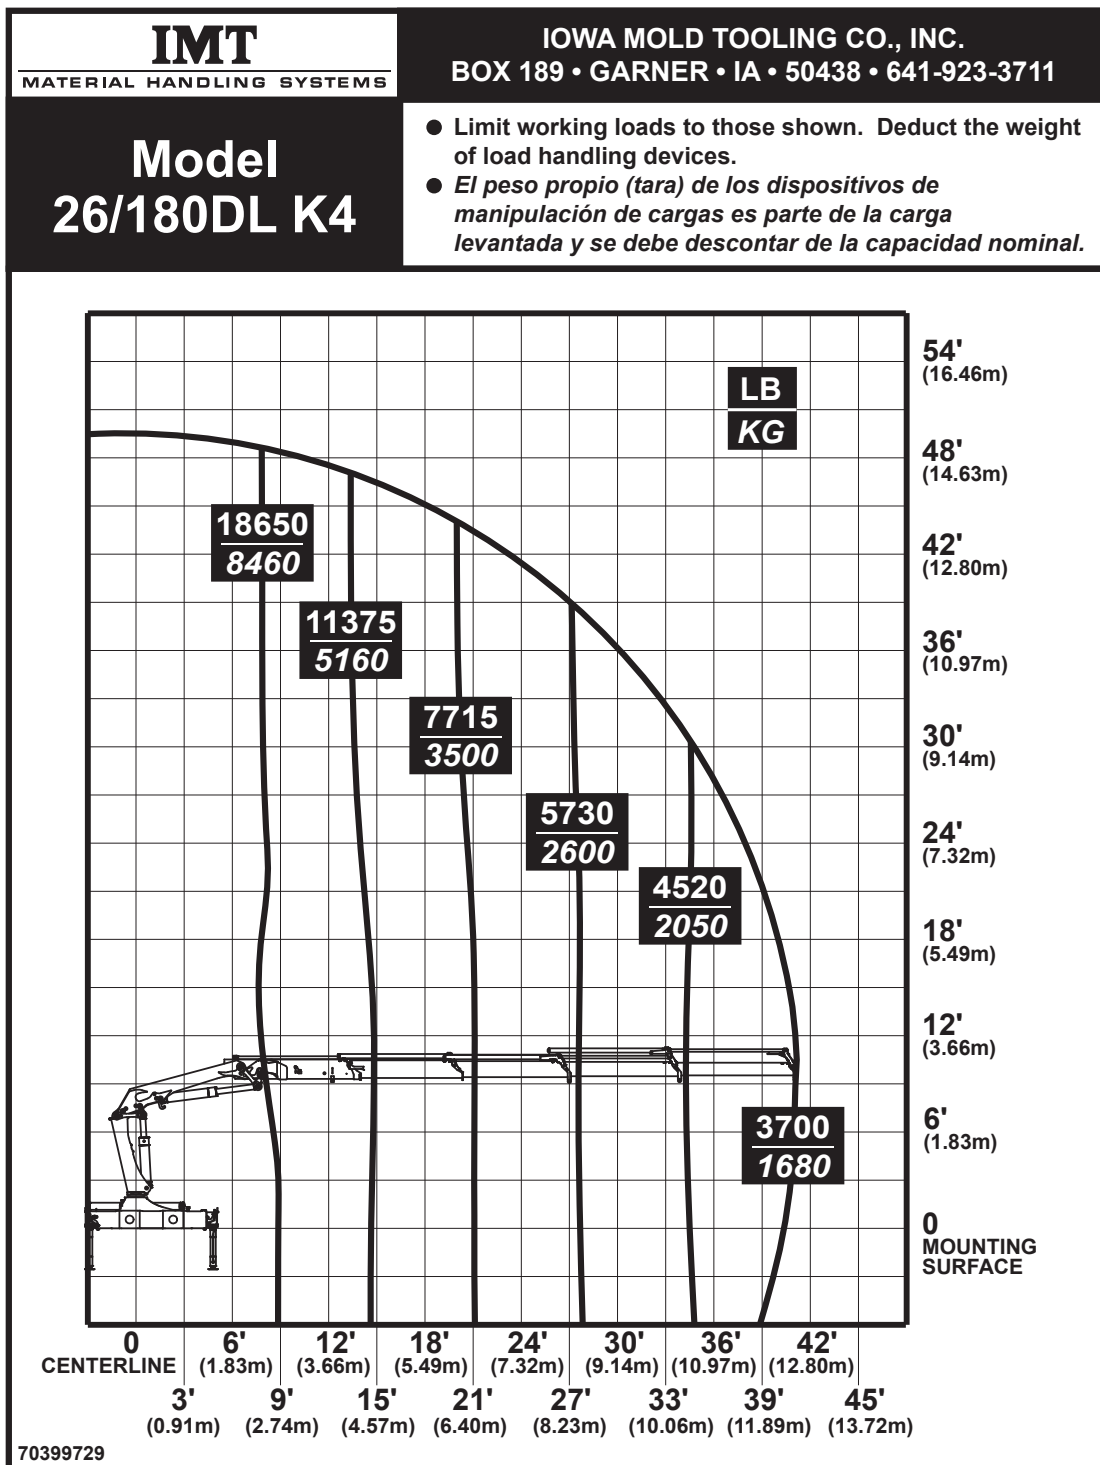


26/180DL Capacity Chart K5

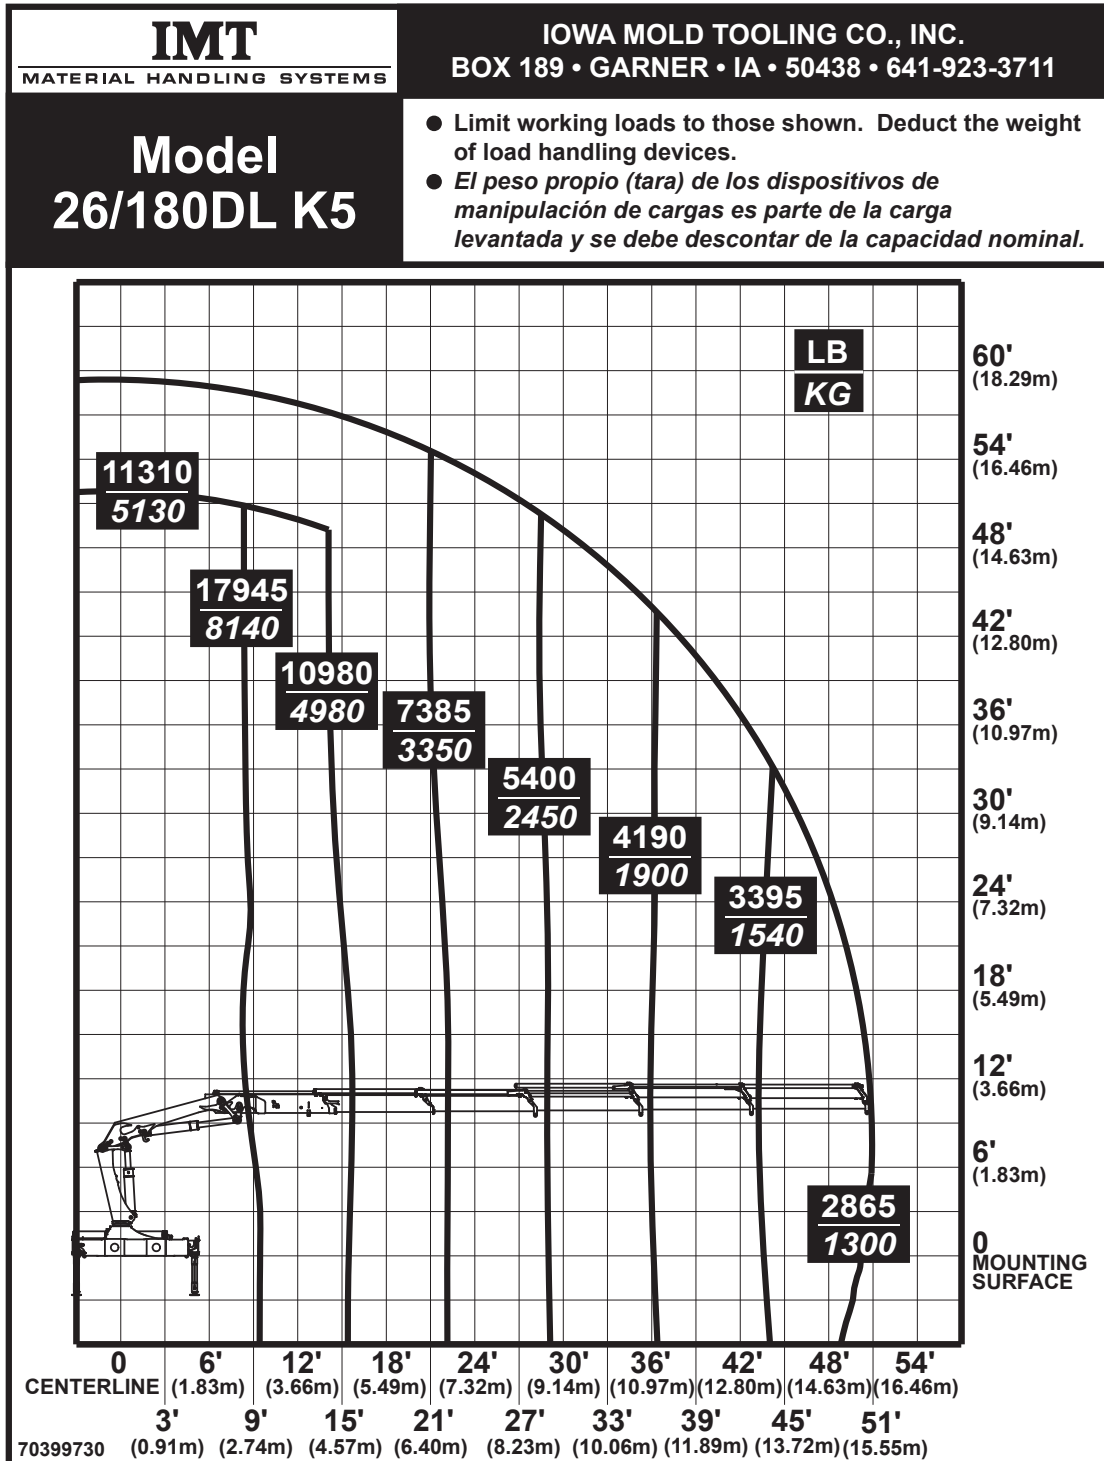


26/180DL Capacity Chart K6

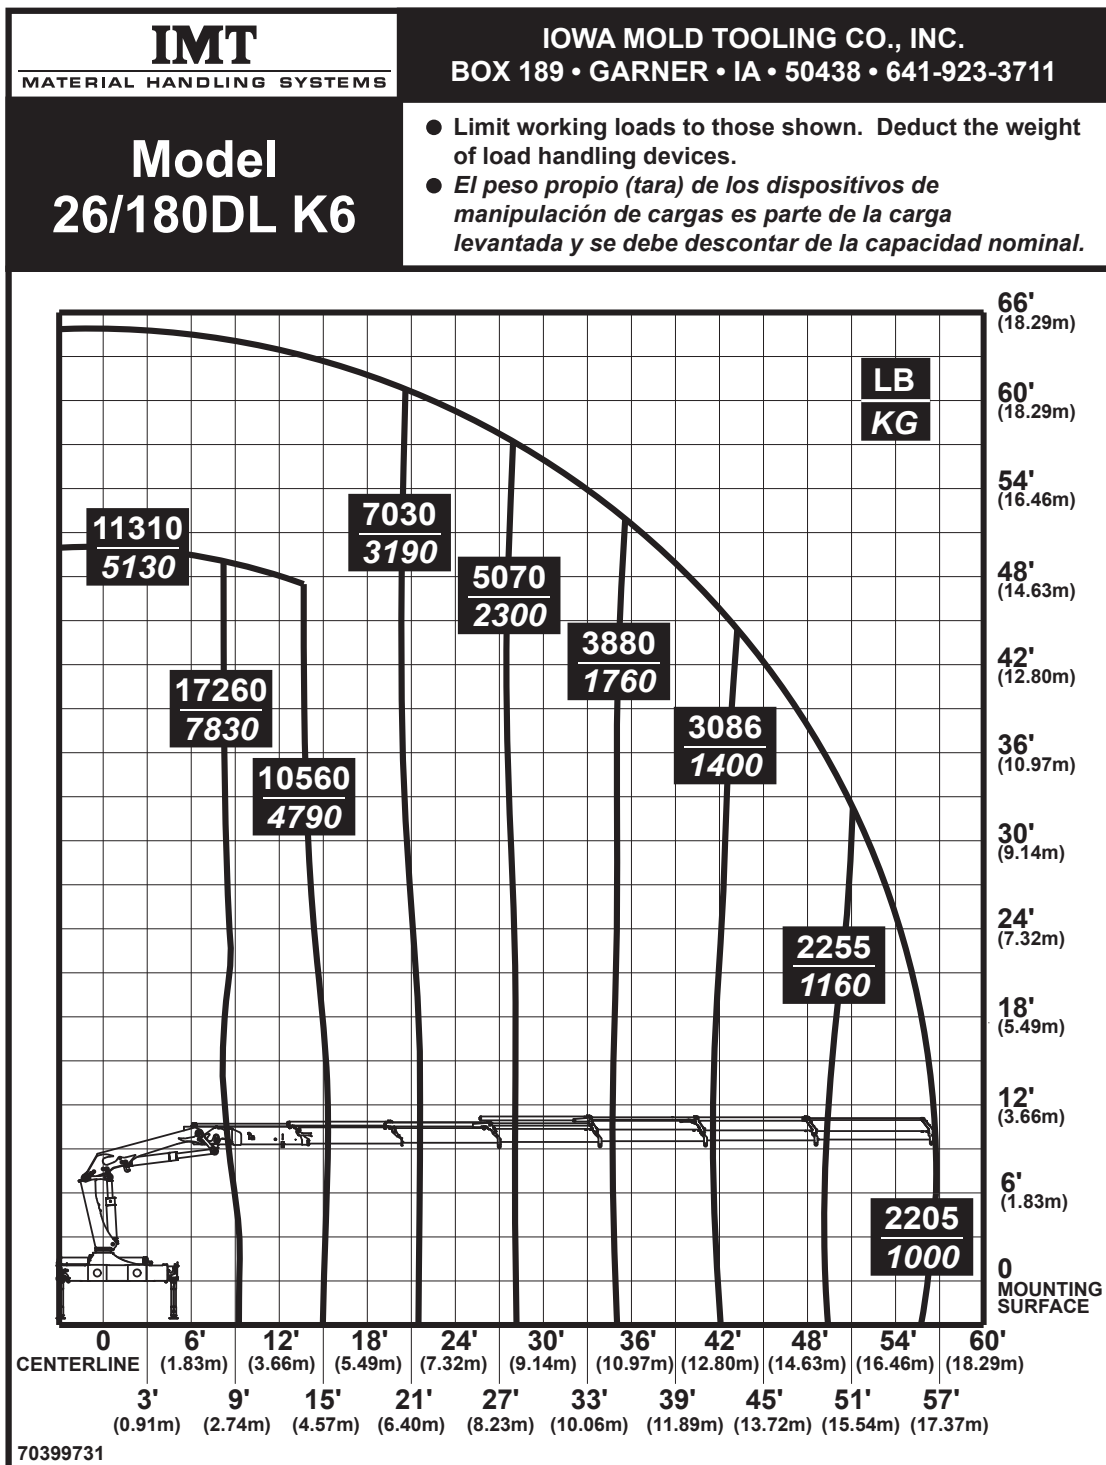


26/180DL Capacity Chart K7

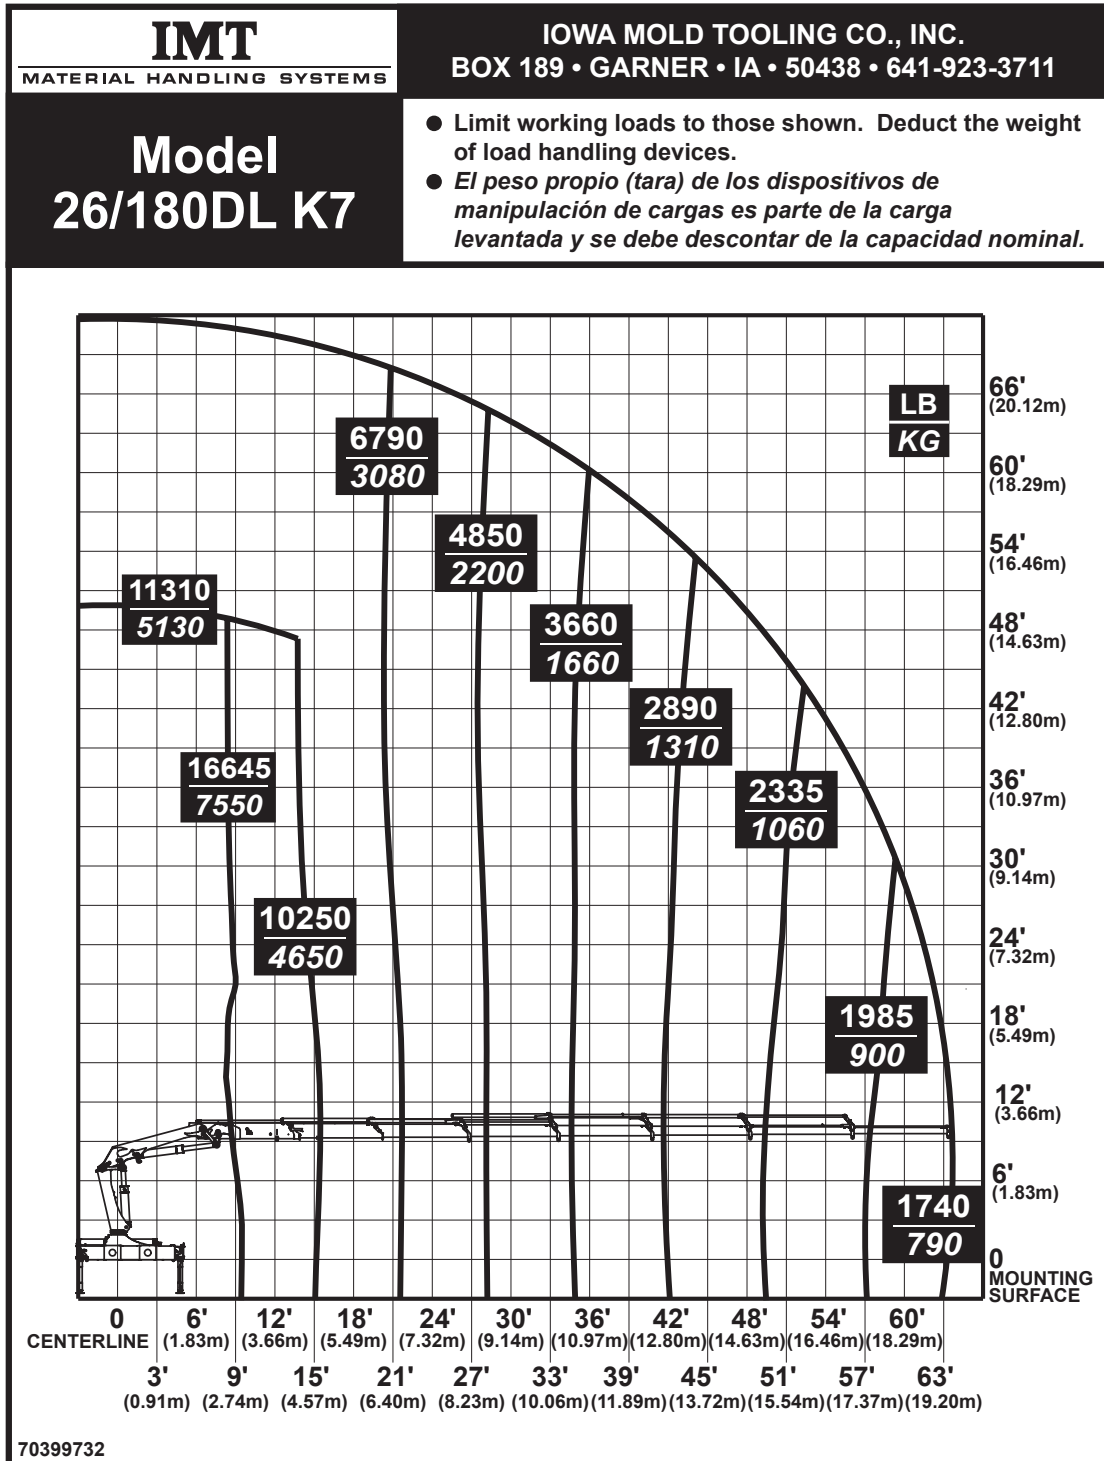

26/180DL Capacity Chart K8

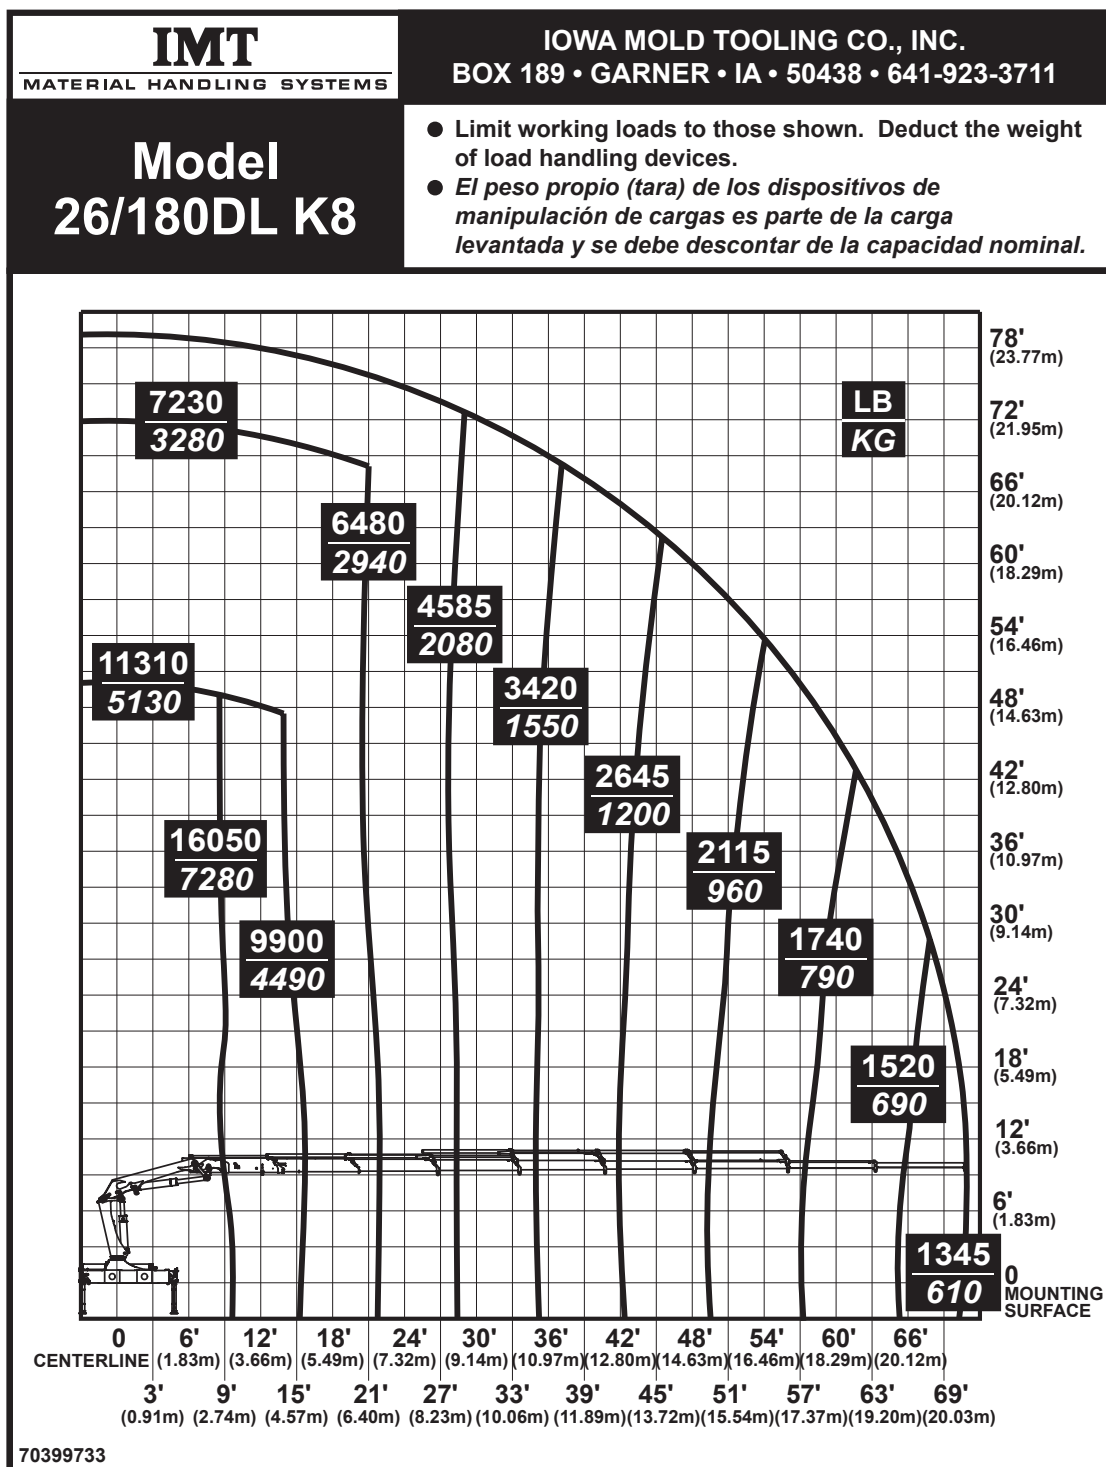

26/180DL Capacity Chart K2 - K8

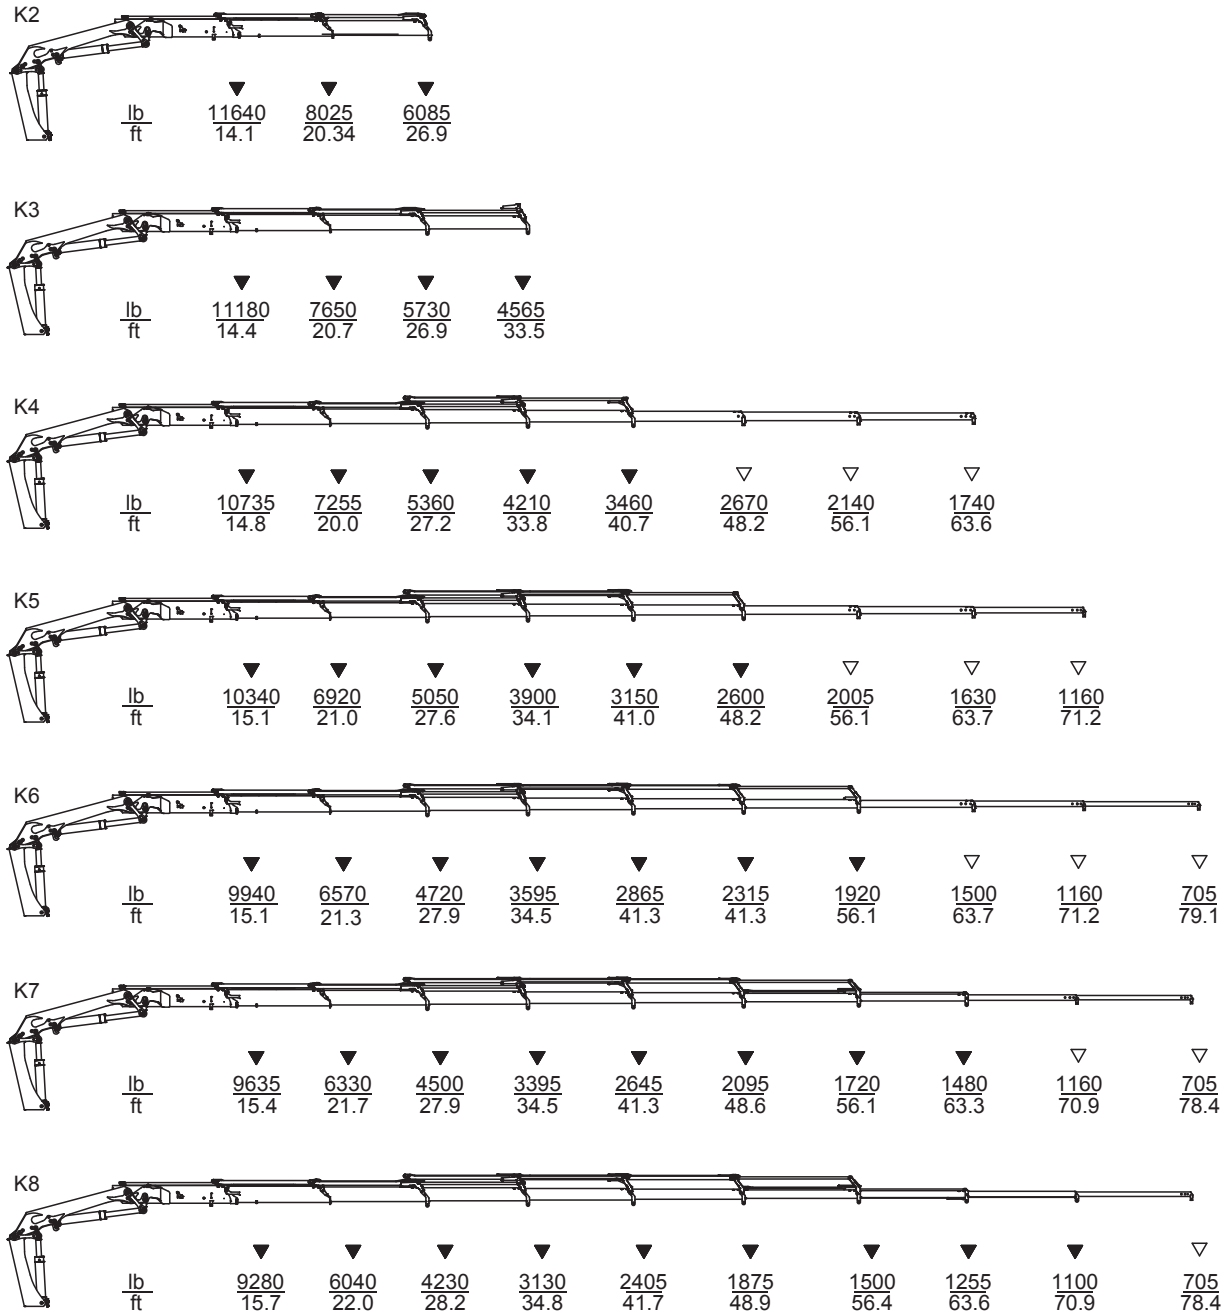

- ▽ Lifting capacity with man. extensions
 ▼ Lifting capacity without man. extensions


This Page Left Blank Intentionally

CHAPTER 3


22/153DL, 24/169DL, 26/180DL Dimension Sketches**In this Chapter**

Dimension Sketch	50
Slewing Radius	51
Truck-Mounted Loader	52
Lifting at Column	53
Fixed Stabilizer Legs	54
Fixed Stabilizer Legs	55
Swing-up Stabilizer Legs 20° - 60° (Manual)	56
Swing-up Stabilizer Legs 20° - 60° (Manual)	57
Swing-up Stabilizer Legs 180° (Manual + Hydraulic)	58
Swing-up Stabilizer Legs 180° (Manual + Hydraulic)	59
TS Top Seat (RC)	60
TS Top Seat (HC Linear)	61
TS Top Seat (Danfoss X)	62
TS Top Seat (HC X)	63
Ladder for TS	64
Winch	65
Winch	66
Stand-Up Platform (Std)	67
Stand-Up Platform (Valve Control)	68
Internal Hose Routing K2-K6	69
Extra Valves K7,K8	70
Stowed in Truck Body	71
Centers of Gravity	72

Dimension Sketch


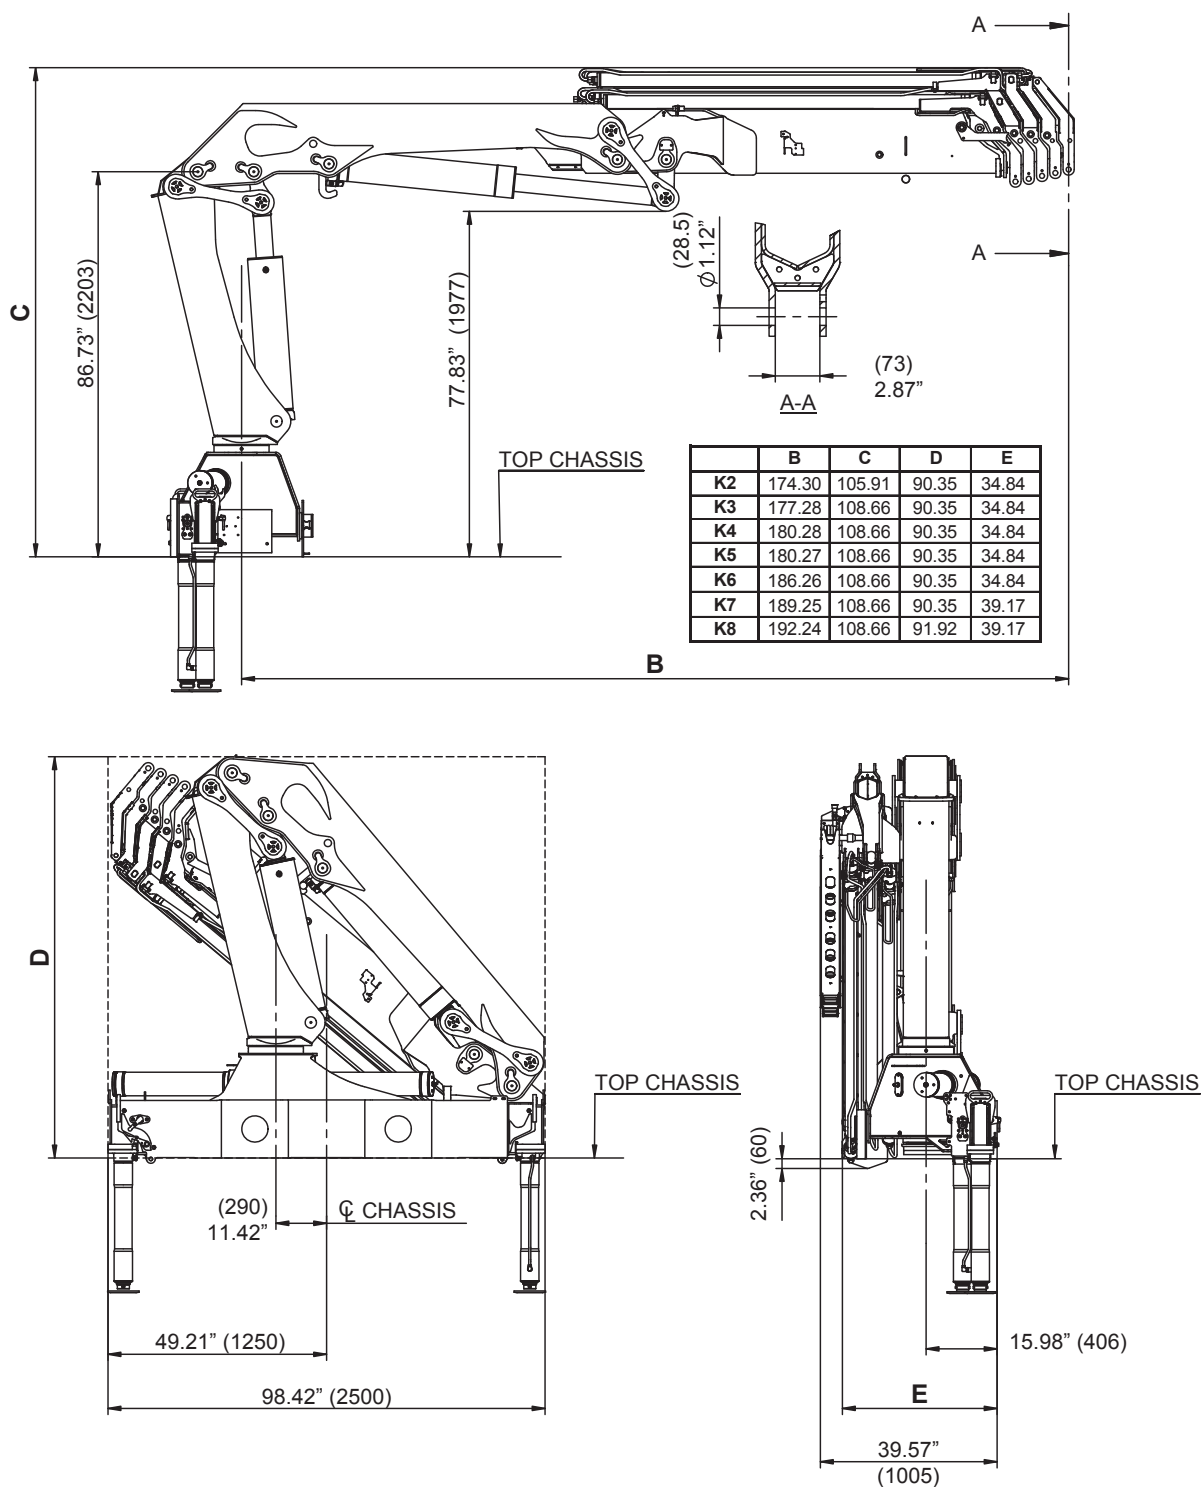


Slewing Radius

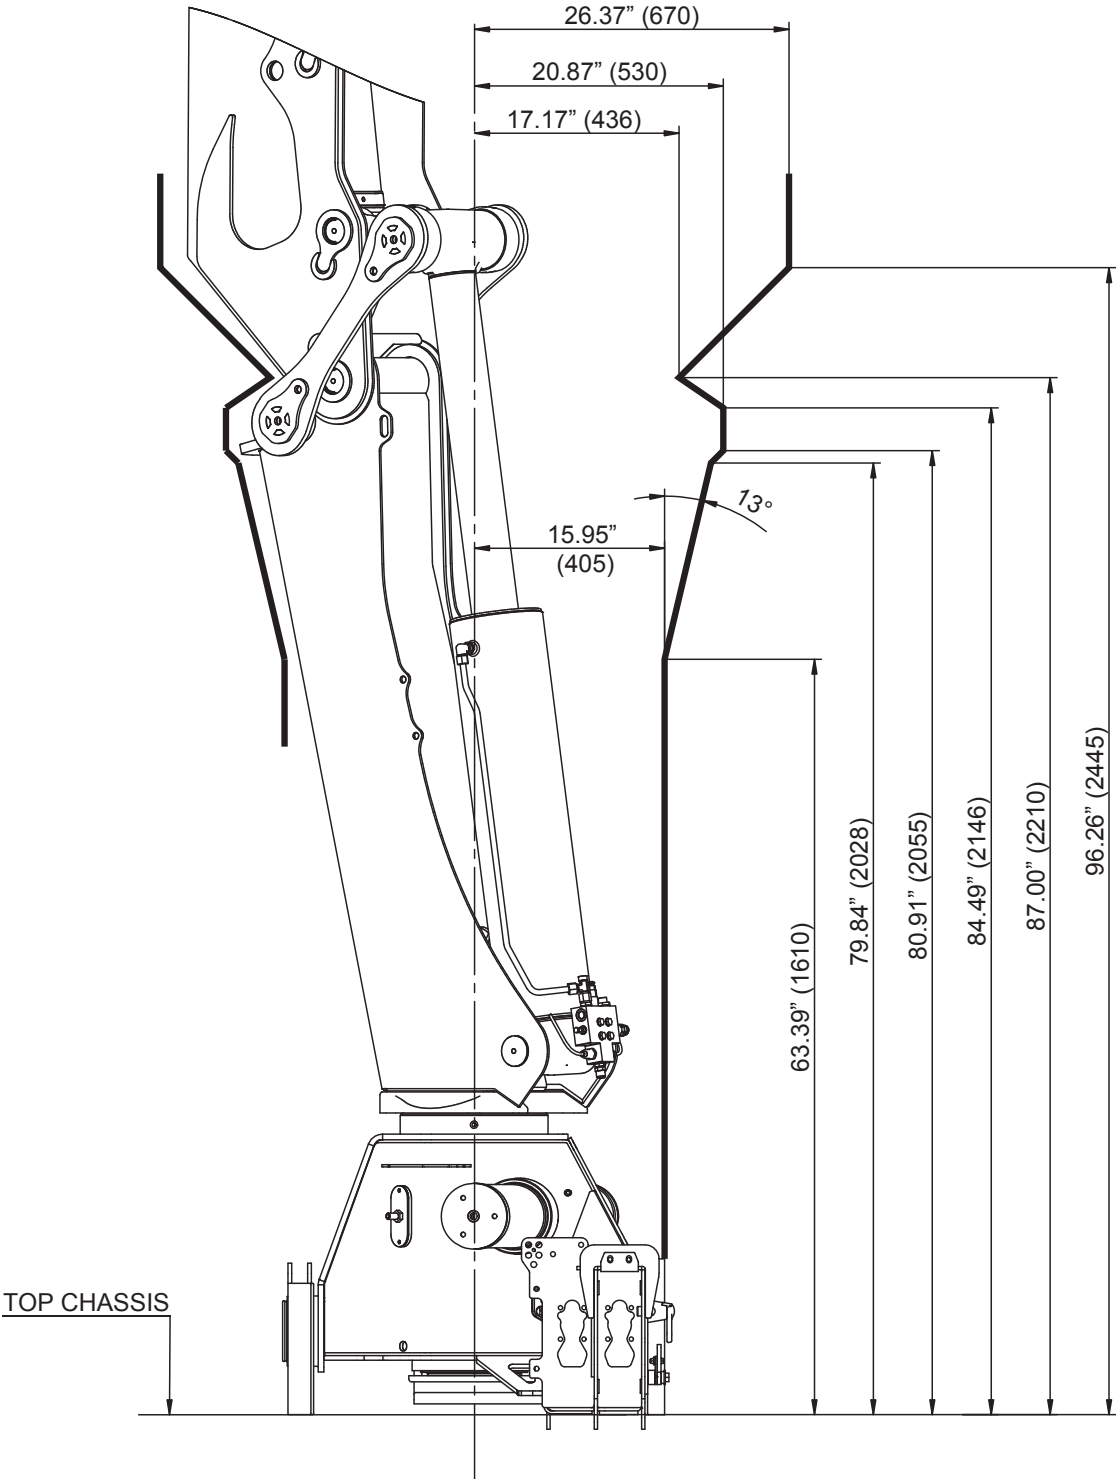


Truck-Mounted Loader

Mounting kit 8 x M24x2 bolts

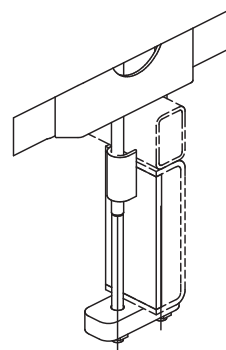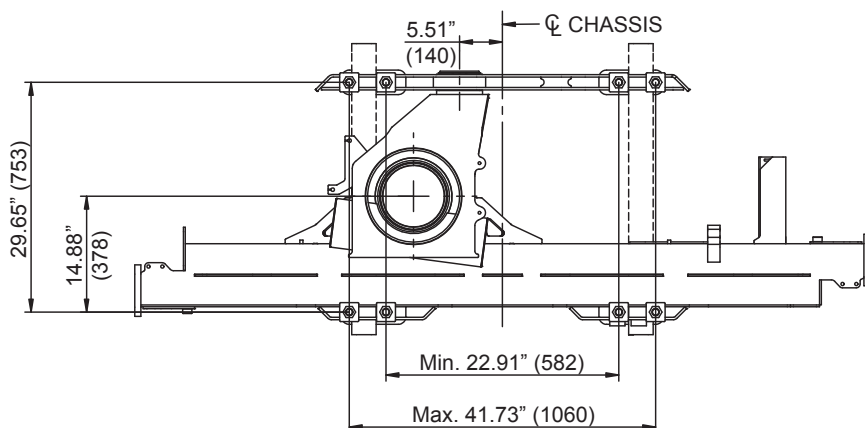


Notes:



- 1) Values dictated by strength considerations.
- 2) Drill hole when assembling
- 3) As regards installation - please see IMT Installation Manual
- 4) Mounting kits or spare parts - please see the Spare Parts Catalogue of the individual loader




See note 2)



Mounting kit 3 x M33x2 bolts + 1 x M30x2 bolts

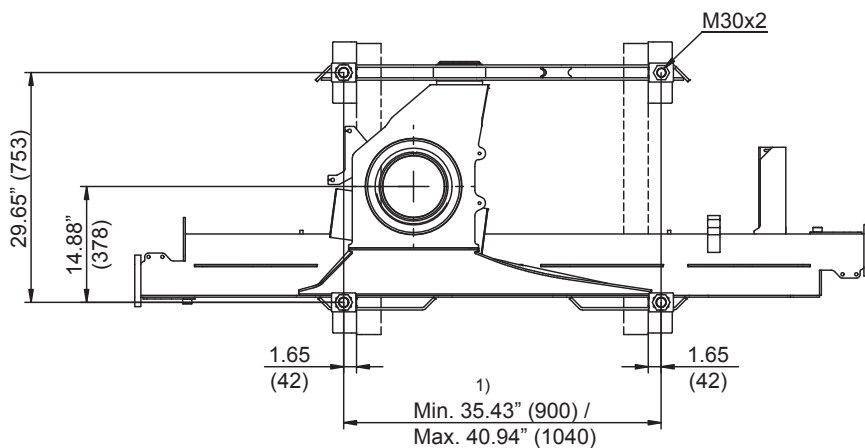


Lifting Height at Column

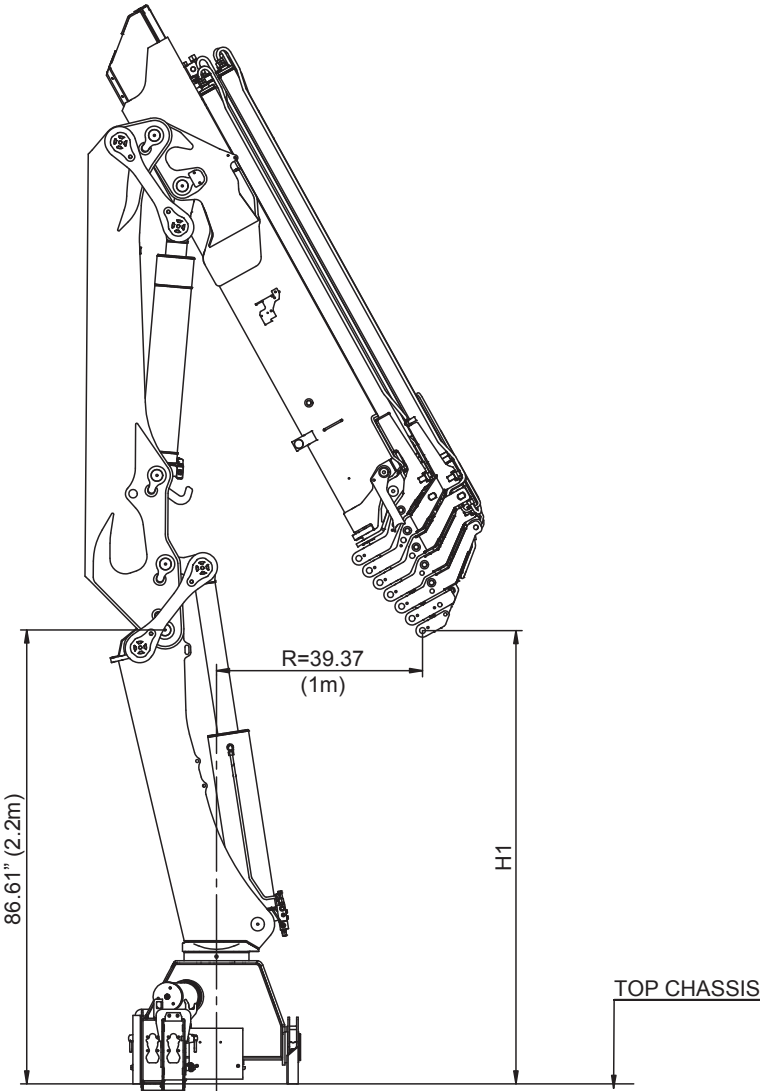


	H1	H1
K2	2.74m	107.87"
K3	2.65m	104.33"
K4	2.56m	100.79"
K5	2.47m	97.24"
K6	2.38m	93.70"
K7	2.29m	90.16"
K8	2.21m	87.01"


Fixed Stabilizer Legs

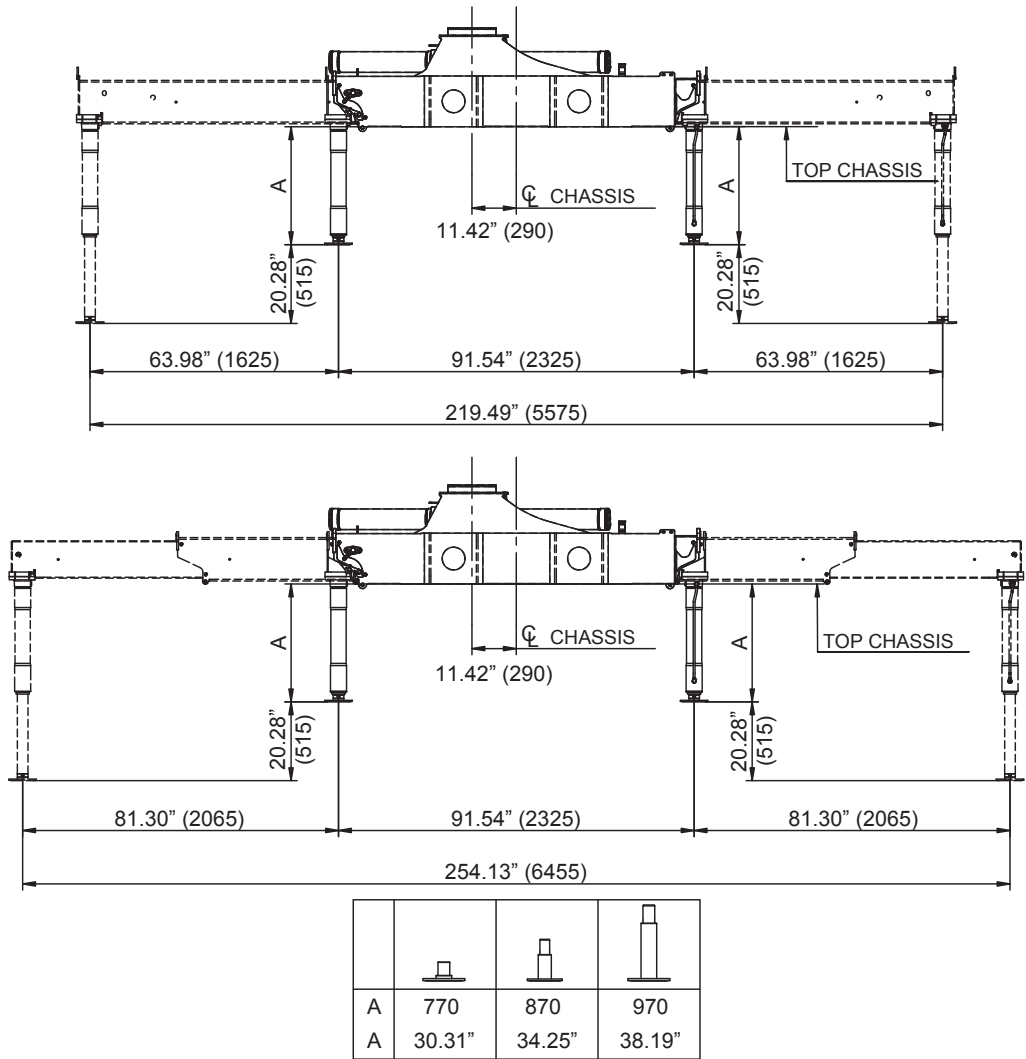



Støttebenscylinder, kort udførelse

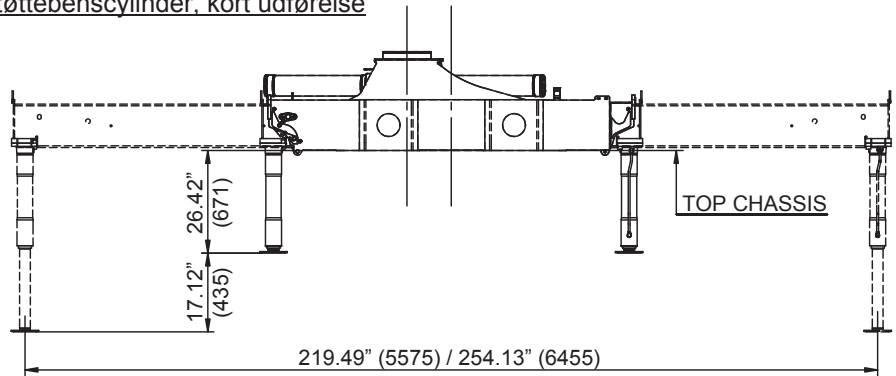


Fixed Stabilizer Legs

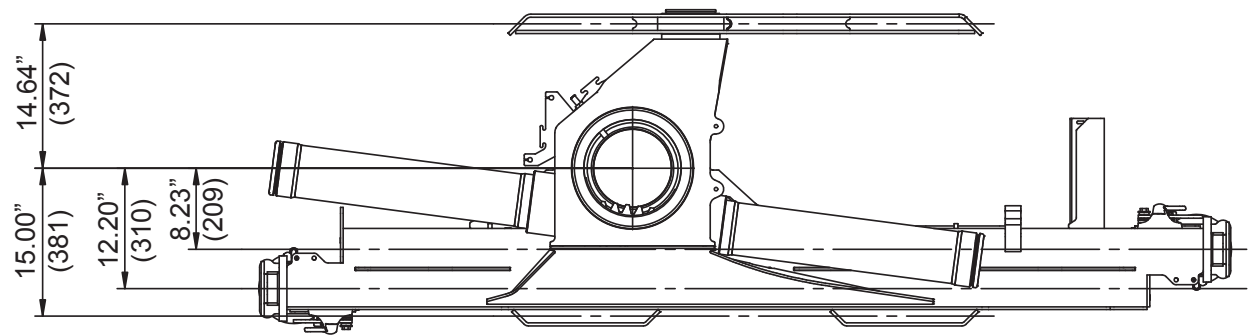


Swing-up Stabilizer Legs 20° - 60° (Manual)

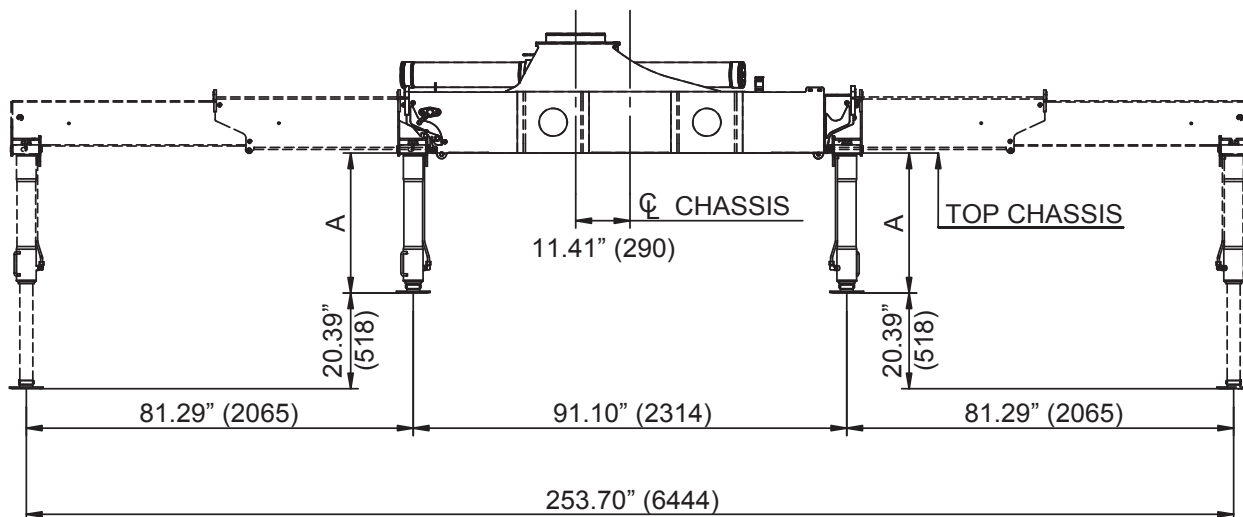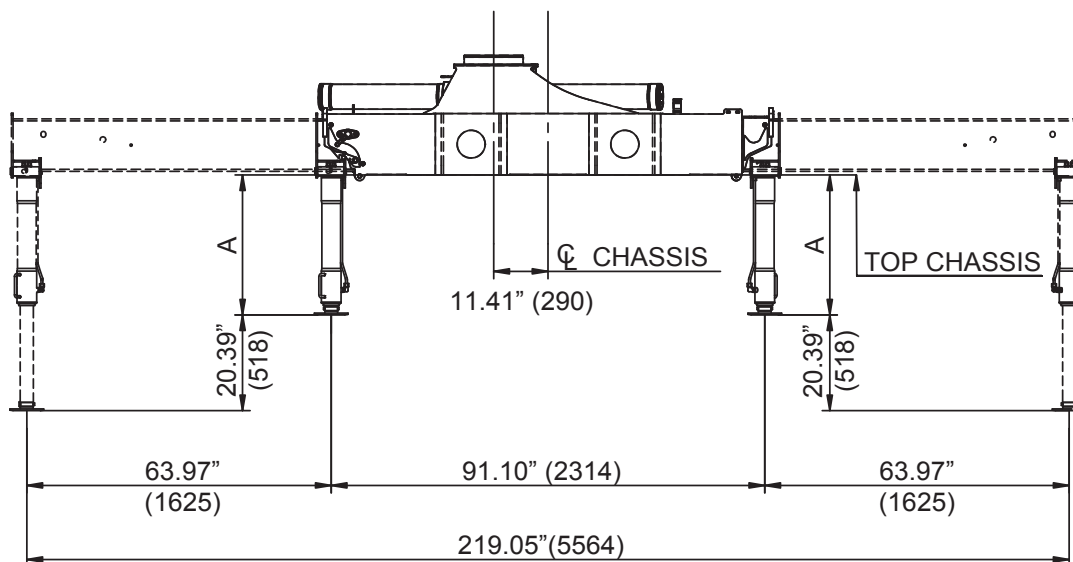


			
A Type R-60°	30.12" (765)	34.05" (865)	37.99" (965)
A Type R-20° (Obsolete)	29.80" (757)	33.74" (857)	37.68" (957)

Swing-up Stabilizer Legs 20° - 60° (Manual)

Type R-60°

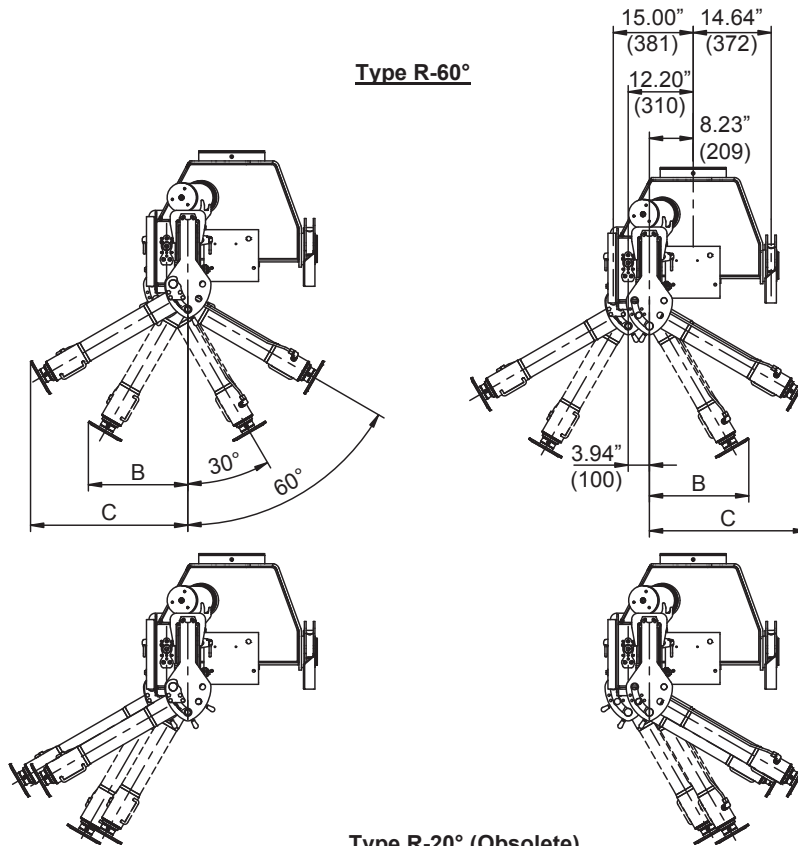


Type R-20° (Obsolete)

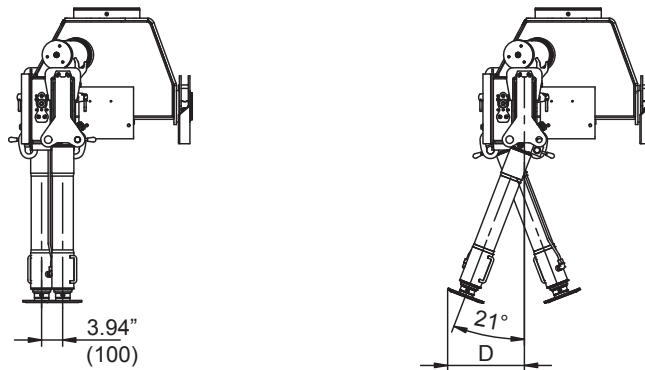


			
B	18.66" (474)	20.63" (524)	22.60" (574)
C	29.53" (750)	32.91" (836)	36.34" (923)
D	14.41" (366)	15.83" (402)	17.24" (438)


Swing-up Stabilizer Legs 180° (Manual + Hydraulic)

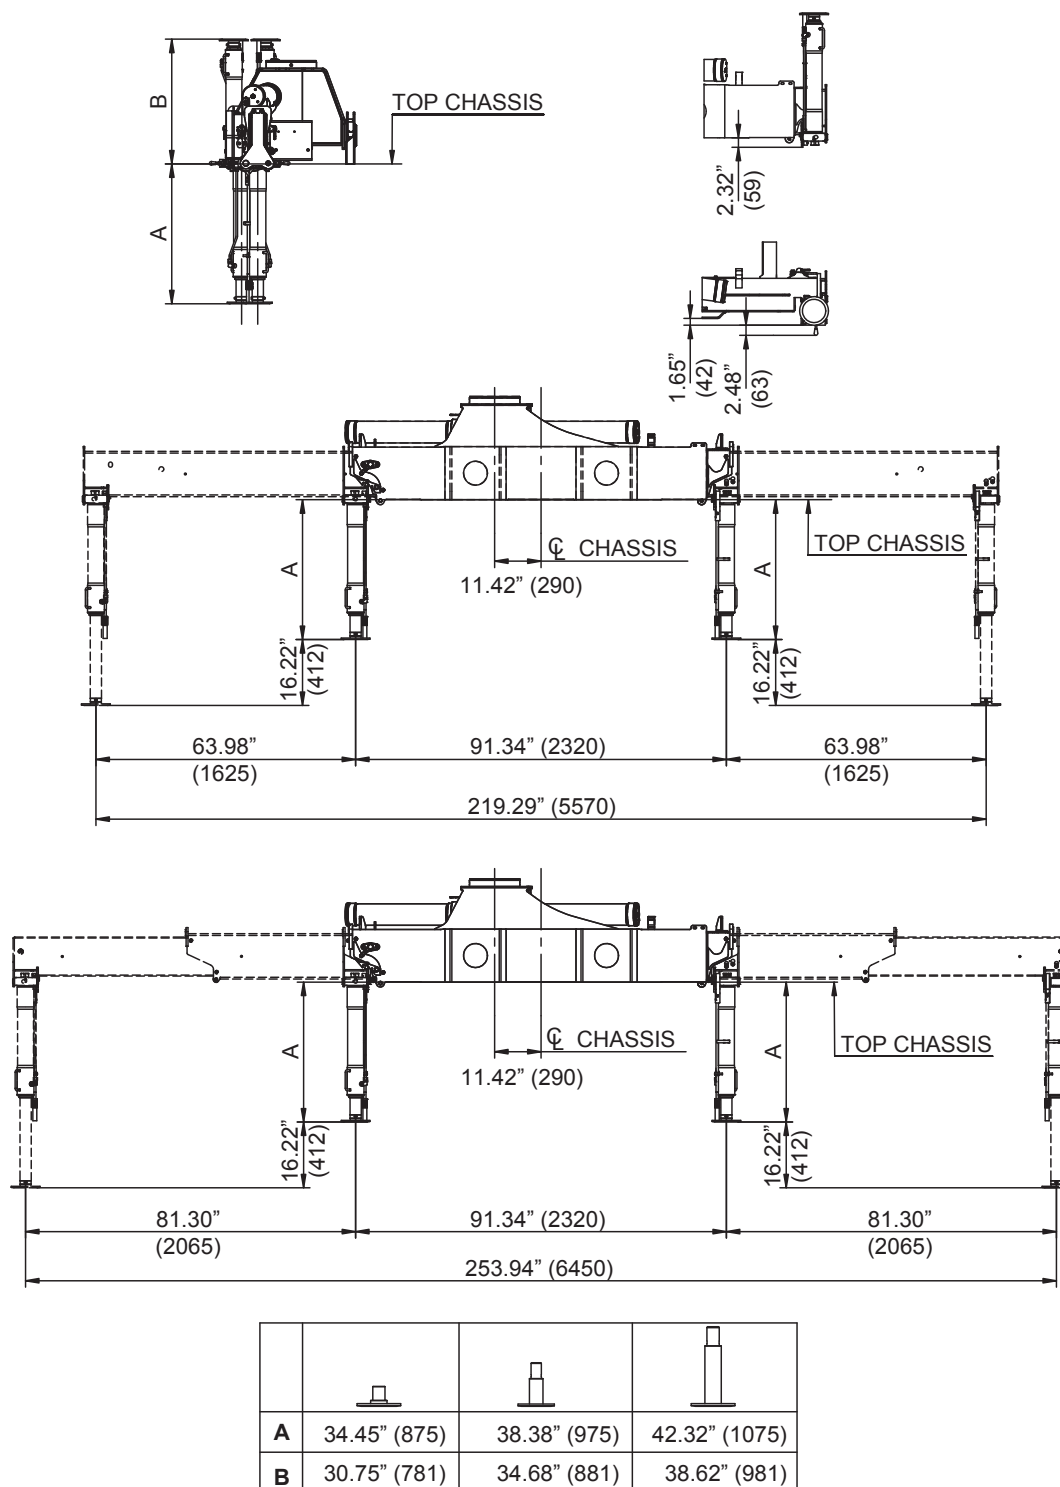


Swing-up Stabilizer Legs 180° (Manual + Hydraulic)

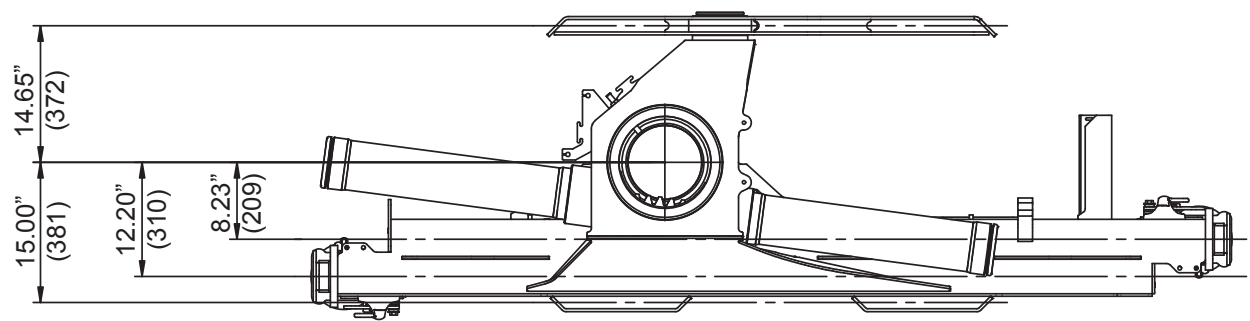


TS Top Seat (RC)

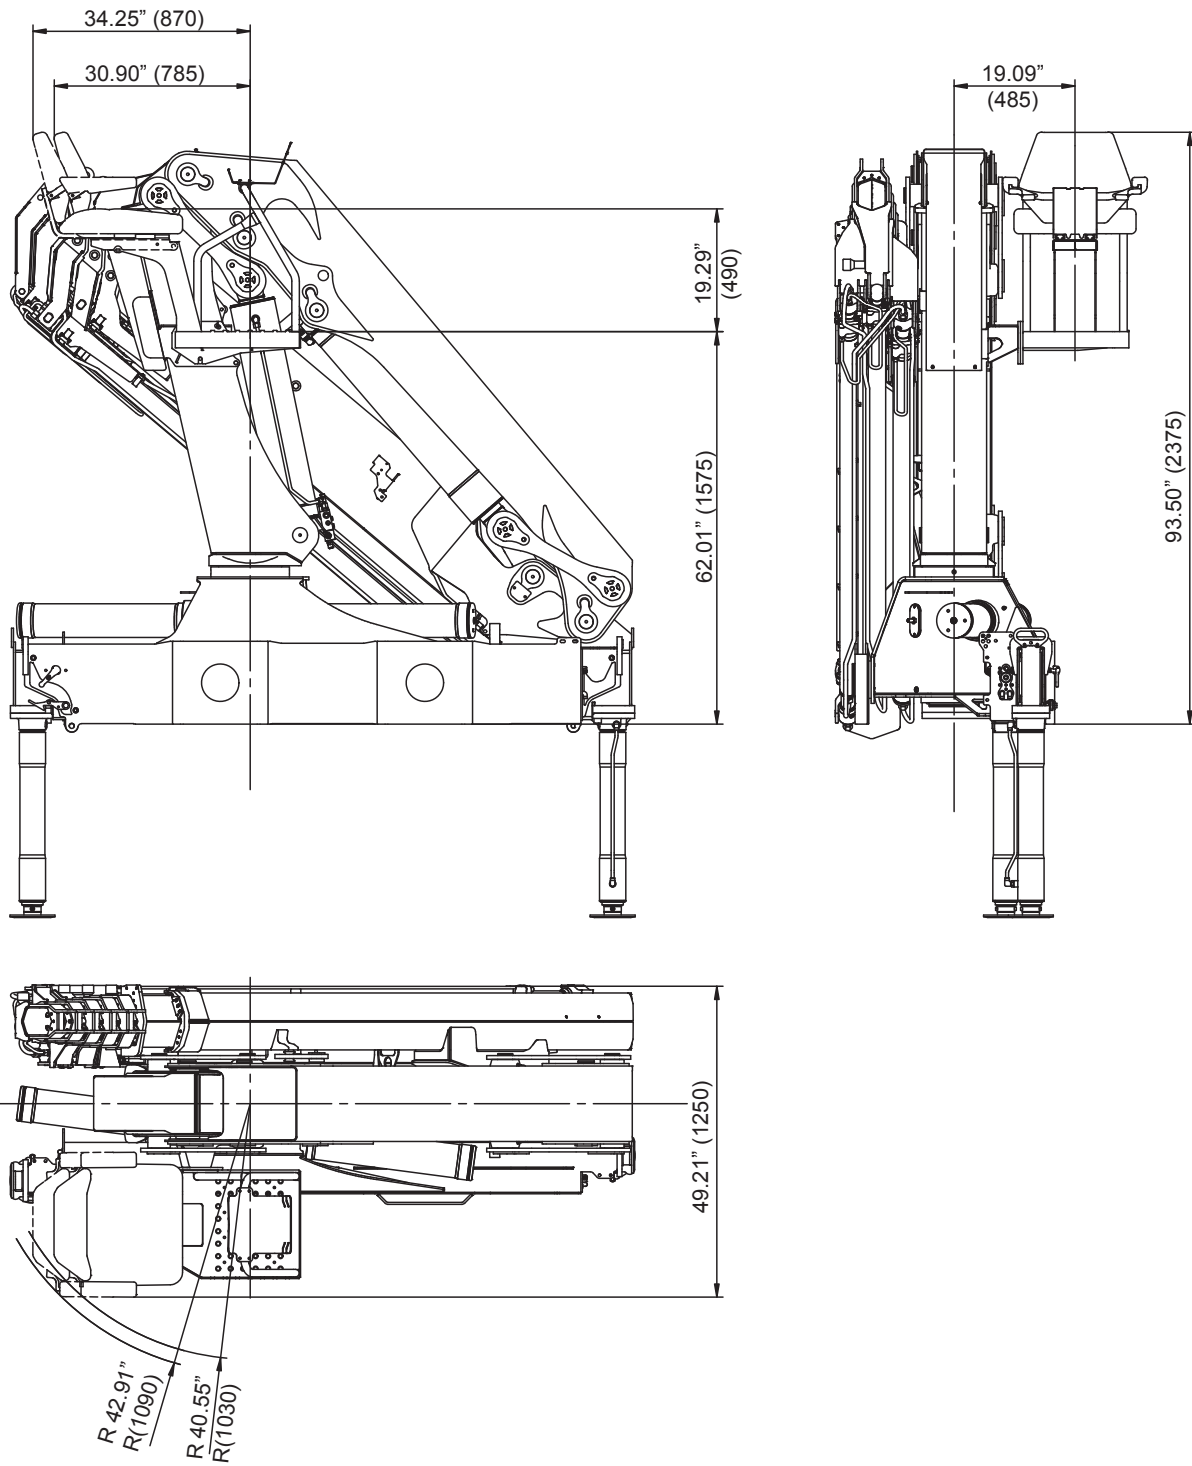


TS Top Seat (HC Linear)

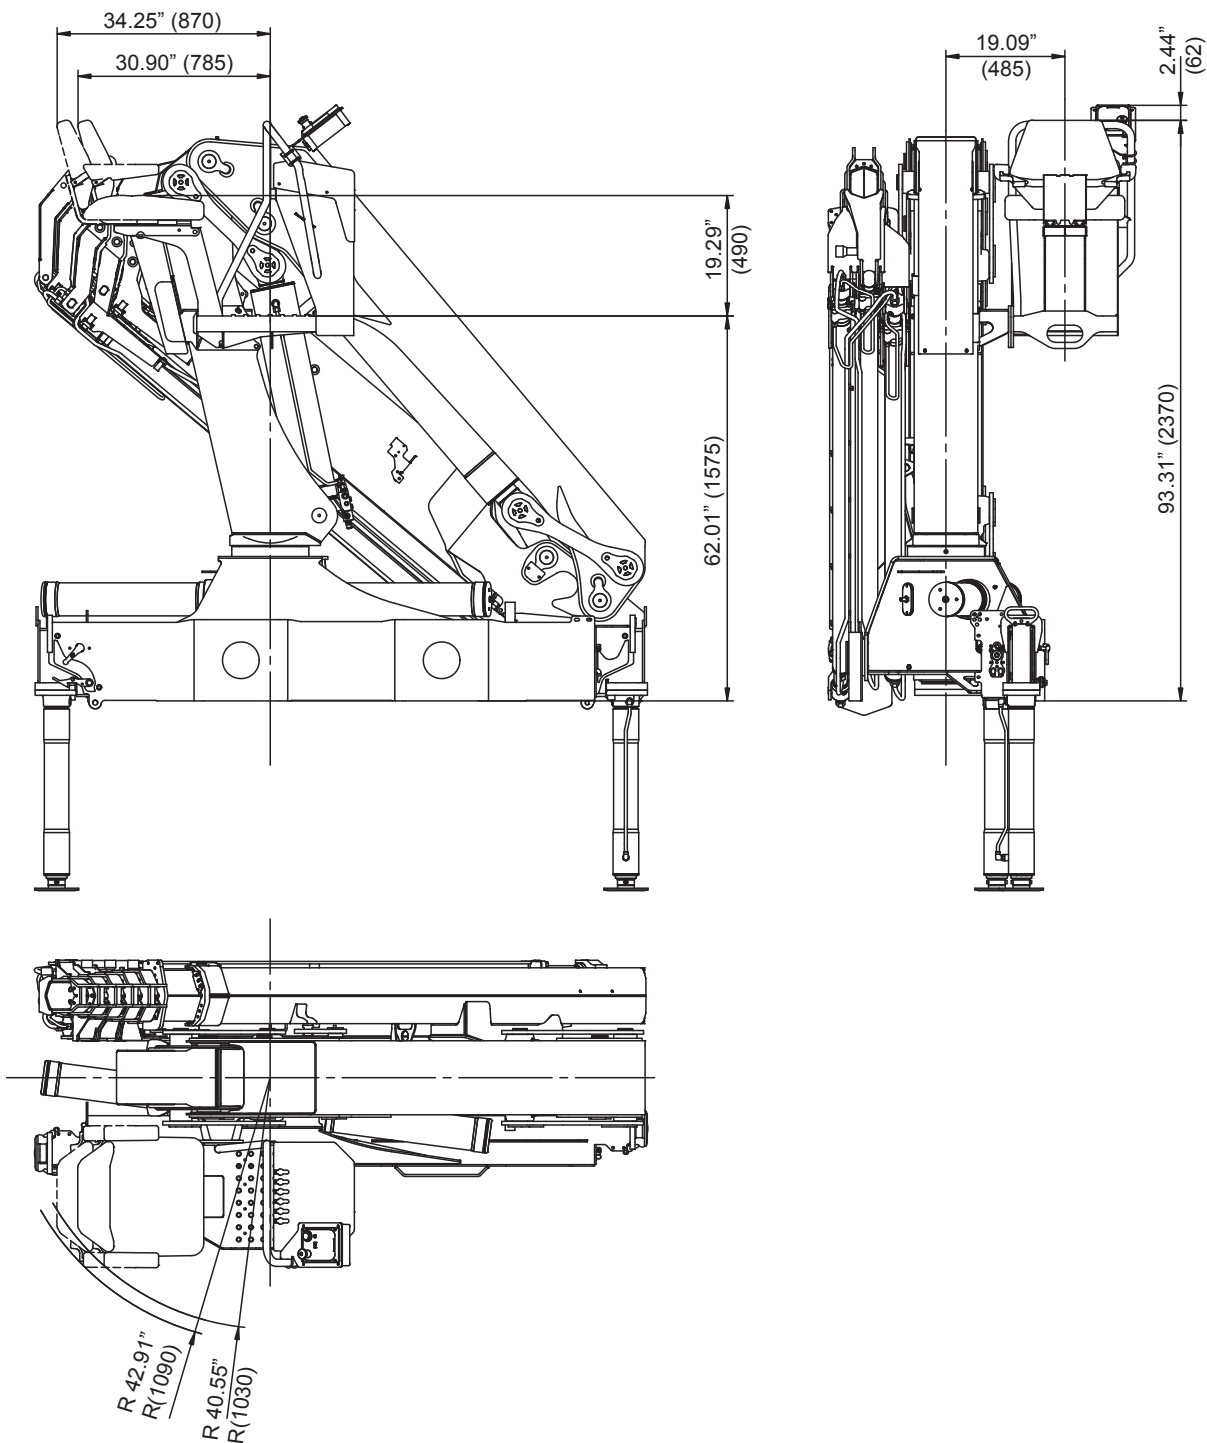


TS Top Seat (Danfoss X)

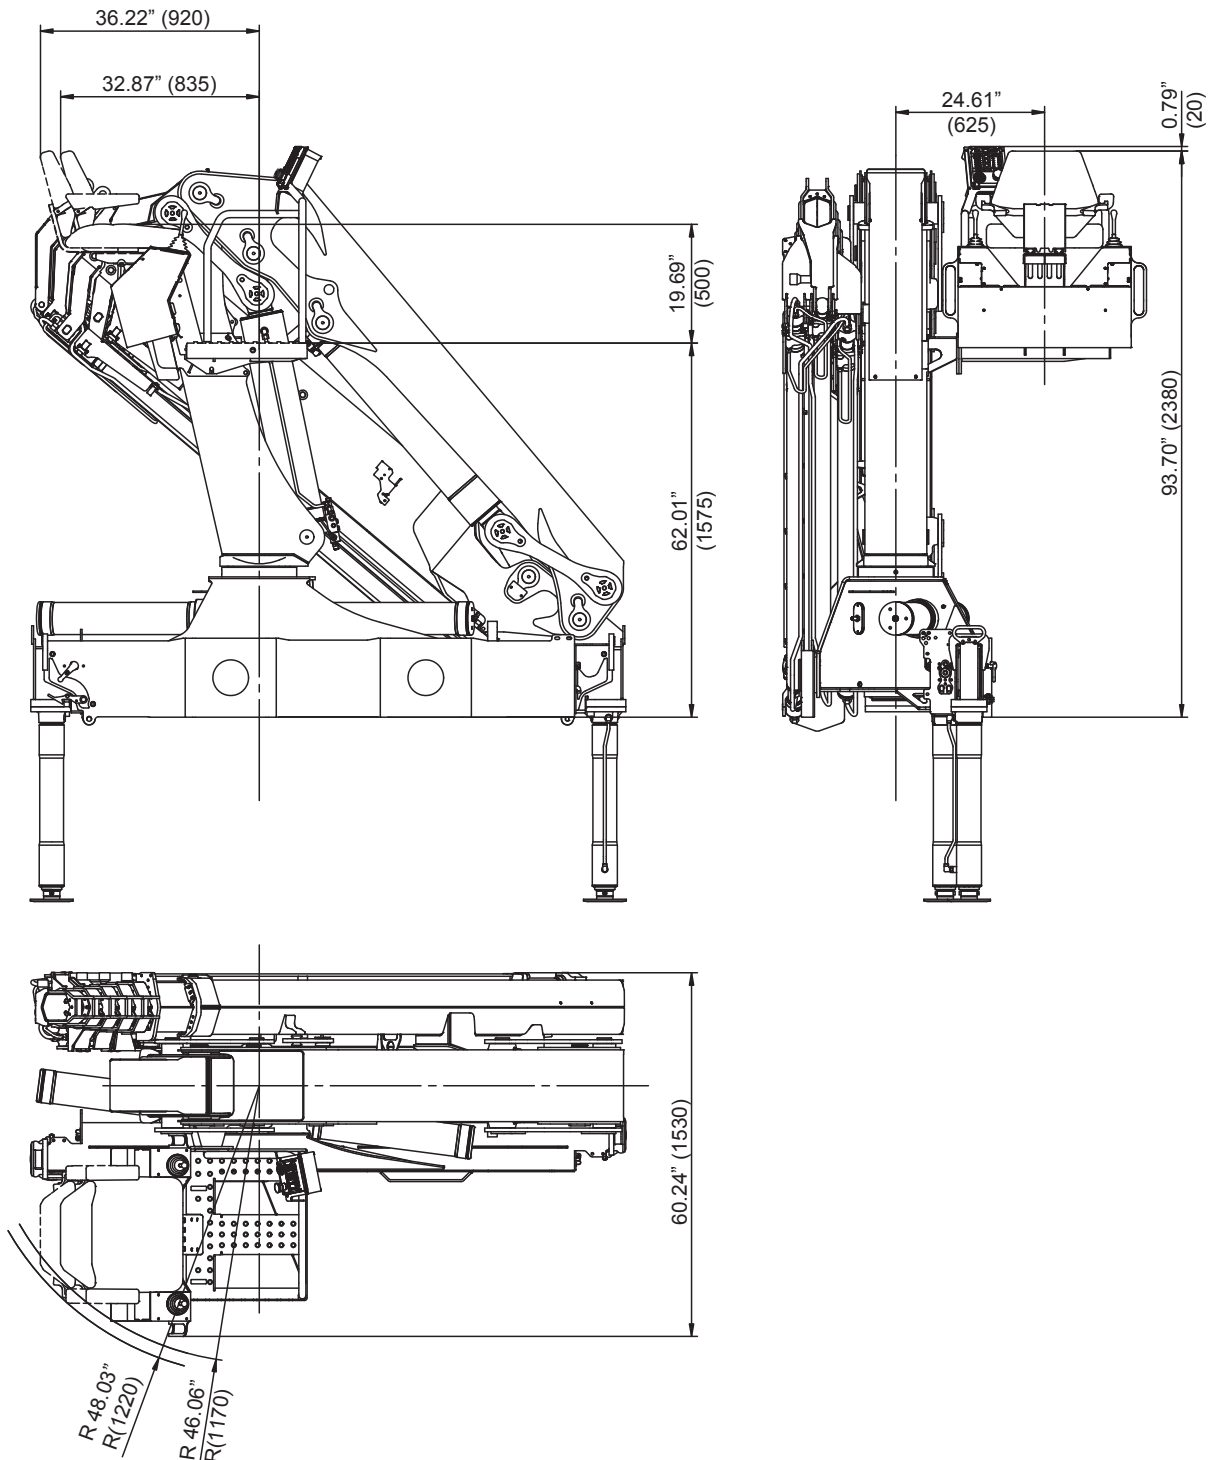

TS Top Seat (HC X)

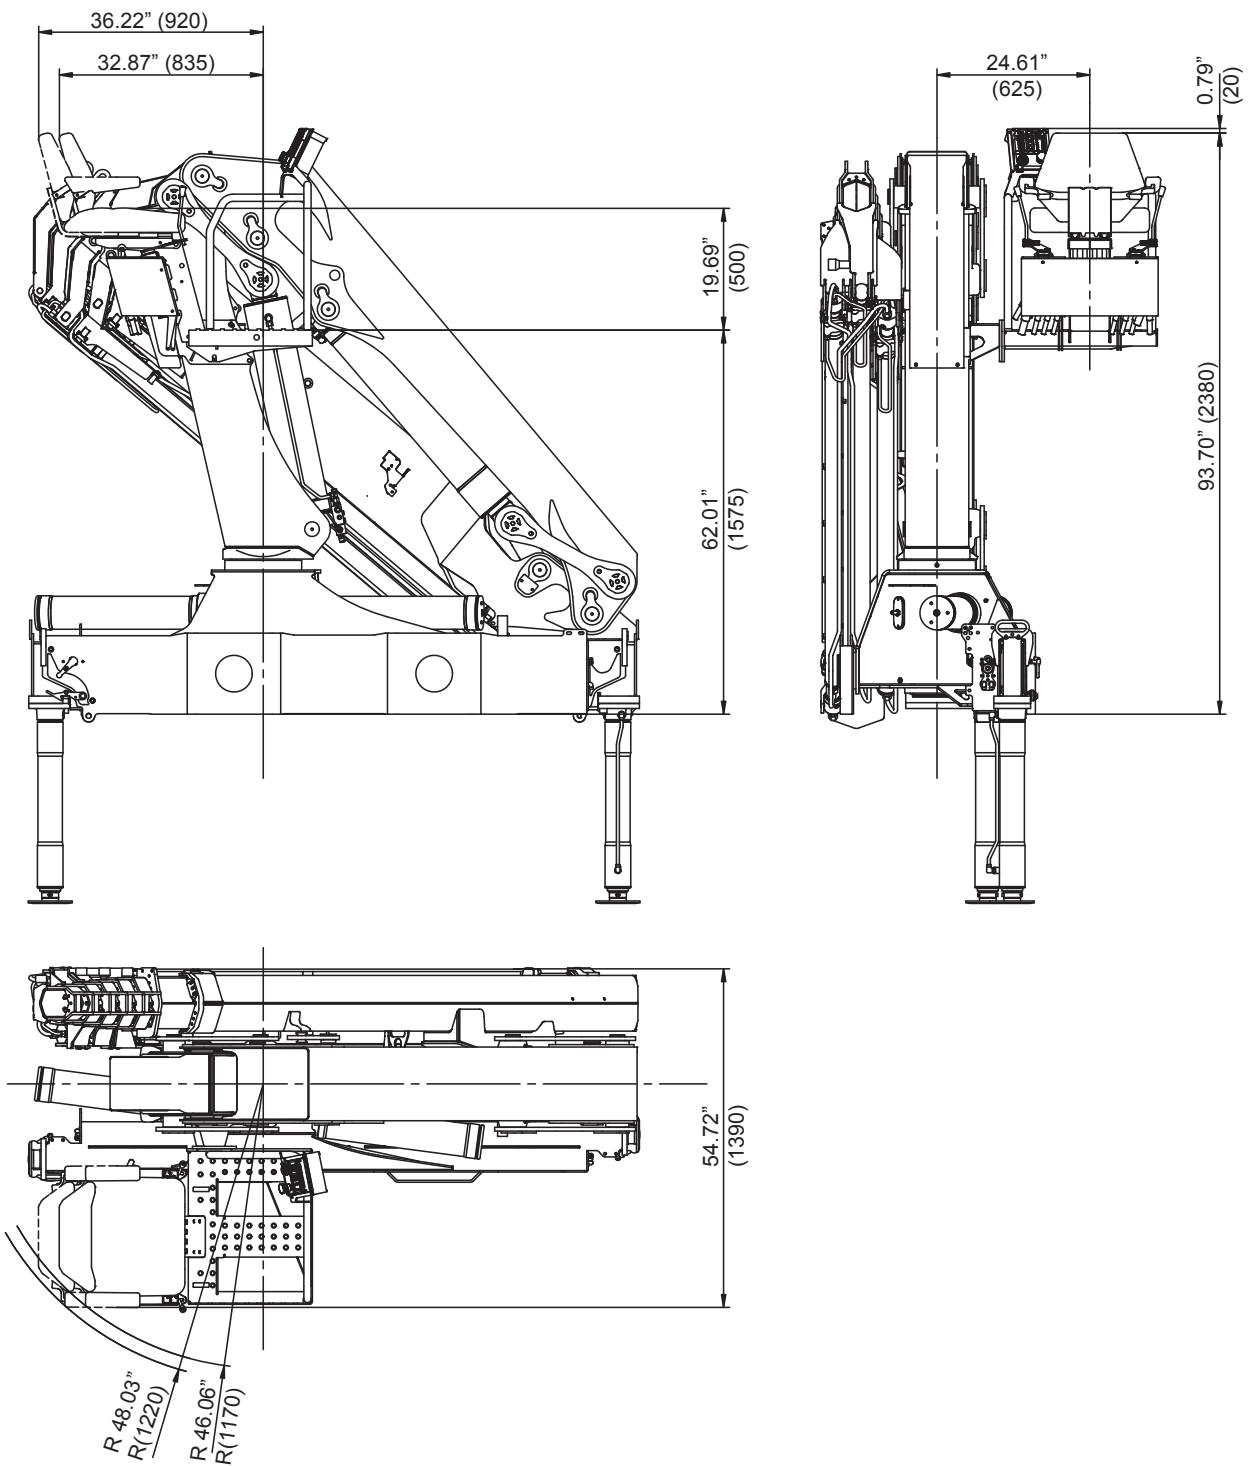

Ladder for TS

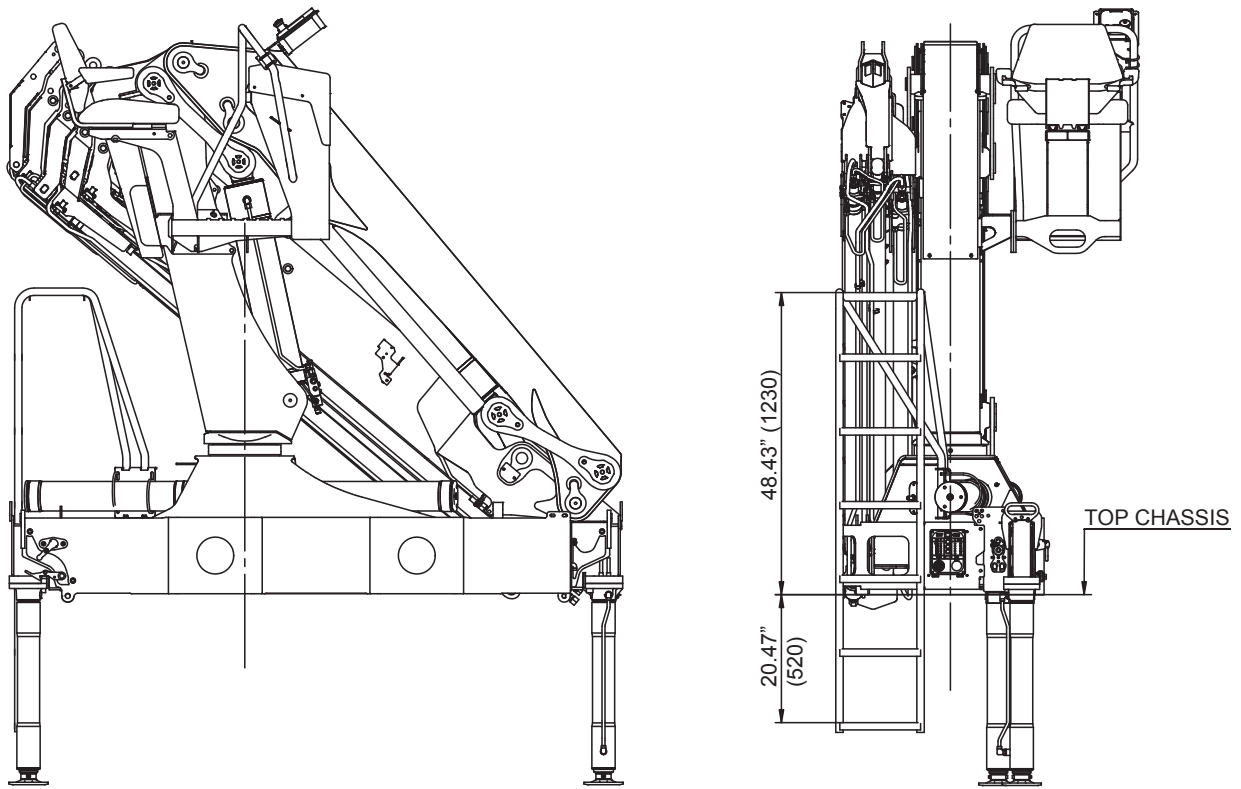

Notes:

- 1) Ladder cannot be used for TS RC
- 2) There is no access to the top seat when the loader is in stowing position





Winch

Performance (at 150 bar):	1.5T winch	1.65tn winch	2.5T winch	2.75tn winch
Max. wire pull – 1st layer	1500kg	3307lb	2500kg	5512lb
Max. wire pull – 2nd layer	1370kg	3020lb	2300kg	5071lb
Max. wire pull – 3rd layer	1260kg	2777lb	2100kg	4630lb
Max. wire pull – 4th layer	1170kg	2579lb	1950kg	4299lb


Wire speed (at 40 l/min.):	1.5T winch	1.65tn winch	2.5T winch	2.75tn winch
Max. wire speed – 1st layer	22 m/min	72 ft/min	24 m/min	79 ft/min
Max. wire speed – 2nd layer	24 m/min	79 ft/min	26 m/min	85 ft/min
Max. wire speed – 3rd layer	26 m/min	85 ft/min	28 m/min	92 ft/min
Max. wire speed – 4th layer	28 m/min	92 ft/min	30 m/min	98 ft/min

Weights:	1.5T winch	1.65tn winch	2.5T winch	2.75tn winch
Tare weight, winch (CE)	65kg	143lb	90kg	198lb
Fixed parts (valve section, brackets, hoses etc.)	50kg	110lb	50kg	110lb
Wire Ø10 x 50 m	30kg	66lb	30kg	66lb
Spare parts, single snatch block	30kg	66lb	30kg	66lb
Spare parts, double snatch block	40kg	88lb	40kg	88lb


Winch

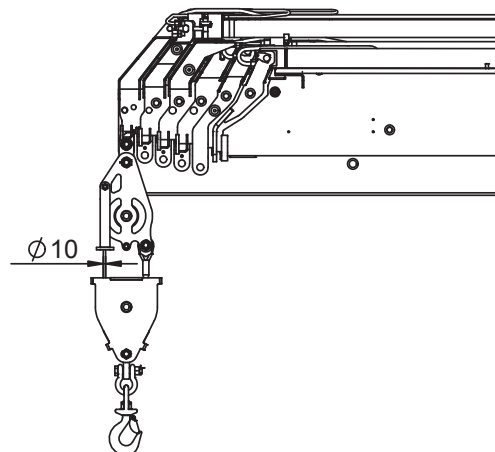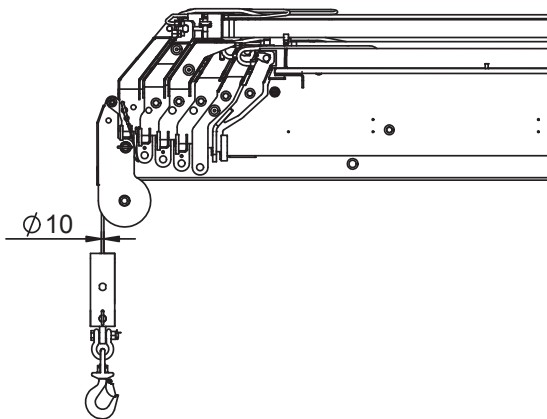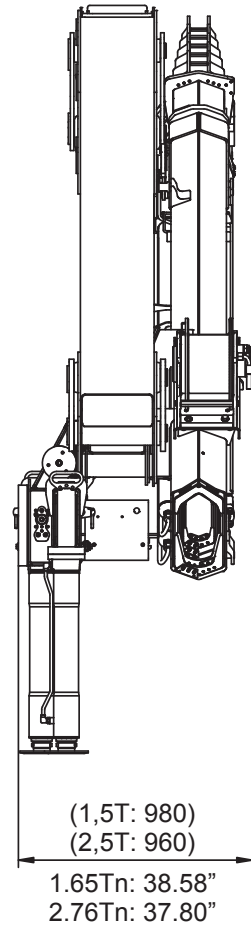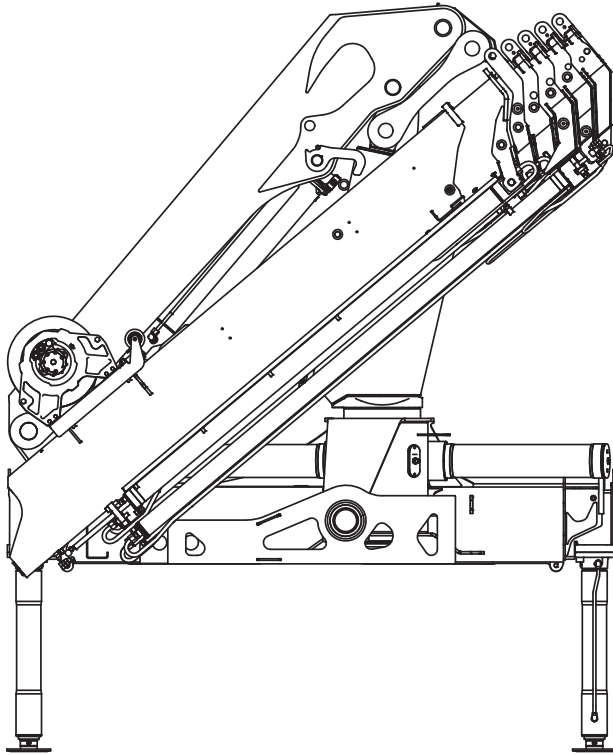




Stand-Up Platform (Std)

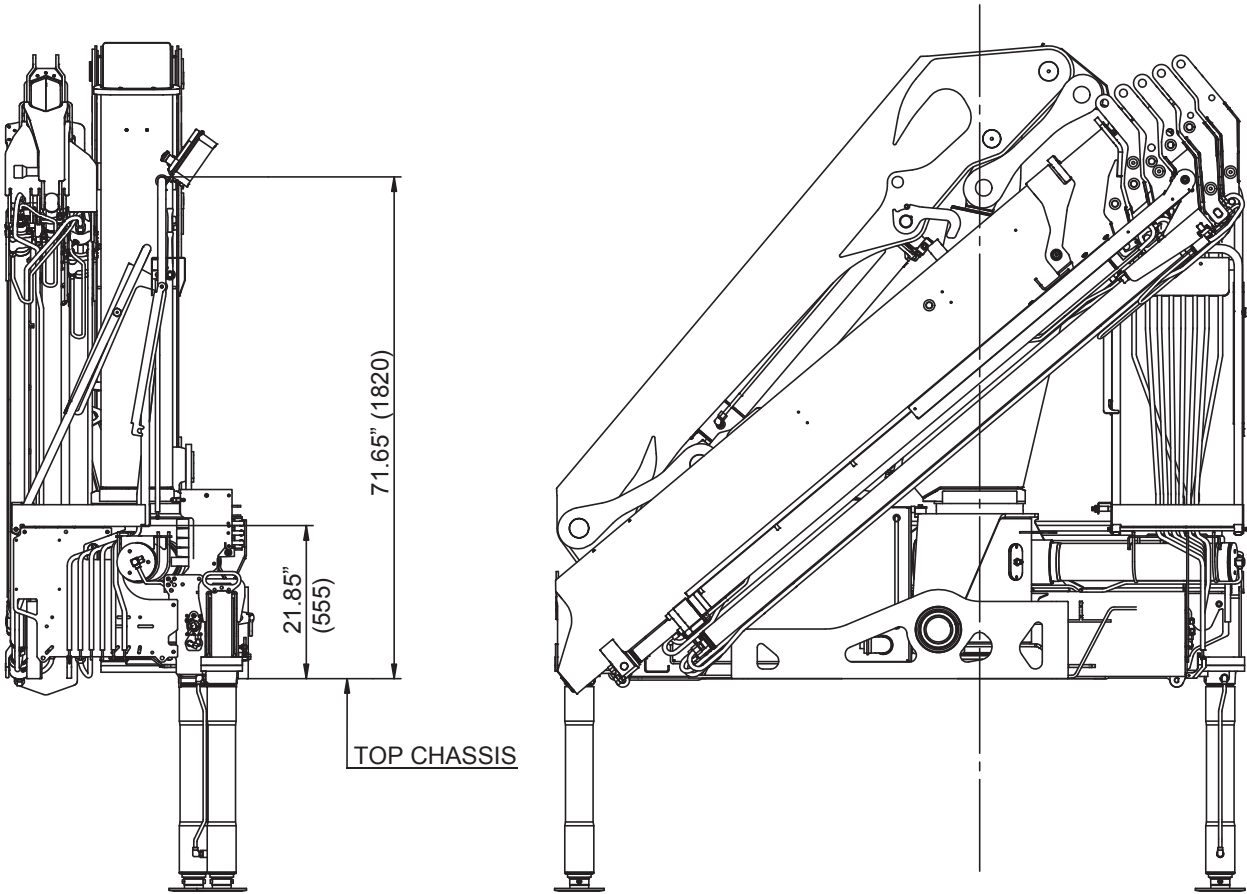



Stand-Up Platform (Valve Control)

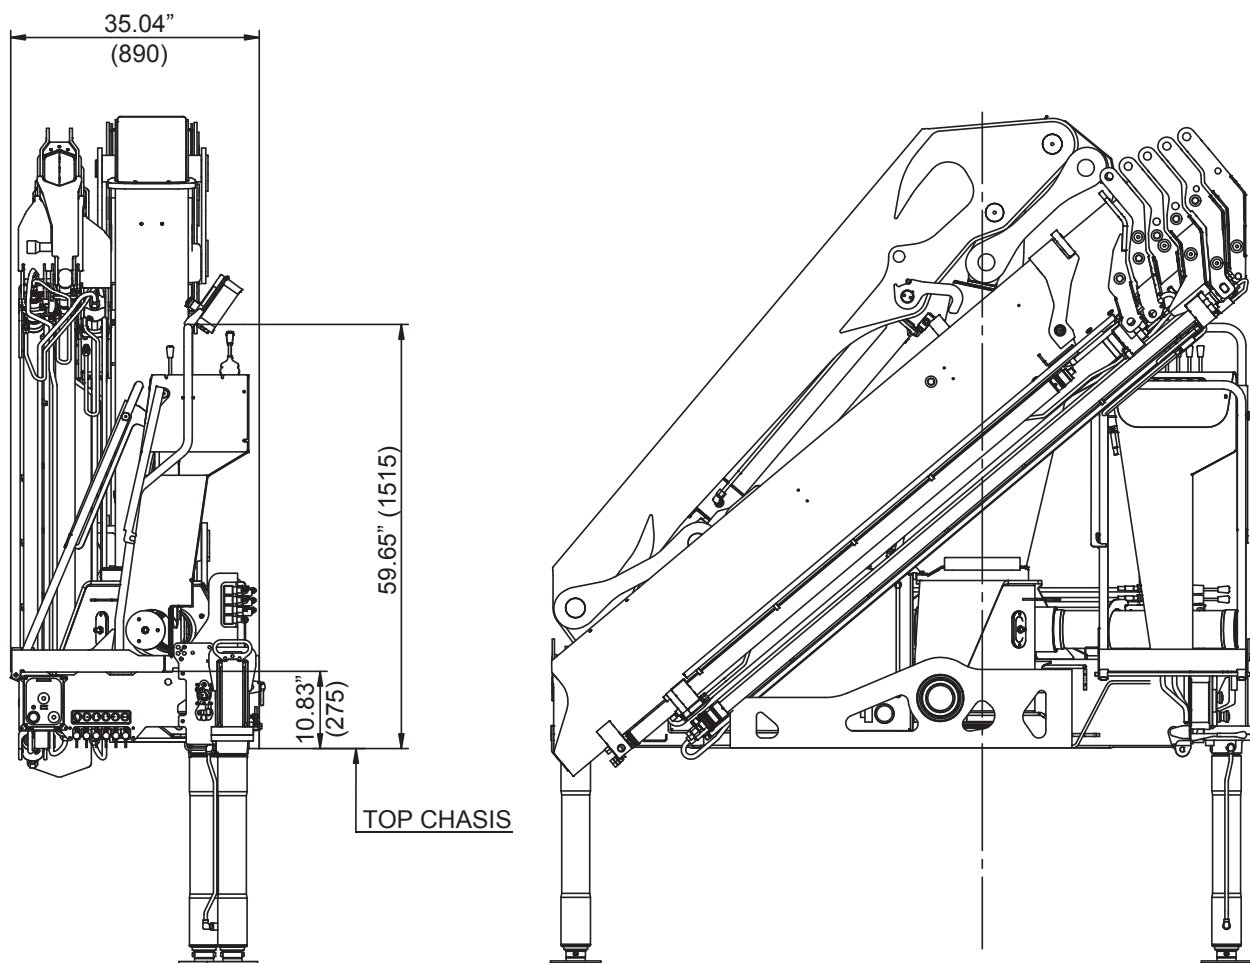



Internal Hose Routing K2-K6

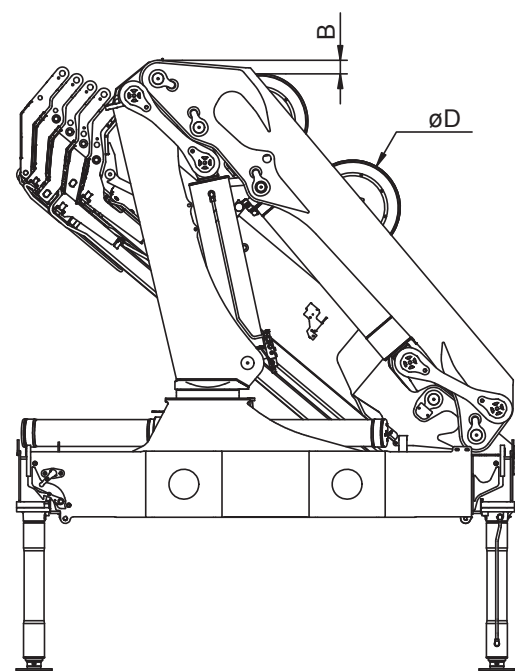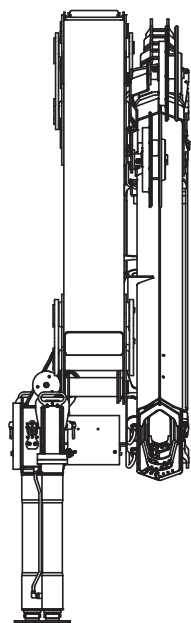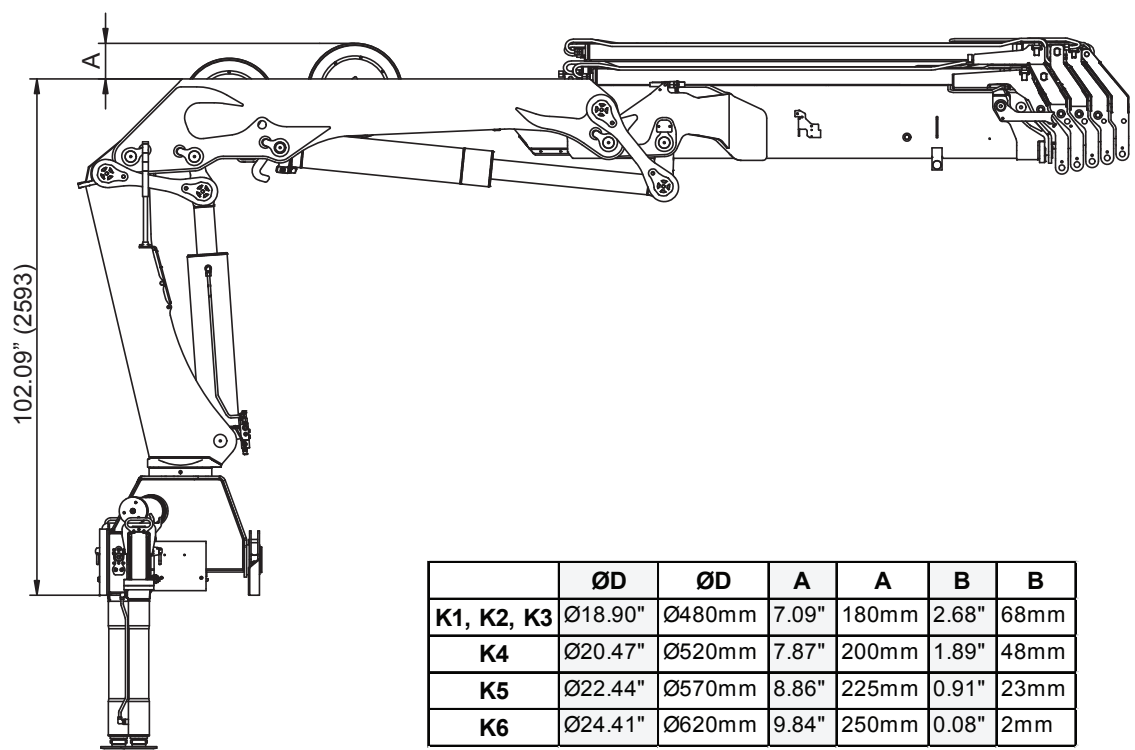


Extra Valves K7,K8

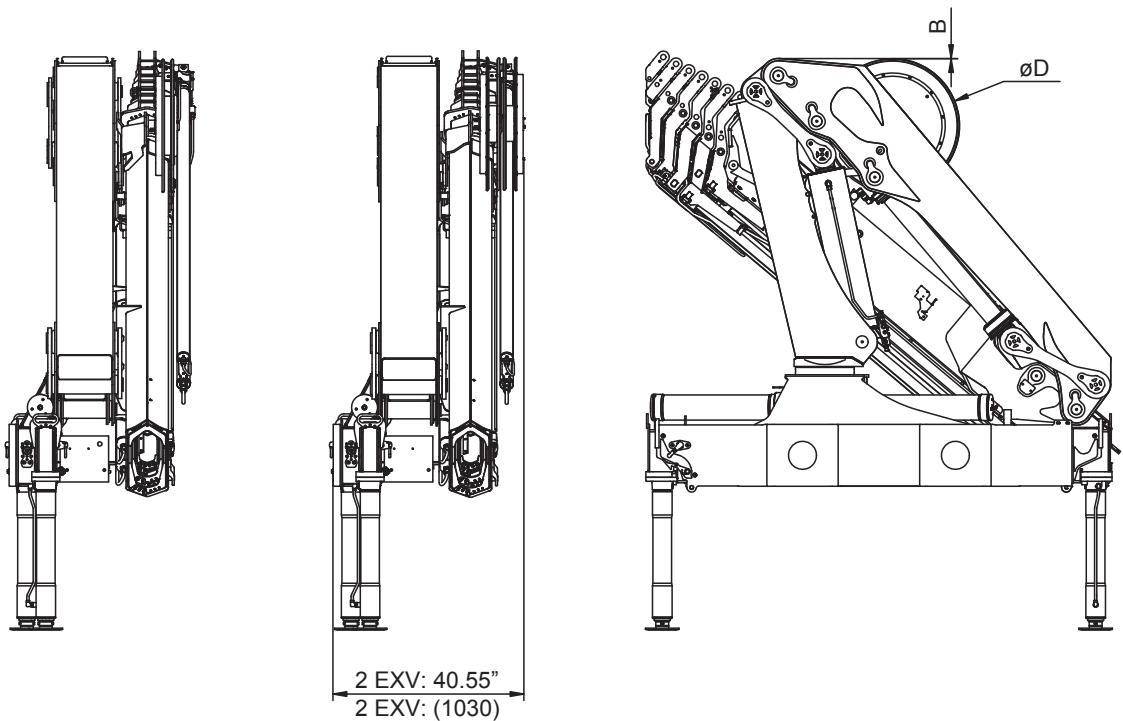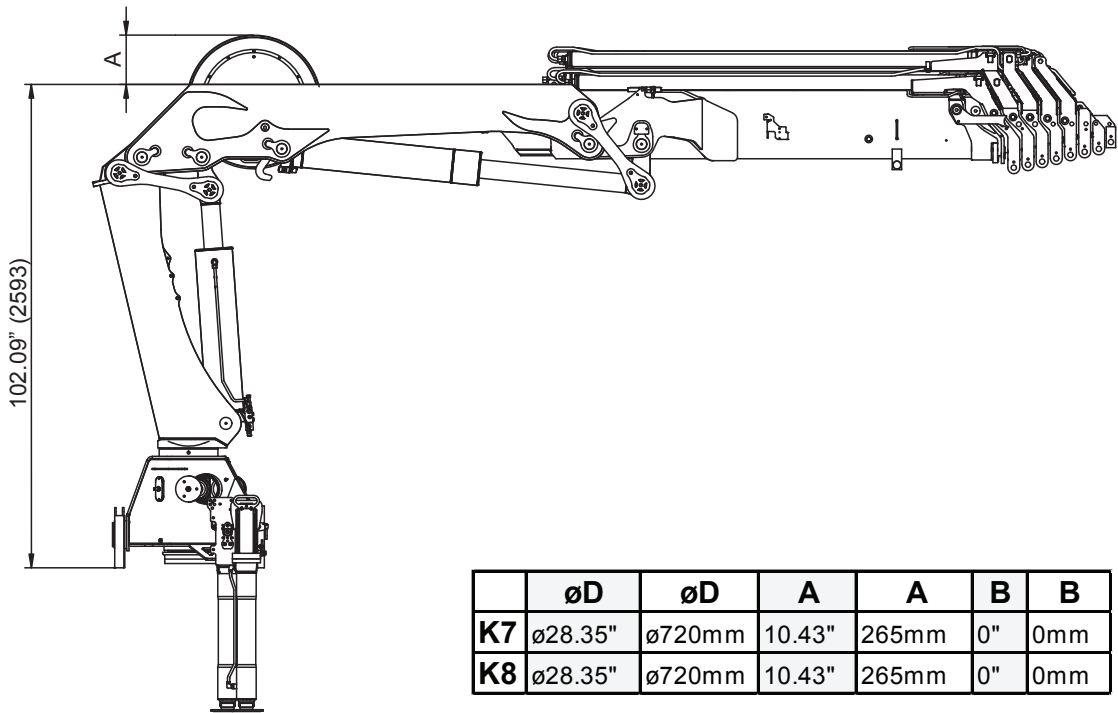

Stowed in Truck Body

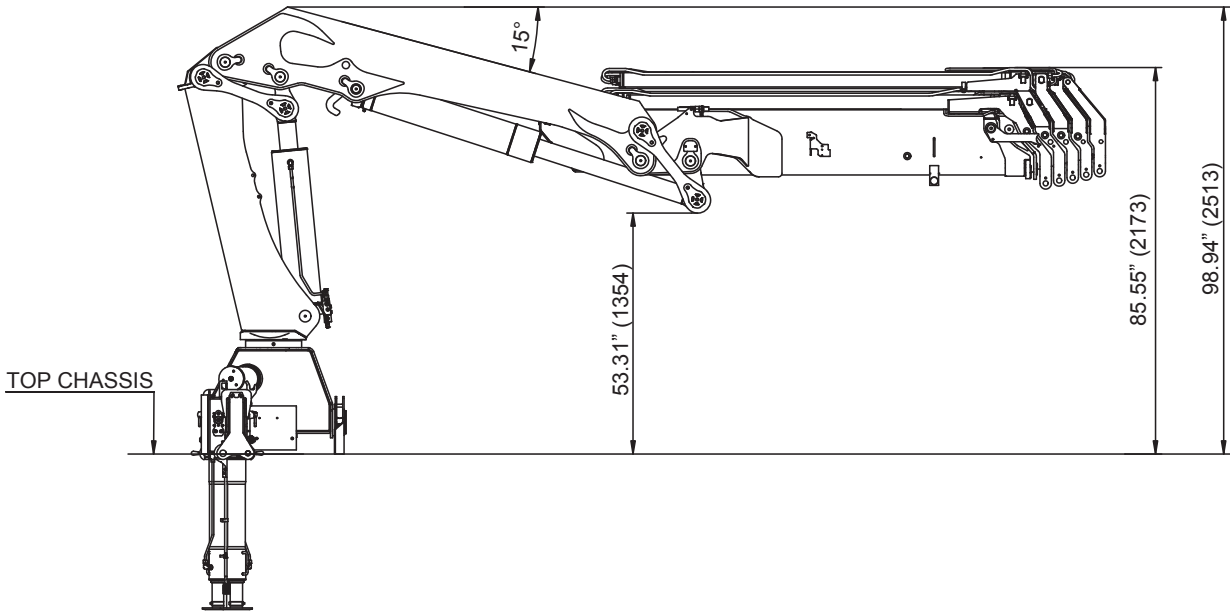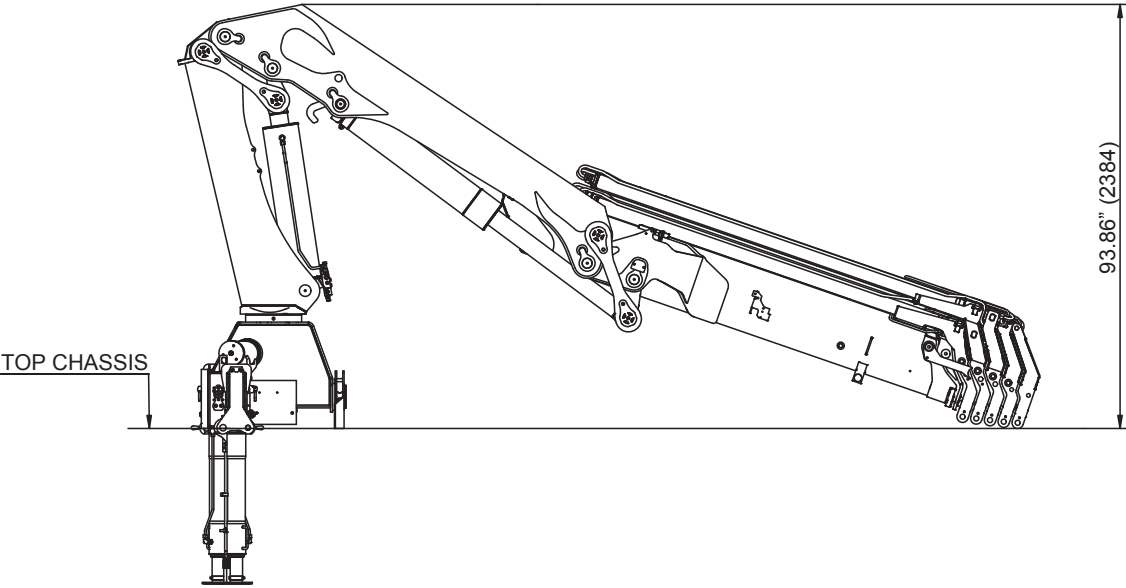

Centers of Gravity

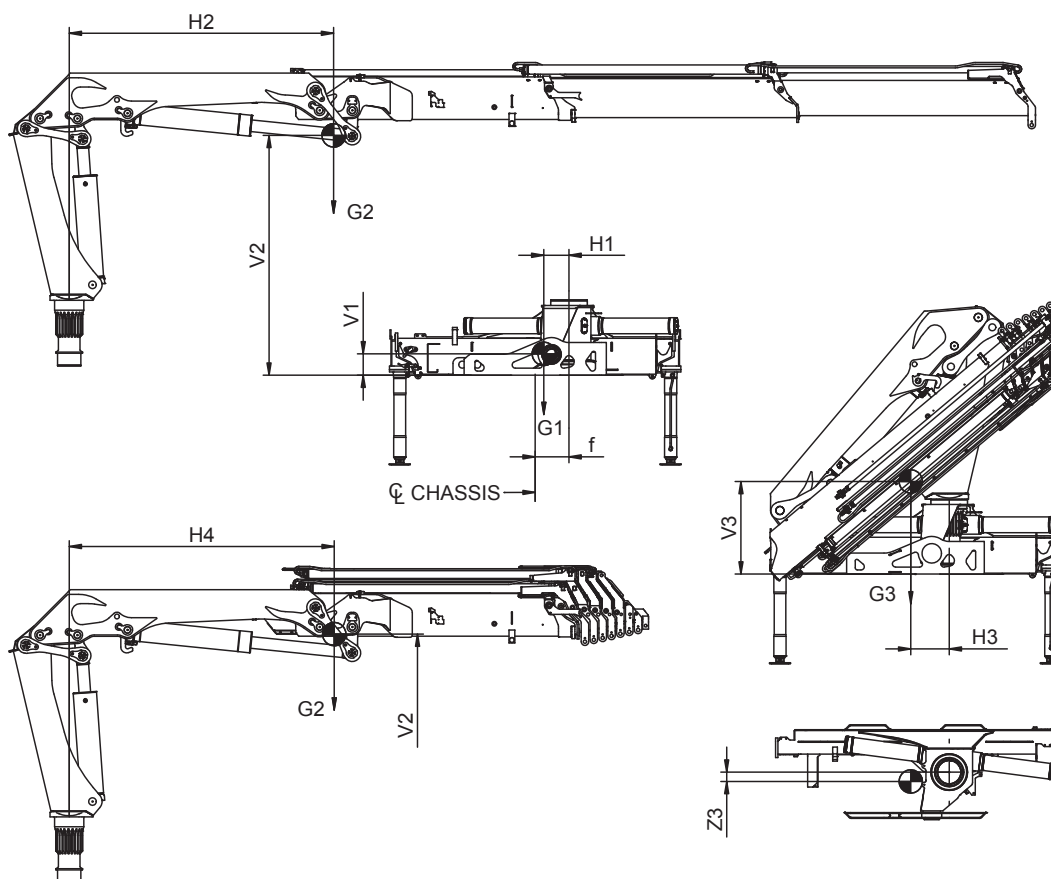

2200-K / 2420-K / 2620-K:

	mm									kg		
	V1	V2	V3	H1	H2	H3	H4	Z3	f	kg	G2	G3
K2	185	2065	795	145	2260	330	1600	20	290	870	1435	2305
K3	185	2105	820	145	2940	325	1770	35	290	870	1600	2470
K4	185	2140	840	145	3685	310	1930	55	290	870	1765	2635
K5	185	2165	855	145	4405	300	2030	70	290	870	1910	2780
K6	185	2185	870	145	5135	290	2125	85	290	870	2060	2930
K7	185	2195	890	145	5730	275	2200	95	290	870	2150	3020
K8	185	2210	905	145	6325	270	2270	105	290	870	2275	3145

	Inches									lb		
	V1	V2	V3	H1	H2	H3	H4	Z3	f	kg	G2	G3
K2	7.28	81.30	31.30	5.71	88.98	12.99	62.99	0.79	11.42	1918.02	3163.63	5081.66
K3	7.28	82.87	32.28	5.71	115.75	12.80	69.69	1.38	11.42	1918.02	3527.40	5445.42
K4	7.28	84.25	33.07	5.71	145.08	12.20	75.98	2.17	11.42	1918.02	3891.16	5809.18
K5	7.28	85.24	33.66	5.71	173.43	11.81	79.92	2.76	11.42	1918.02	4210.83	6128.85
K6	7.28	86.02	34.25	5.71	202.17	11.42	83.66	3.35	11.42	1918.02	4541.52	6459.54
K7	7.28	86.42	35.04	5.71	225.59	10.83	86.61	3.74	11.42	1918.02	4739.94	6657.96
K8	7.28	87.01	35.63	5.71	249.02	10.63	89.37	4.13	11.42	1918.02	5015.52	6933.54