
Manual # 99905931

22/153SL, 24/169SL, 26/180SL Technical Specifications

Revision Date: 03032015



IOWA MOLD TOOLING CO., INC.

PO Box 189

Garner, IA 50438

Tel: 641-923-3711 FAX: 641-923-2424

Website: <http://www.imt.com>

Copyright © 2009 Iowa Mold Tooling Co., Inc.
All rights reserved

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise without the prior written permission of Iowa Mold Tooling Co., Inc.

Iowa Mold Tooling Co., Inc. is an Oshkosh Corporation company.

Published on 03 March, 2015

Revisions	II
-----------------	----

Table of Contents

Chapter 1: Technical Data for 22/153DL	1
Chapter 2: Capacity Charts for 22/153DL	7
Chapter 3: Technical Data for 24/169DL	17
Chapter 4: Capacity Charts for 24/169DL	23
Chapter 5: Technical Data for 26/180DL	33
Chapter 6: Capacity Charts for 26/180DL	39
Chapter 7: Dimensional Drawings for 22/153DL, 24/169DL, 26/180DL	47

Revisions

[illegible]

CHAPTER 1

22/153SL Technical Specifications

In this Chapter

22/153SL Performance	2
22/153SL Dimensions	3
22/153SL Weights, Basic Loader	3
22/153SL Weights, Equipment	4
22/153SL Max. Load on Stabilizers (Per Stabilizer Cylinders)	4
22/153SL Power Consumption / Oil Capacity	5

22/153SL Dimensions

	22/153SL K2	22/153SL K3	22/153SL K4	22/153SL K5	22/153SL K6	22/153SL K7	22/153SL K8
Height above chassis	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	91.93" (2335 mm)
Width	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)
Length, no extra valves	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	39.17" (995 mm)	39.17" (995 mm)
Length, with extra valves (hose guides)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)		
Length, with 1 extra valve (hose reels)						39.17" (995 mm)	39.17" (995 mm)
Length, with 2 extra valves (hose reels)						40.55" (1030 mm)	40.55" (1030 mm)
Length, with extra valves (int. hose routing)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)		
Stabilizer spread, S1 (standard)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)
Stabilizer spread, D	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)

22/153SL Weights, Basic Loader

	22/153SL K2	22/153SL K3	22/153SL K4	22/153SL K5	22/153SL K6	22/153SL K7	22/153SL K8
Standard loader 1), excl. Stabilizers	4178 lb (1895 kg)	4553 lb (2065 kg)	4994 lb (2265 kg)	5324 lb (2415 kg)	5633 lb (2555 kg)	5864 lb (2660 kg)	6052 lb (2745 kg)
Stabilizers, S1 fixed	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)
Stabilizers, S1 swing-up	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)
Stabilizers, S1 hydr. swing-up	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)
Stabilizers, D fixed	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)
Stabilizers, D swing-up	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)
Stabilizers, D hydr. swing-up	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)
Mounting kit, 4 bolts	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)
Mounting kit, 8 bolts	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)
Tank, excl. oil (fitted on loader)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)z
Manual extensions			176 lb (80 kg)	154 lb (70 kg)	132 lb (60 kg)	88 lb (45 kg)	77 lb (35 kg)
			154 lb (70 kg)	132 lb (60 kg)	88 lb (45 kg)	77 lb (35 kg)	
			132 lb (60 kg)	88 lb (45 kg)	77 lb (35 kg)		
Oil in loader (stowing position)	88 lb (40 kg)	88 lb (45 kg)	110 lb (50 kg)	121 lb (55 kg)	132 lb (60 kg)	143 kg (65 kg)	154 lb (70 kg)

1) Weights $\pm$ 5% because of tolerances for plate thickness

22/153SL Weights, Equipment

[illegible]

22/153SL Max. Load on Stabilizers (Per Stabilizer Cylinder)

[illegible]

22/153SL Power Consumption / Oil Capacity

	22/153SL K2	22/153SL K3	22/153SL K4	22/153SL K5	22/153SL K6	22/153SL K7	22/153SL K8
Working pressure	4351 PSI (300 Bar)	4351 PSI (300 Bar)	4351 PSI (300 Bar)	4351 PSI (300 Bar)	4351 PSI (300 Bar)	4351 PSI (300 Bar)	4351 PSI (300 Bar)
Tank capacity (fitted on loader)	23.78 Gallons (90 L)	23.78 Gallons (90 L)	23.78 Gallons (90 L)	23.78 Gallons (90 L)	23.78 Gallons (90 L)	23.78 Gallons (90 L)	23.78 Gallons (90 L)
Max. pump performance, Hydrocontrol, 1-circuit	15.85 Gallon/min (60 L/min)	15.85 Gallon/min (60 L/min)	15.85 Gallon/min (60 L/min)	15.85 Gallon/min (60 L/min)	15.85 Gallon/min (60 L/min)	15.85 Gallon/min (60 L/min)	15.85 Gallon/min (60 L/min)
Max. pump performance, Hydrocontrol, 2-circuit	2x13.2 Gallons/ min (2x50 L/min)	2x13.2 Gallons/ min (2x50 L/min)	2x13.2 Gallons/ min (2x50 L/min)	2x13.2 Gallons/ min (2x50 L/min)	2x13.2 Gallons/ min (2x50 L/min)	2x13.2 Gallons/ min (2x50 L/min)	2x13.2 Gallons/ min (2x50 L/ min)z
Max. pump performance, Danfoss fixed flow	-	-	-	-	-	-	-
Max. pump performance, Danfoss variable	-	-	-	-	-	-	-

This Page Left Blank Intentionally


CHAPTER 2

22/153SL Capacity Charts


In this Chapter

22/153SL Capacity Chart K2	8
22/153SL Capacity Chart K3	9
22/153SL Capacity Chart K4	10
22/153SL Capacity Chart K5	11
22/153SL Capacity Chart K6	12
22/153SL Capacity Chart K7	13
22/153SL Capacity Chart K8	14
22/153SL Capacity Chart K2-K8	15


22/153SL K2 Capacity Chart

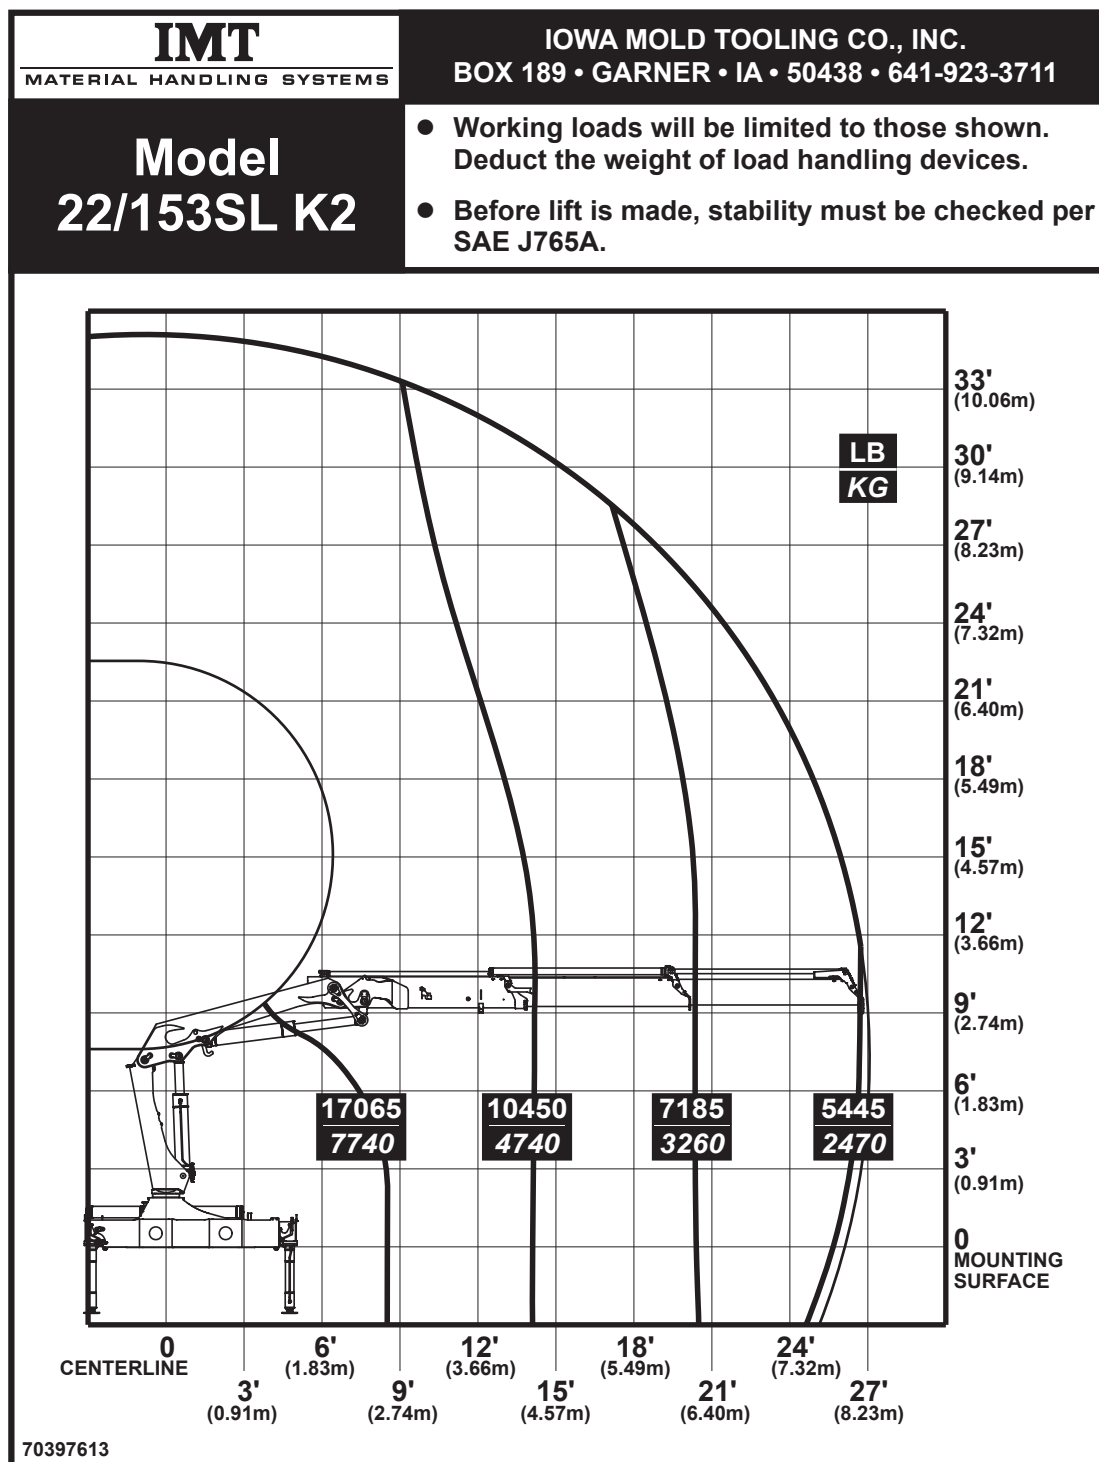


22/153SL K3 Capacity Chart

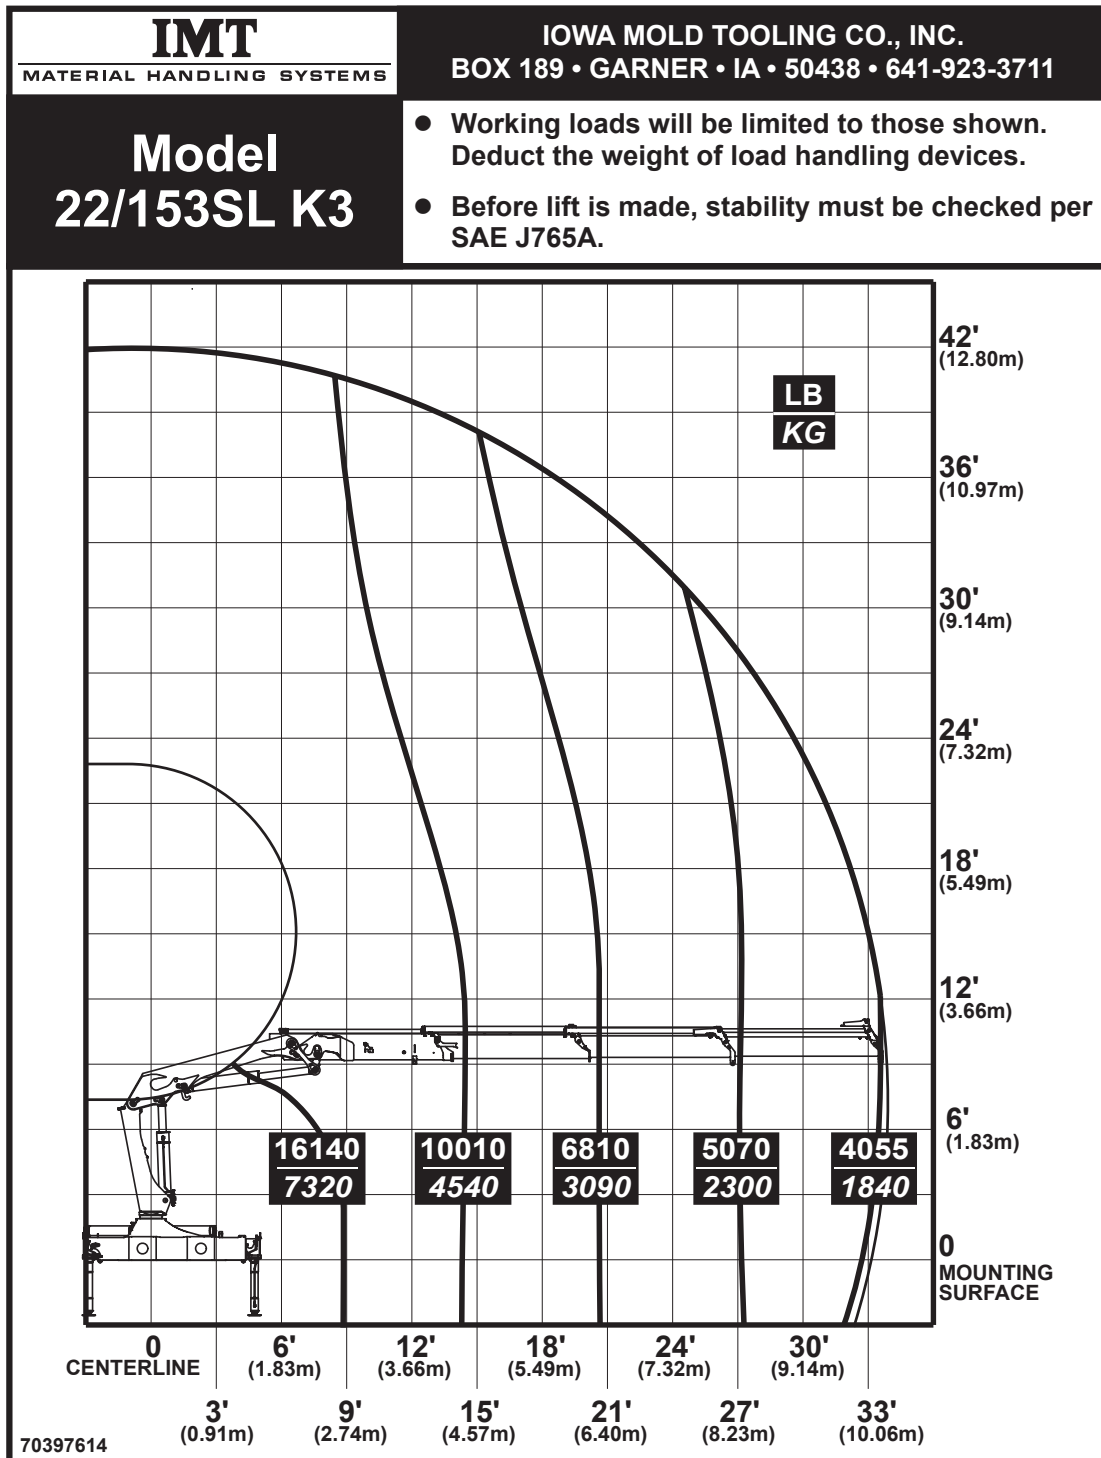


22/153SL K4 Capacity Chart

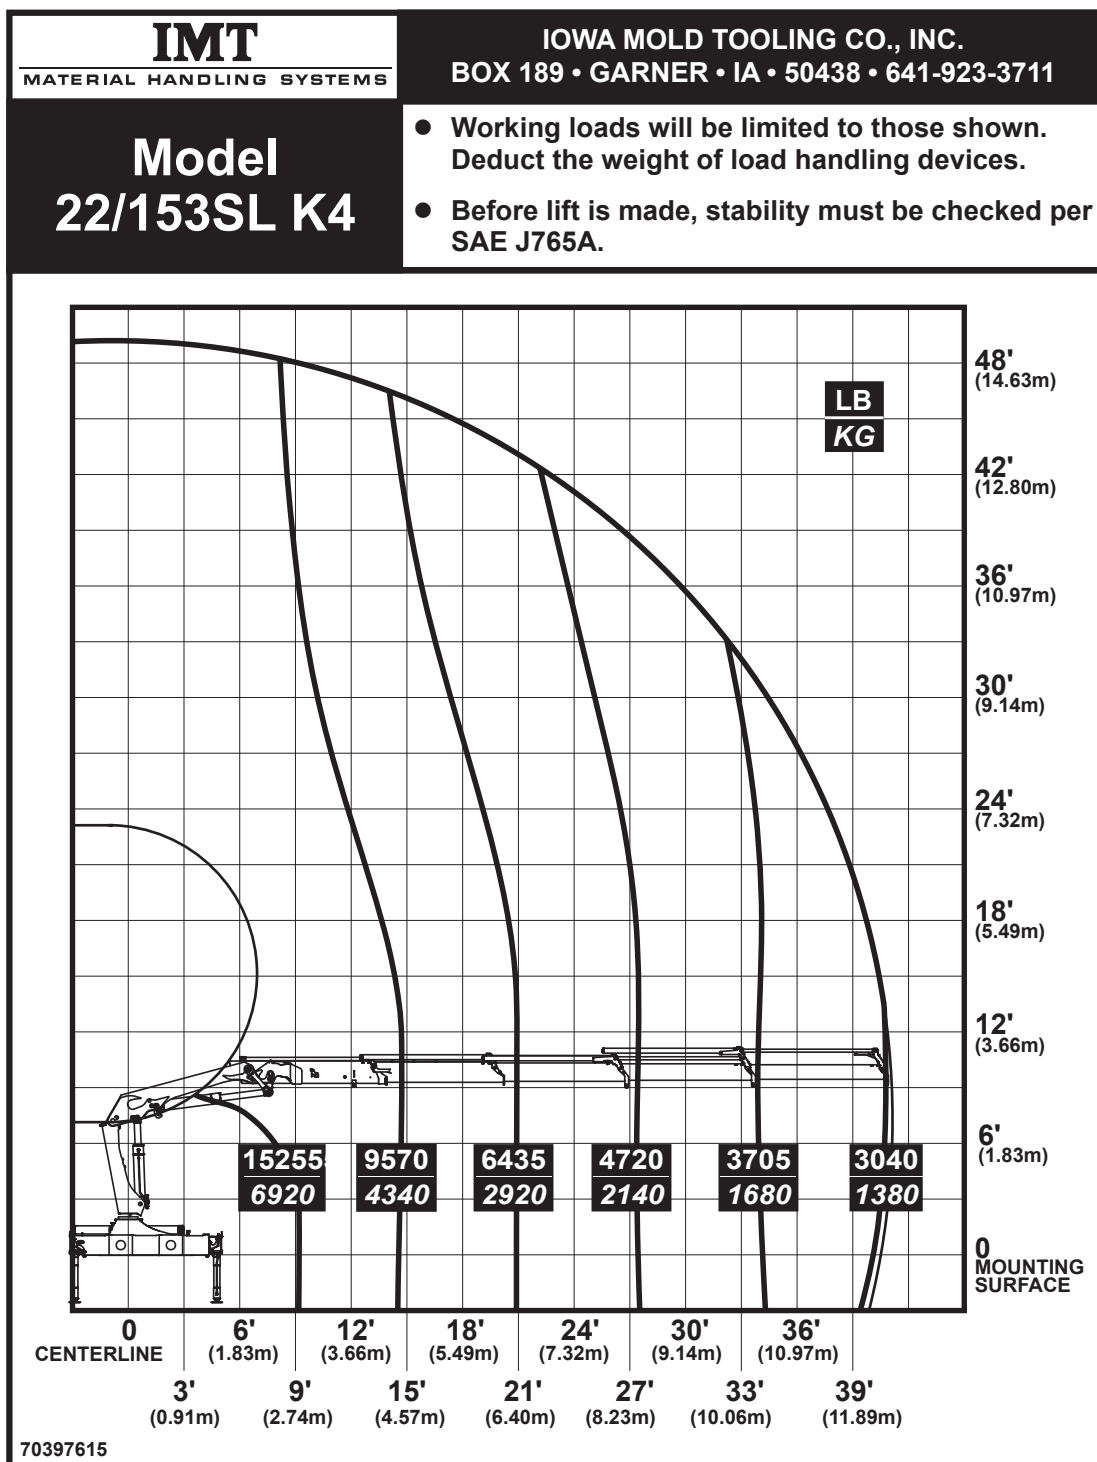


22/153SL K5 Capacity Chart

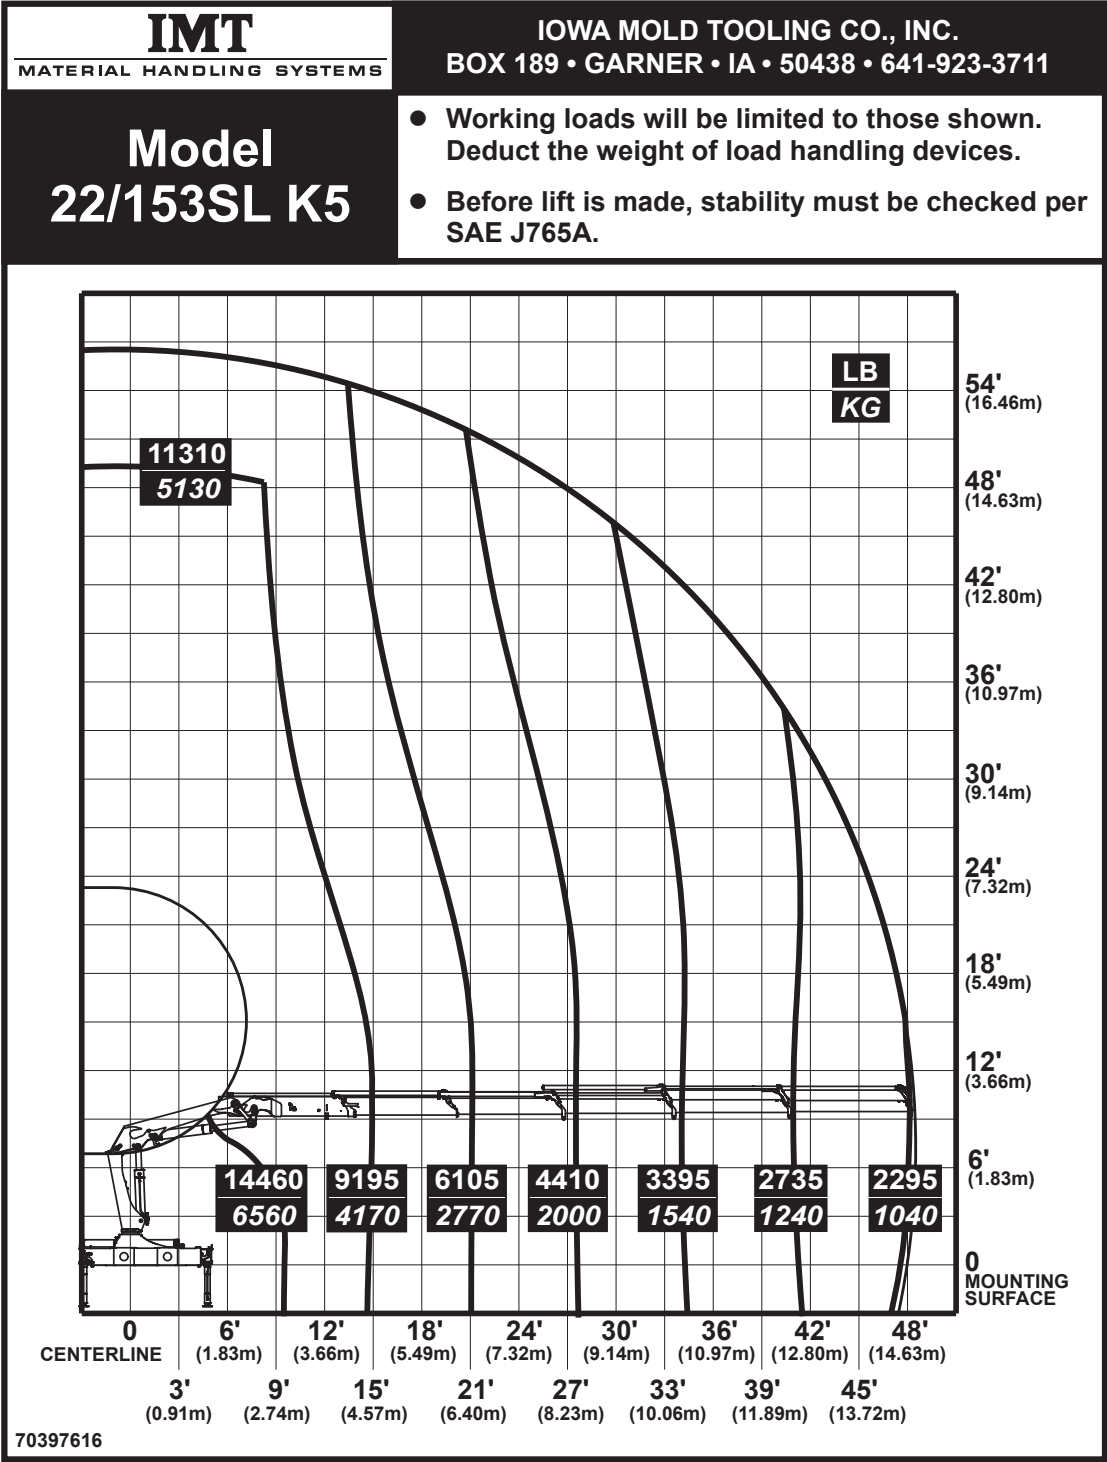

22/153SL K7 Capacity Chart

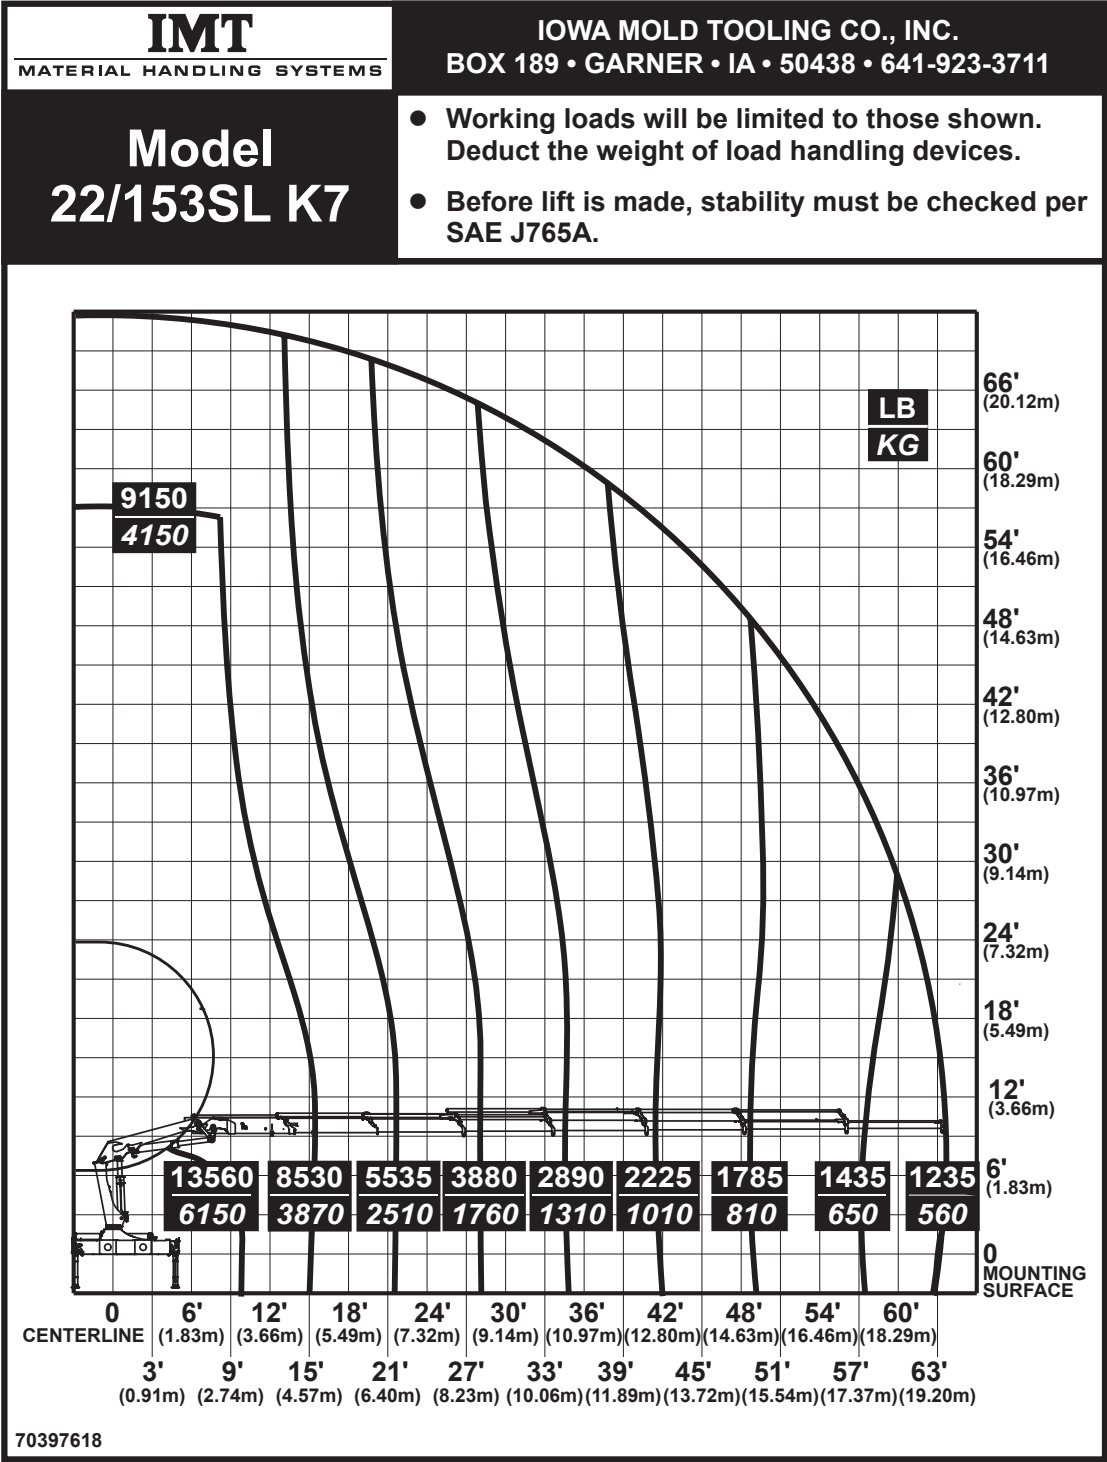


22/153SL K8 Capacity Chart

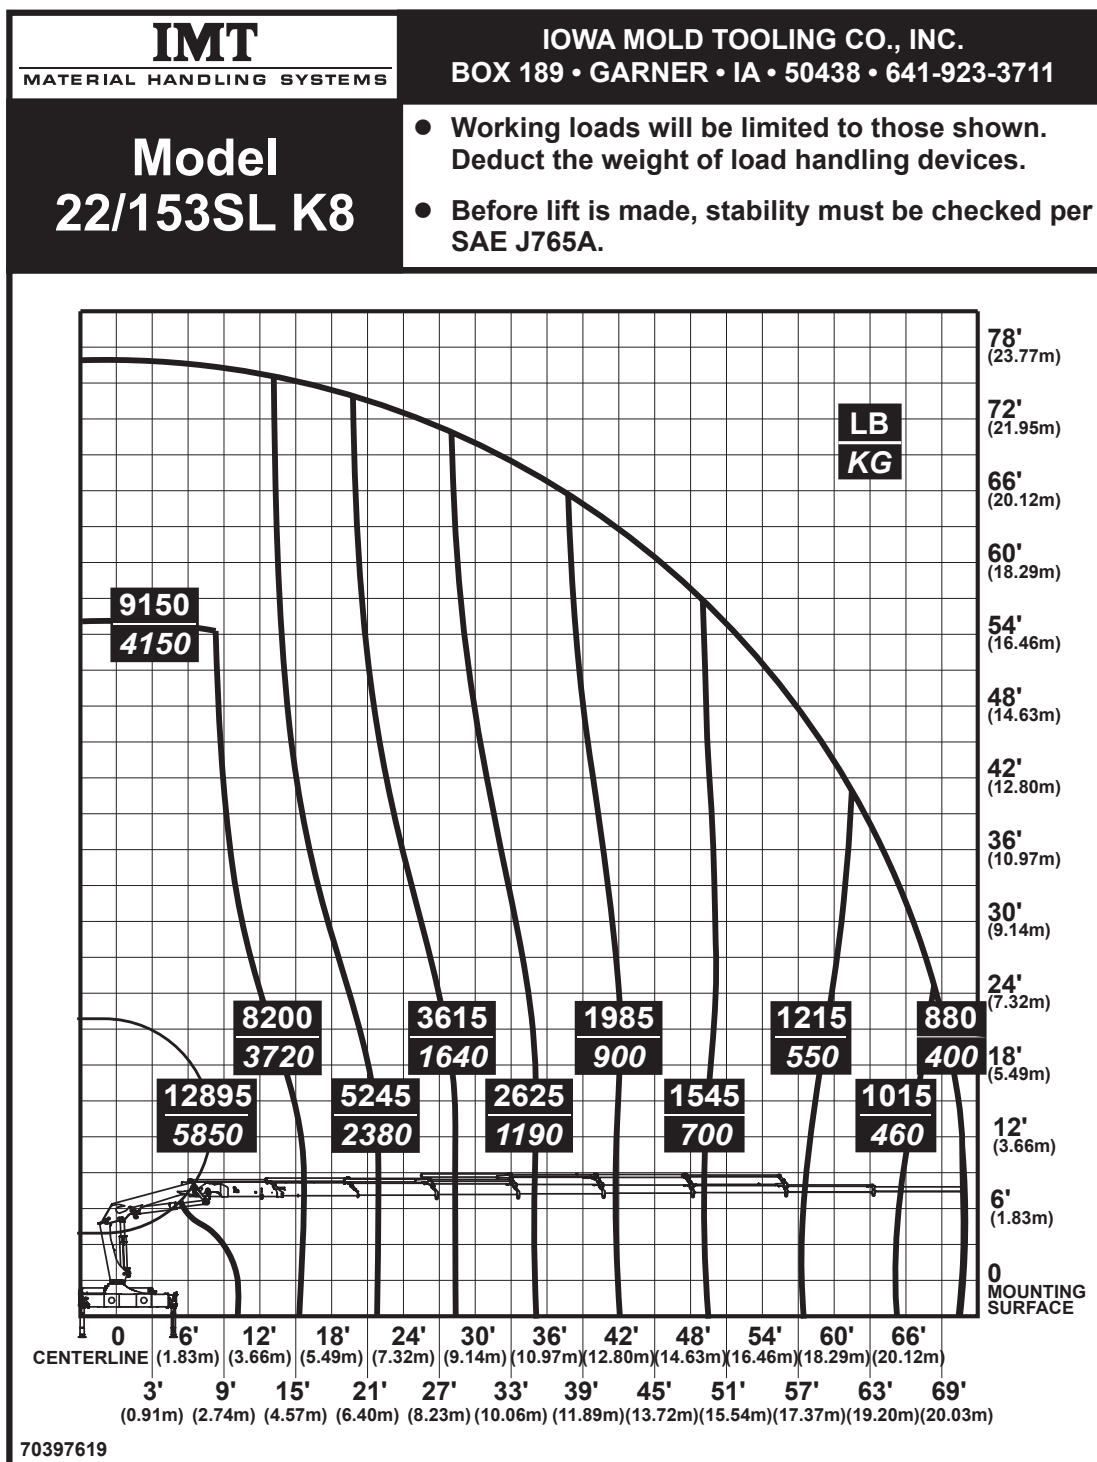

70397619

22/153SL K2-K8 Capacity Chart

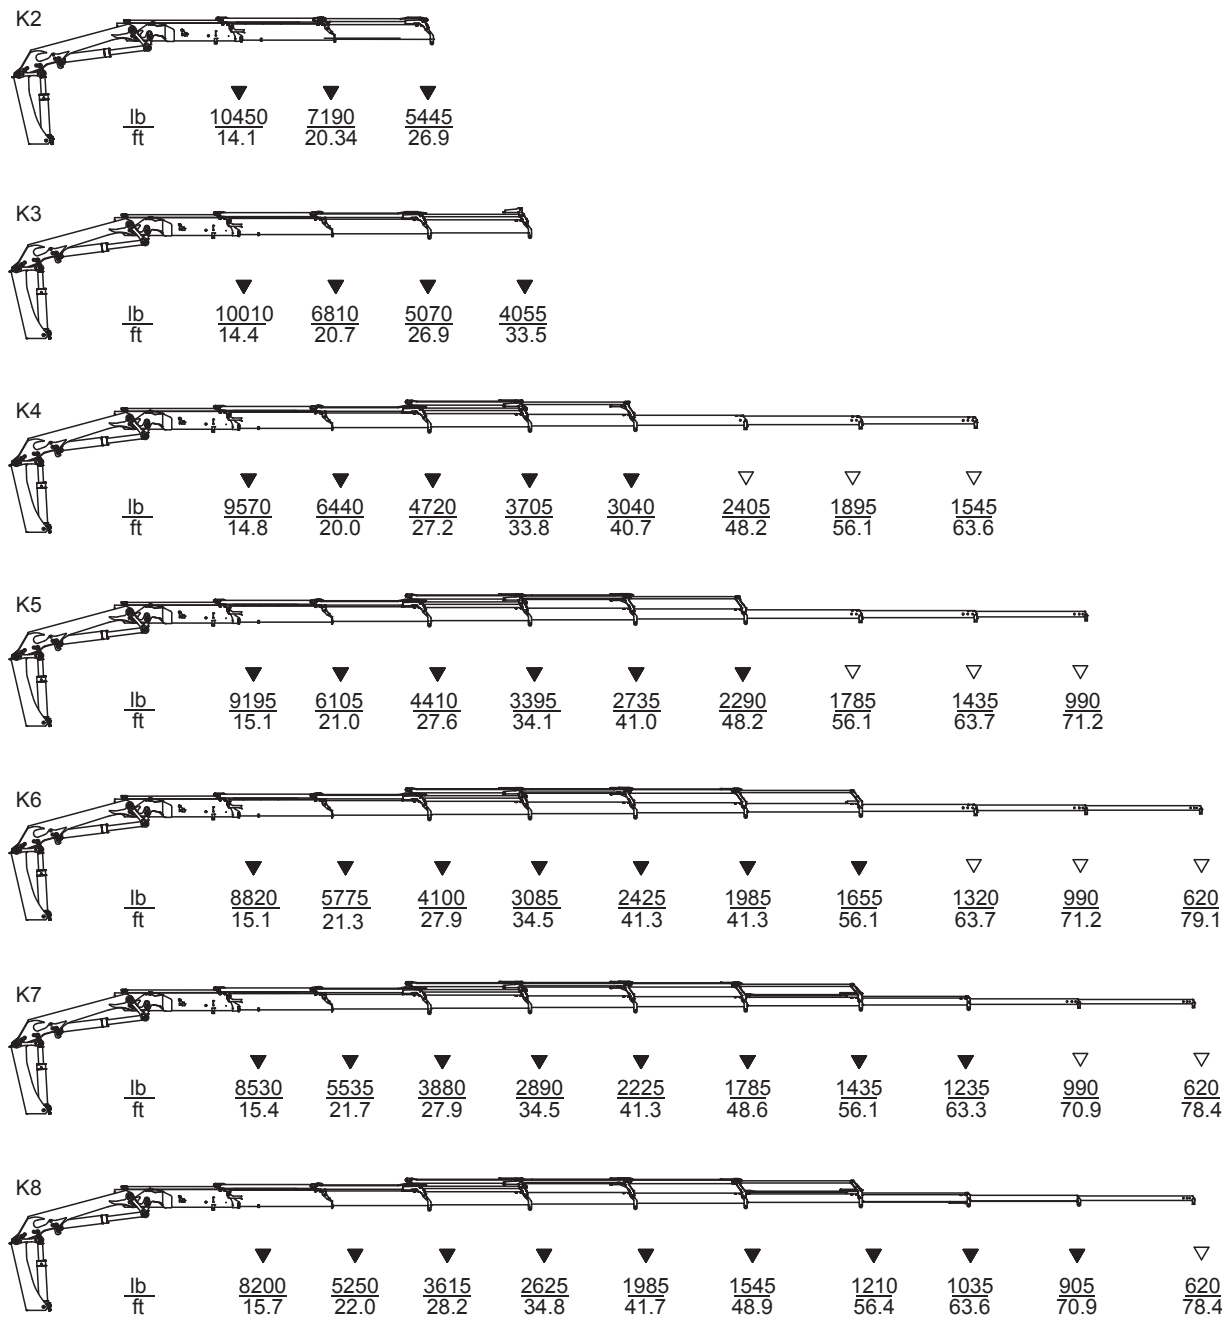

▽ Lifting capacity with man. extensions
▼ Lifting capacity without man. extensions

This Page Left Blank Intentionally

CHAPTER 3

24/169SL Technical Specifications

In this Chapter

24/169SL Performance	18
24/169SL Dimensions	19
24/169SL Weights, Basic Loader	19
24/169SL Weights, Equipment	20
24/169SL Max. Load on Stabilizers (Per Stabilizer Cylinders)	20
24/169SL Power Consumption / Oil Capacity	21

24/169SL Dimensions

	24/169SL K2	24/169SL K3	24/169SL K4	24/169SL K5	24/169SL K6	24/169SL K7	24/169SL K8
Height above chassis	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	91.93" (2335 mm)
Width	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)
Length, no extra valves	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	39.17" (995 mm)	39.17" (995 mm)
Length, with extra valves (hose guides)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)		
Length, with 1 extra valve (hose reels)						39.17" (995 mm)	39.17" (995 mm)
Length, with 2 extra valves (hose reels)						40.55" (1030 mm)	40.55" (1030 mm)
Length, with extra valves (int. hose routing)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)		
Stabilizer spread, S1 (standard)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)
Stabilizer spread, D	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)

24/169SL Weights, Basic Loader

	24/169SL K2	24/169SL K3	24/169SL K4	24/169SL K5	24/169SL K6	24/169SL K7	24/169SL K8
Standard loader 1), excl. stabilizers	4178 lb (1895 kg)	4553 lb (2065 kg)	4994 lb (2265 kg)	5324 lb (2415 kg)	5633 lb (2555 kg)	5864 lb (2660 kg)	6052 lb (2745 kg)
Stabilizers, S1 fixed	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)
Stabilizers, S1 swing-up	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)
Stabilizers, S1 hydr. swing-up	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)
Stabilizers, D fixed	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)
Stabilizers, D swing-up	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)
Stabilizers, D hydr. swing-up	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)
Mounting kit, 4 bolts	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)
Mounting kit, 8 bolts	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)
Tank, excl. oil (fitted on loader)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)z
Manual extensions			176 lb (80 kg)	154 lb (70 kg)	132 lb (60 kg)	88 lb (45 kg)	77 lb (35 kg)
			154 lb (70 kg)	132 lb (60 kg)	88 lb (45 kg)	77 lb (35 kg)	
			132 lb (60 kg)	88 lb (45 kg)	77 lb (35 kg)		
Oil in loader (stowing position)	88 lb (45 kg)	110 lb (50 kg)	121 lb (55 kg)	132 lb (60 kg)	143 lb (65 kg)	154 lb (70 kg)	154 lb (70 kg)

1) Weights $\pm$ 5% because of tolerances for plate thickness

24/169SL Weights, Equipment

[illegible]

24/169SL Max. Load on Stabilizers (Per Stabilizer Cylinder)

[illegible]

24/169SL Power Consumption / Oil Capacity

[illegible]

This Page Left Blank Intentionally

CHAPTER 4

24/169SL Capacity Charts

In this Chapter

24/169SL Capacity Chart K224

24/169SL Capacity Chart K325

24/169SL Capacity Chart K426

24/169SL Capacity Chart K527


24/169SL Capacity Chart K628

24/169SL Capacity Chart K729


24/169SL Capacity Chart K830

24/169SL Capacity Chart K2-K831


24/169SL Capacity Chart K2

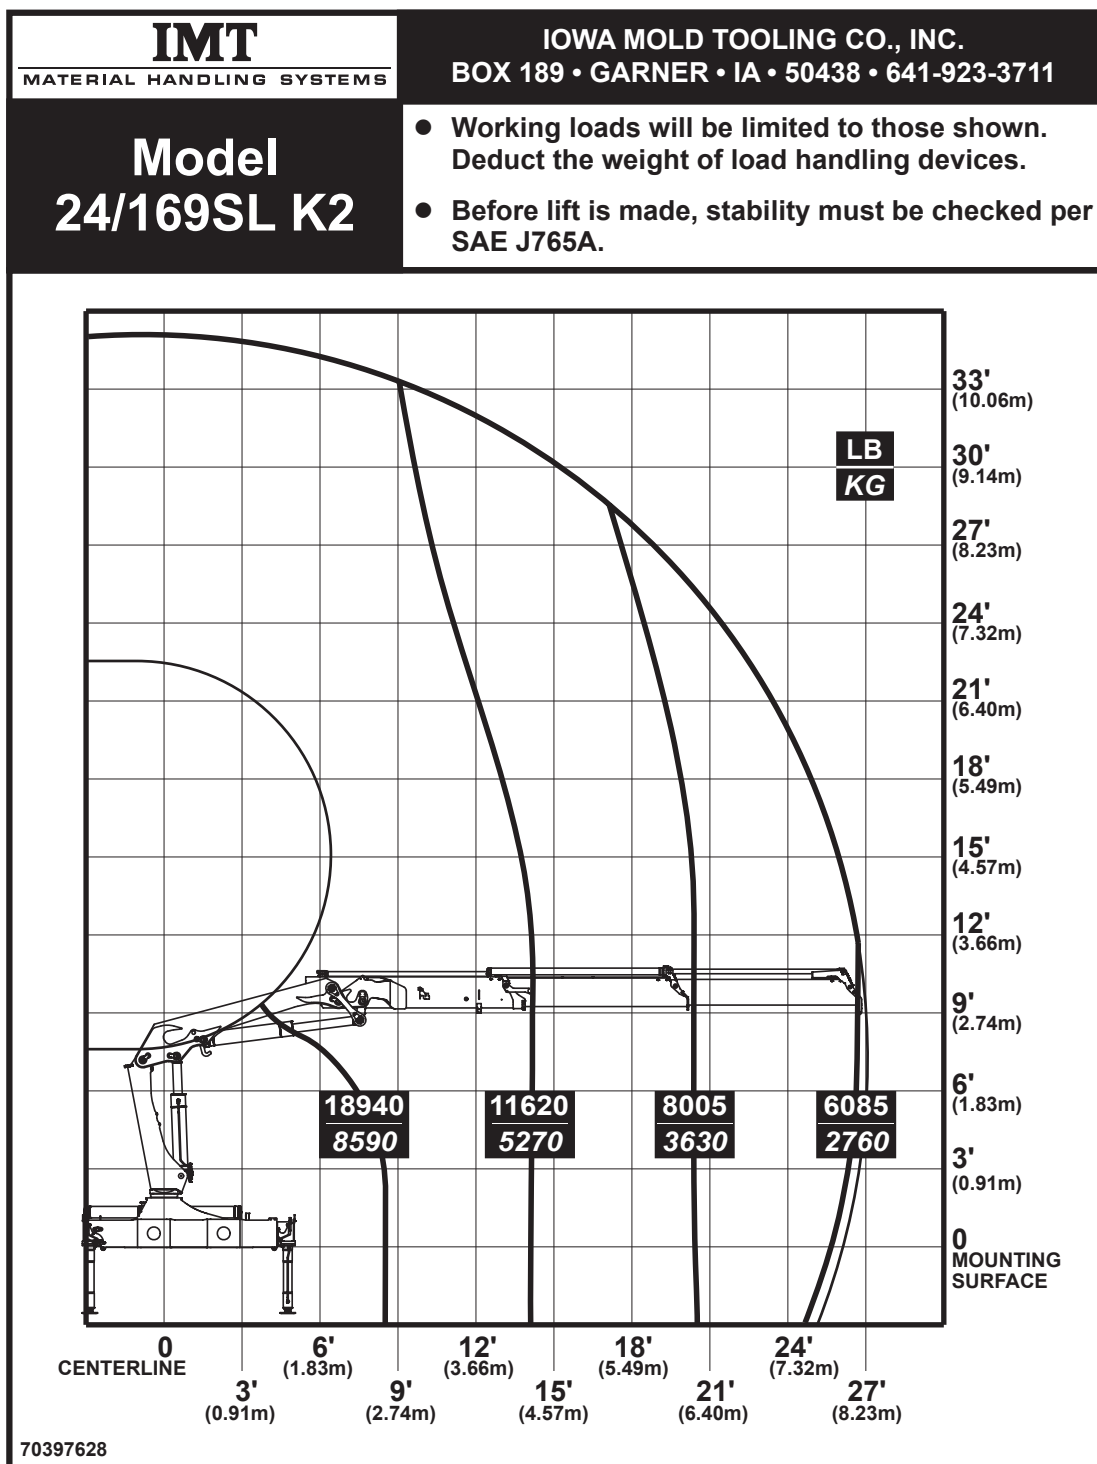


24/169SL Capacity Chart K4

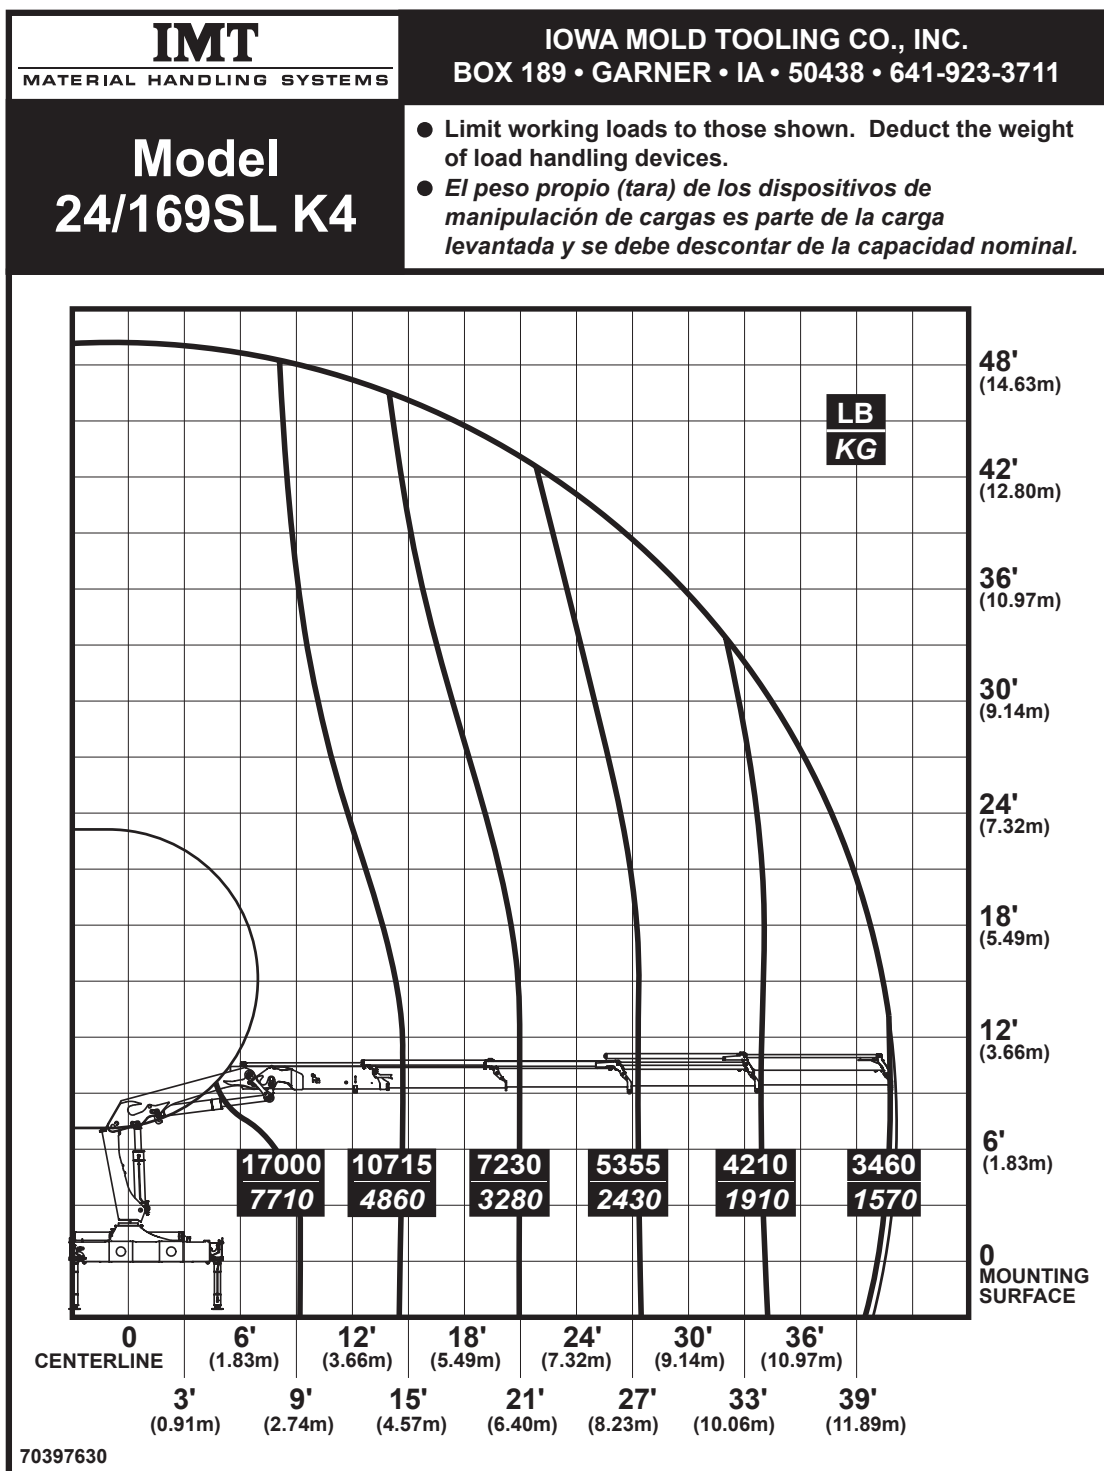


24/169SL Capacity Chart K5

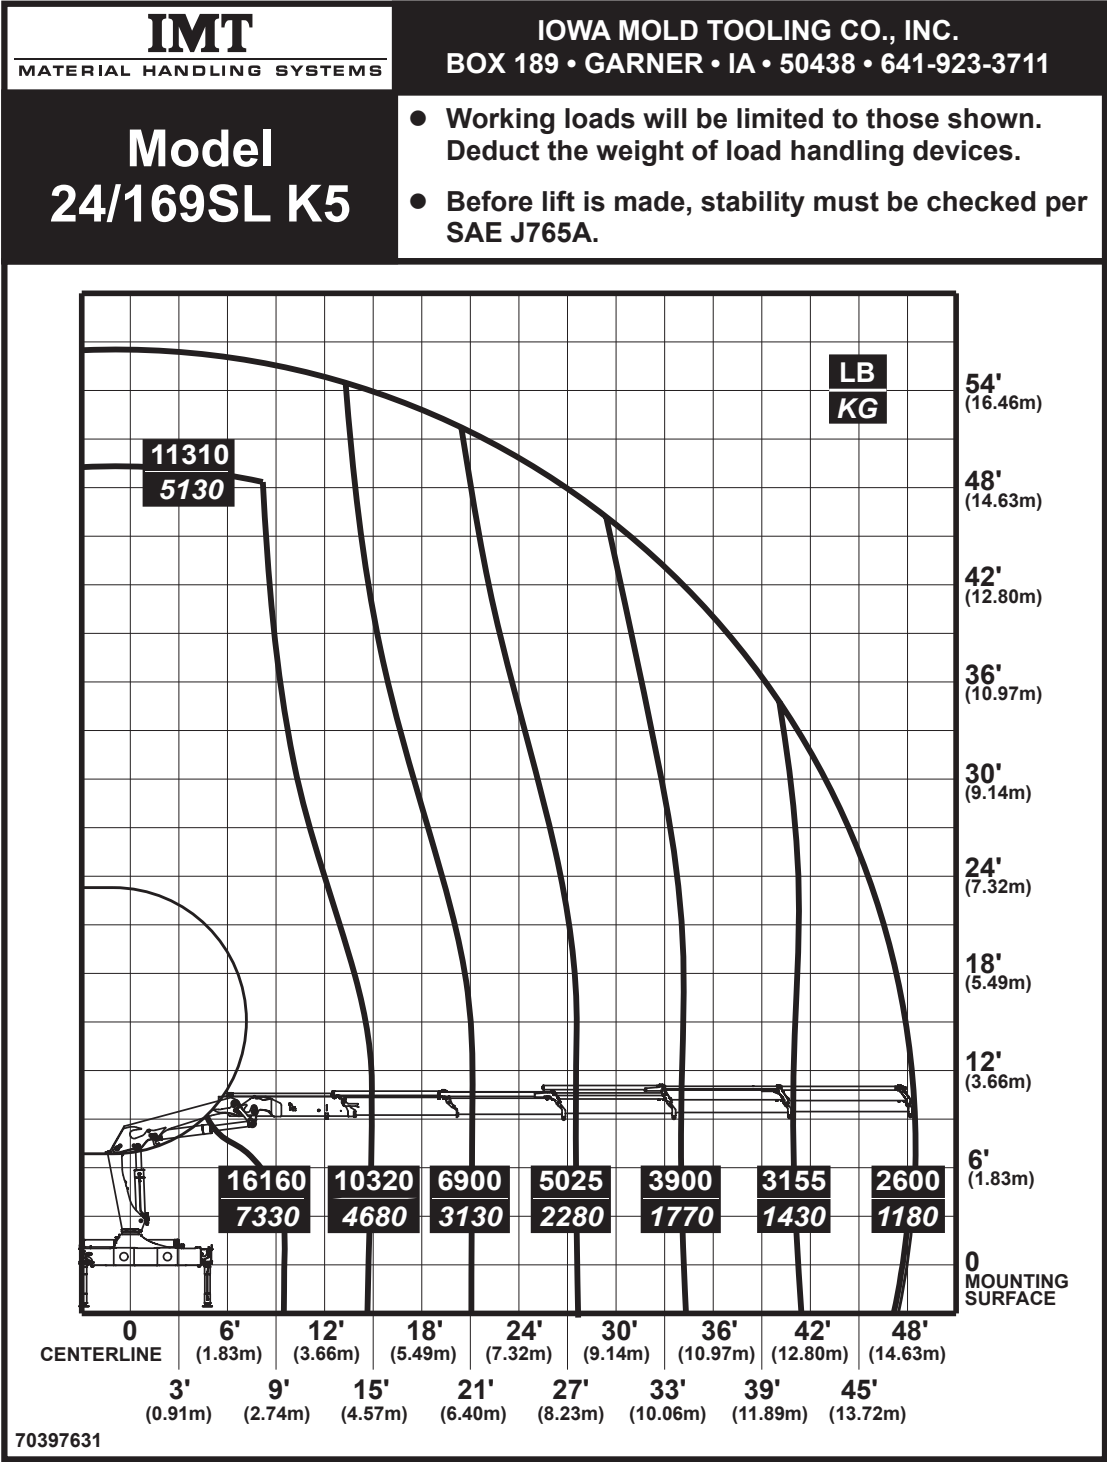


24/169SL Capacity Chart K6

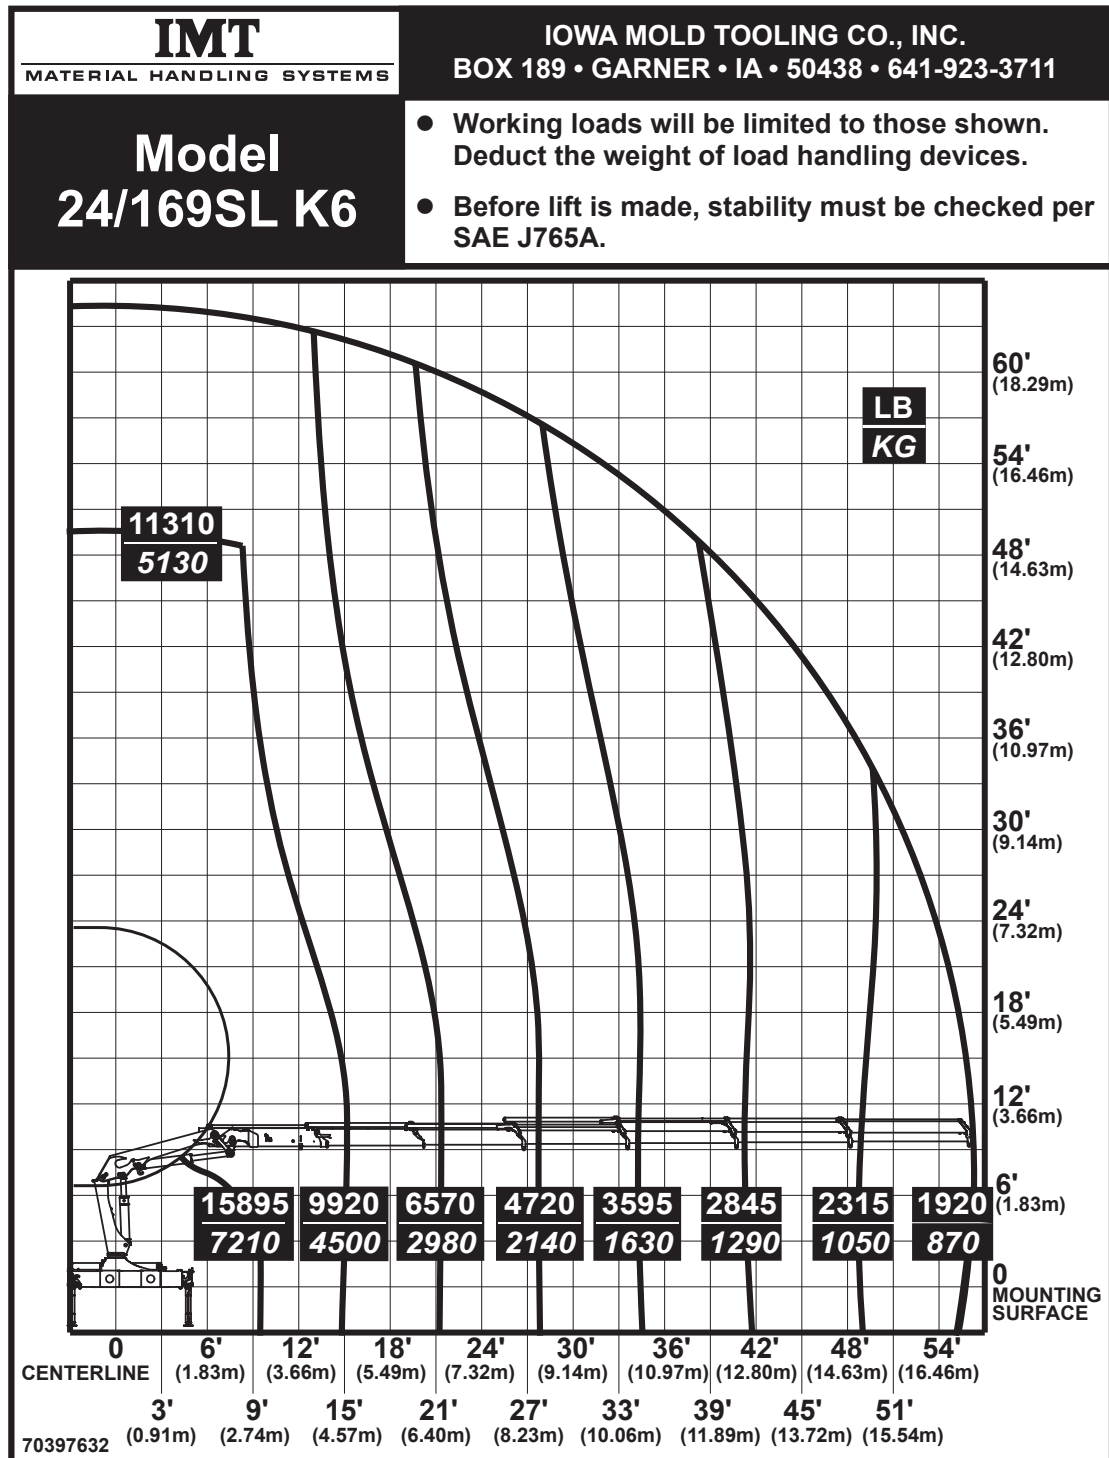


24/169SL Capacity Chart K7

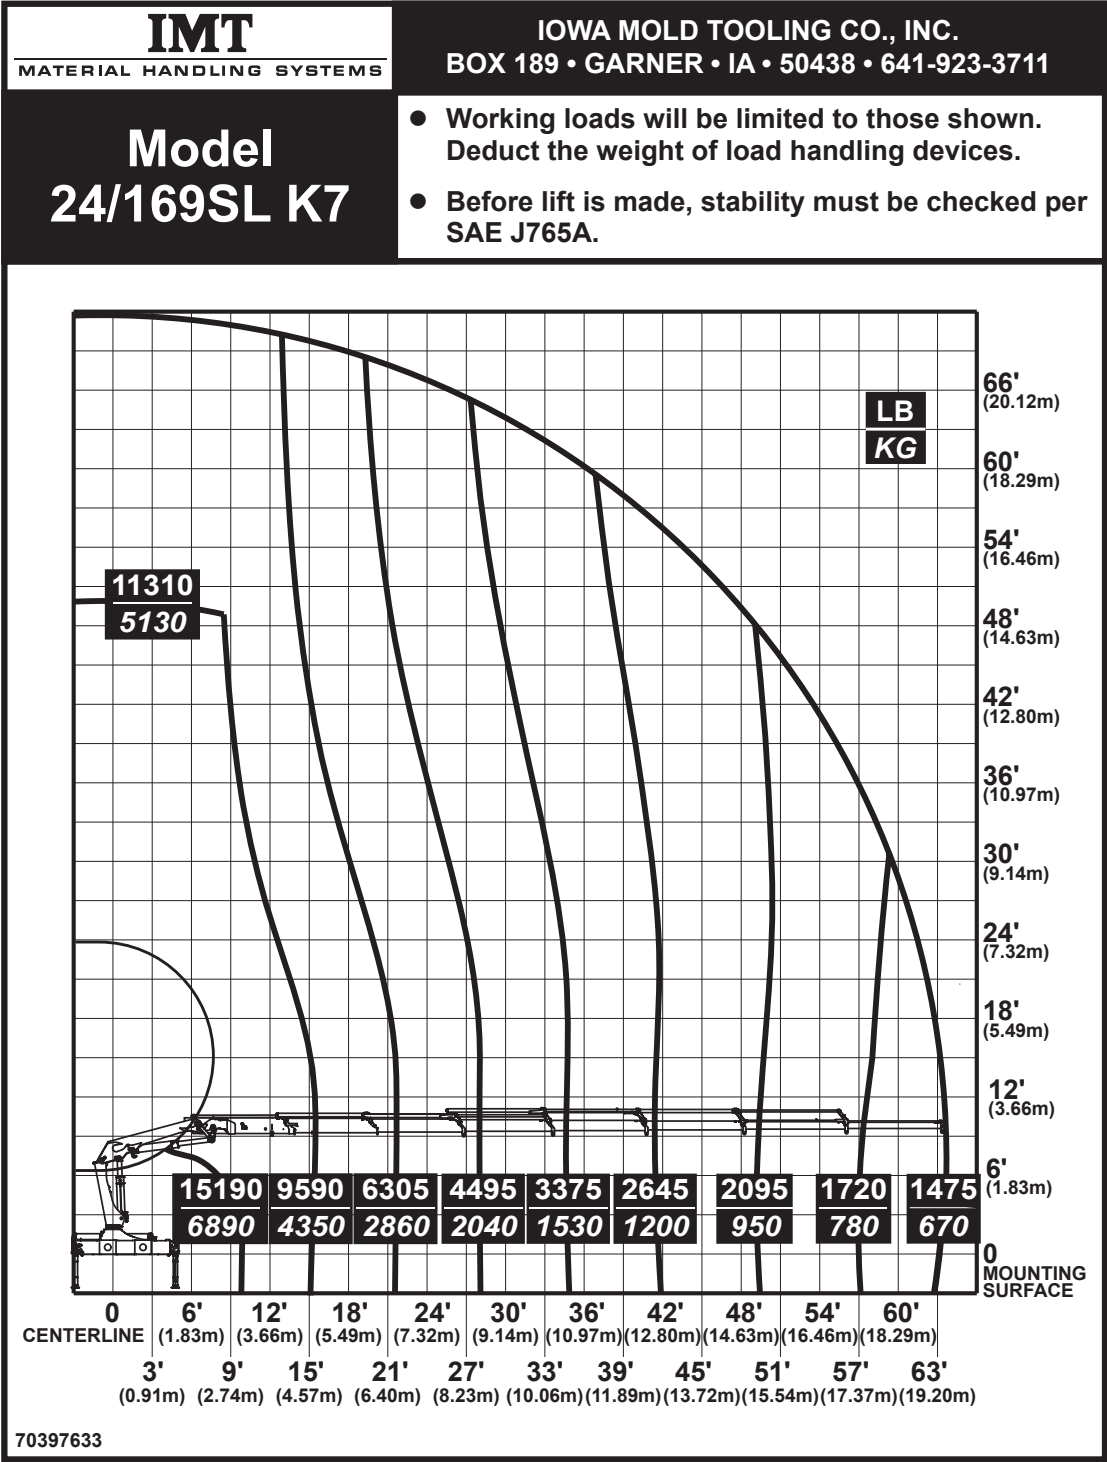

24/169SL Capacity Chart K8

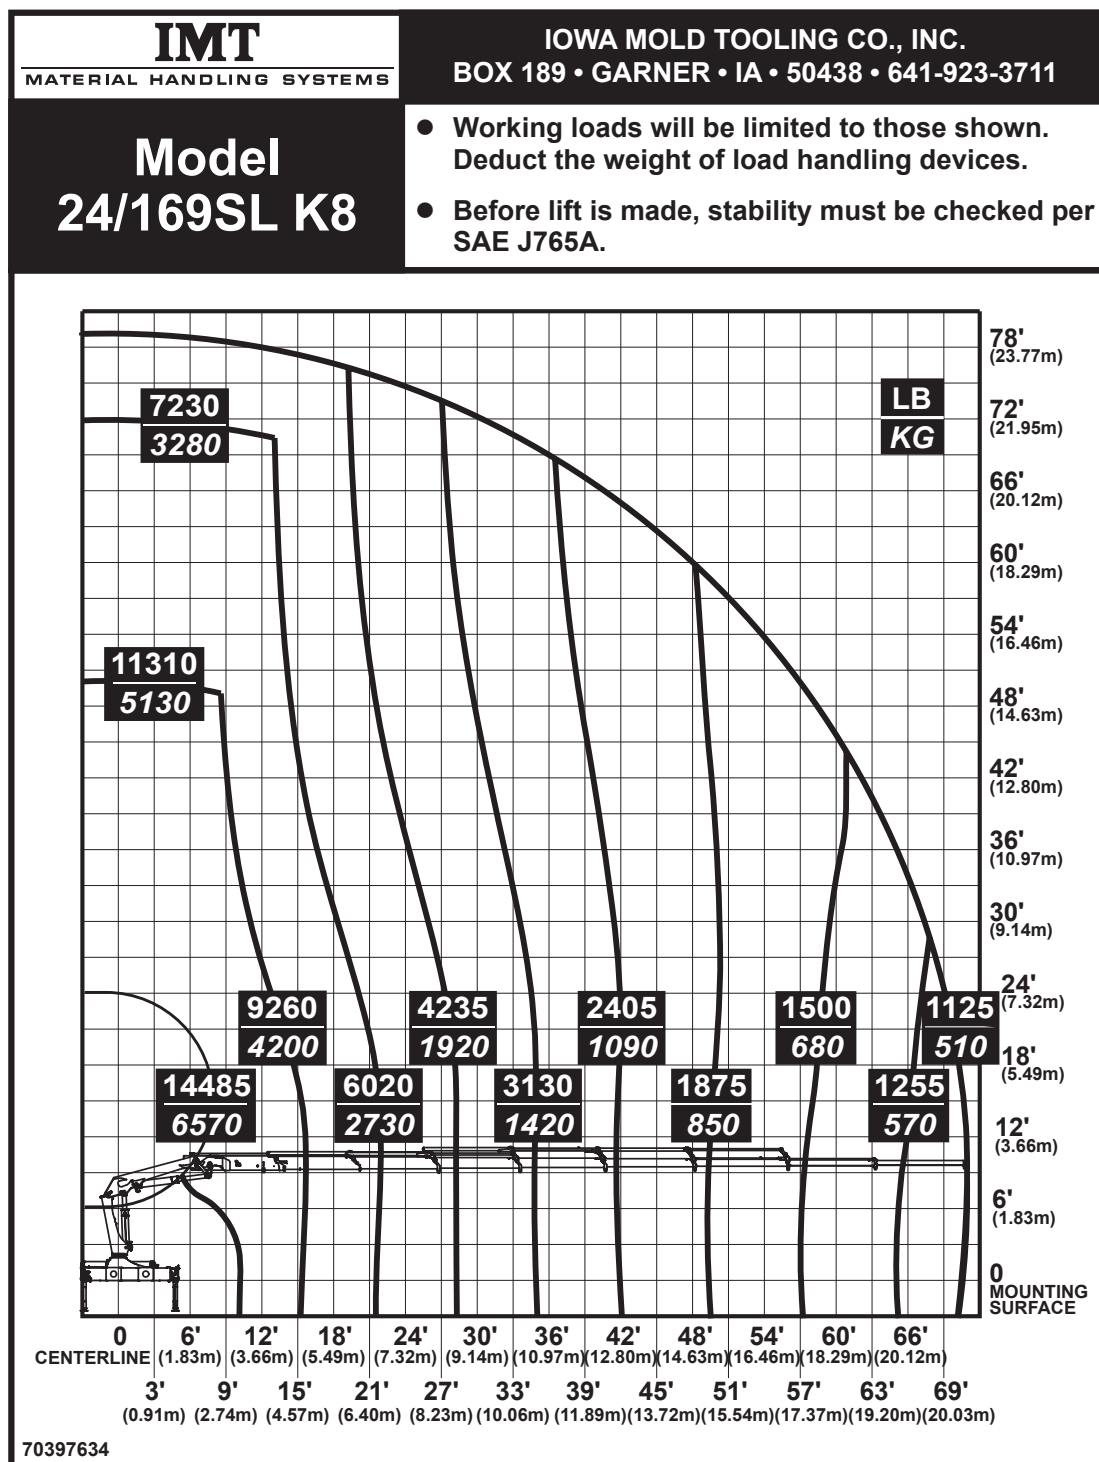

24/169SL Capacity Chart K2-K8

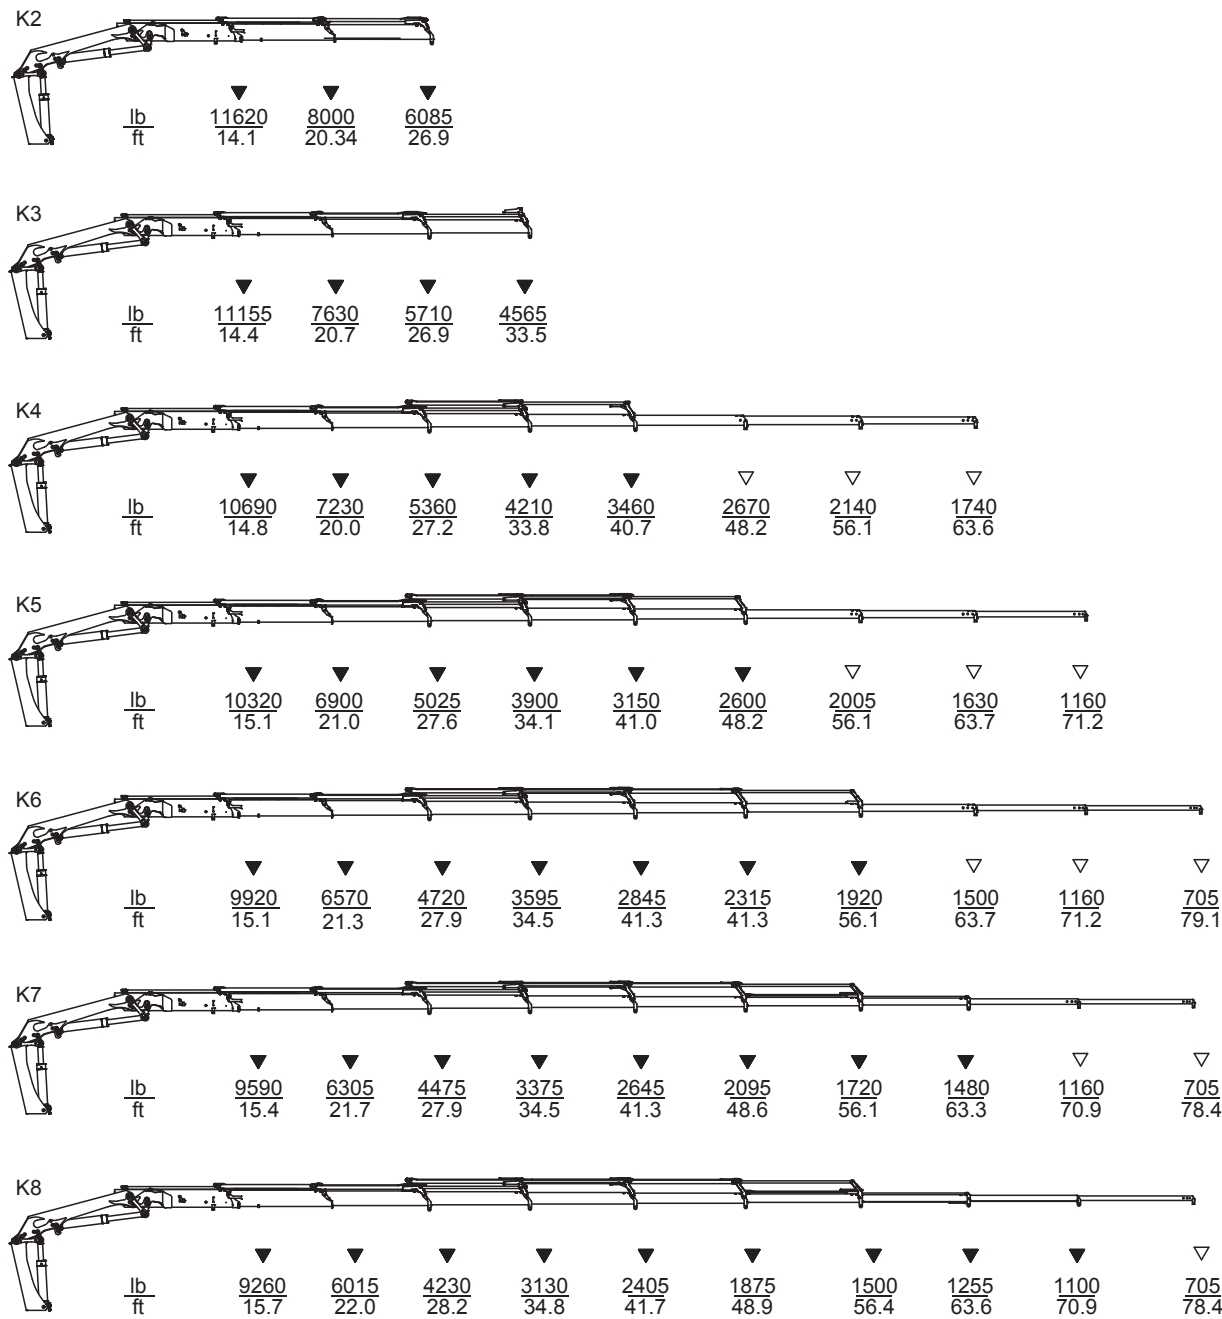

▽ Lifting capacity with man. extensions
▼ Lifting capacity without man. extensions

This Page Left Blank Intentionally

CHAPTER 5

26/180SL Technical Specifications

In this Chapter

26/180SL Performance	34
26/180SL Dimensions	35
26/180SL Weights, Basic Loader	35
26/180SL Weights, Equipment	36
26/180SL Max. Load on Stabilizers (Per Stabilizer Cylinders)	36
26/180SL Power Consumption / Oil Capacity	37

26/180SL Dimensions

	26/180SL K2	26/180SL K3	26/180SL K4	26/180SL K5	26/180SL K6	26/180SL K7	26/180SL K8
Height above chassis	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)	90.35" (2295 mm)
Width	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)	98.43" (2500 mm)
Length, no extra valves	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	39.17" (995 mm)	39.17" (995 mm)
Length, with extra valves (hose guides)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)	39.57" (1005 mm)		
Length, with 1 extra valve (hose reels)						39.17" (995 mm)	39.17" (995 mm)
Length, with 2 extra valves (hose reels)						40.55" (1030 mm)	40.55" (1030 mm)
Length, with extra valves (int. hose routing)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)	34.84" (885 mm)		
Stabilizer spread, S1 (standard)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)	219.49" (5575 mm)
Stabilizer spread, D	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)	254.13" (6455 mm)

26/180SL Weights, Basic Loader

	26/180SL K2	26/180SL K3	26/180SL K4	26/180SL K5	26/180SL K6	26/180SL K7	26/180SL K8
Standard loader 1), excl. Stabilizers	4178 lb (1895 kg)	4553 lb (2065 kg)	4993 lb (2265 kg)	5324 lb (2415 kg)	5633 lb (2555 kg)	5864 lb (2660 kg)	6052 lb (2745 kg)
Stabilizers, S1 fixed	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)	639 lb (290 kg)
Stabilizers, S1 swing-up	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)	650 lb (295 kg)
Stabilizers, S1 hydr. swing-up	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)	661 lb (300 kg)
Stabilizers, D fixed	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)	805 lb (365 kg)
Stabilizers, D swing-up	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)	815 lb (370 kg)
Stabilizers, D hydr. swing-up	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)	827 lb (375 kg)
Mounting kit, 4 bolts	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)	143 lb (65 kg)
Mounting kit, 8 bolts	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)	132 lb (60 kg)
Tank, excl. oil (fitted on loader)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)	88 lb (45 kg)z
Manual extensions			176 lb (80 kg)	154 lb (70 kg)	132 lb (60 kg)	88 lb (45 kg)	77 lb (35 kg)
			154 lb (70 kg)	132 lb (60 kg)	88 lb (45 kg)	77 lb (35 kg)	
			132 lb (60 kg)	88 lb (45 kg)	77 lb (35 kg)		
Oil in loader (stowing position)	88 lb (40 kg)	88 lb (45 kg)	110 lb (50 kg)	121 lb (55 kg)	132 lb (60 kg)	143 kg (65 kg)	154 lb (70 kg)

1) Weights $\pm$ 5% because of tolerances for plate thickness

26/180SL Weights, Equipment

[illegible]

26/180SL Max. Load on Stabilizers (Per Stabilizer Cylinder)

[illegible]

26/180SL Power Consumption / Oil Capacity

[illegible]

This Page Left Blank Intentionally

CHAPTER 6

26/180SL Capacity Charts

In this Chapter

24/169SL Capacity Chart K240

24/169SL Capacity Chart K341

24/169SL Capacity Chart K442

24/169SL Capacity Chart K543


24/169SL Capacity Chart K644

24/169SL Capacity Chart K745

24/169SL Capacity Chart K846


24/169SL Capacity Chart K2-K847

26/180SL Capacity Chart K2

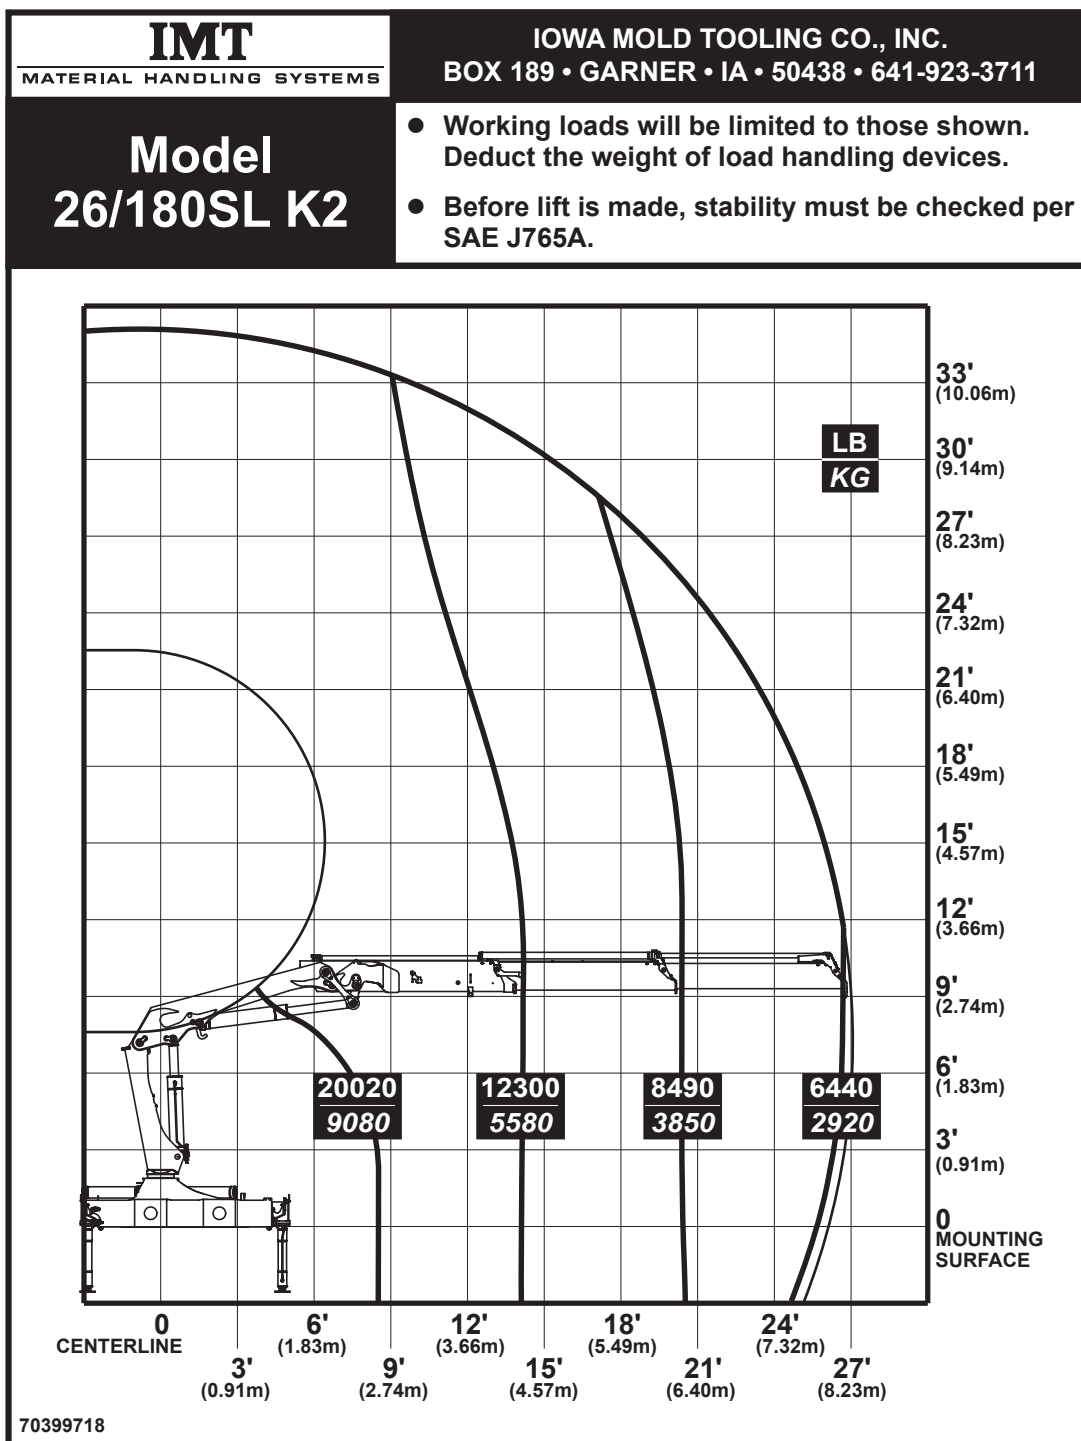


70399718


26/180SL Capacity Chart K3

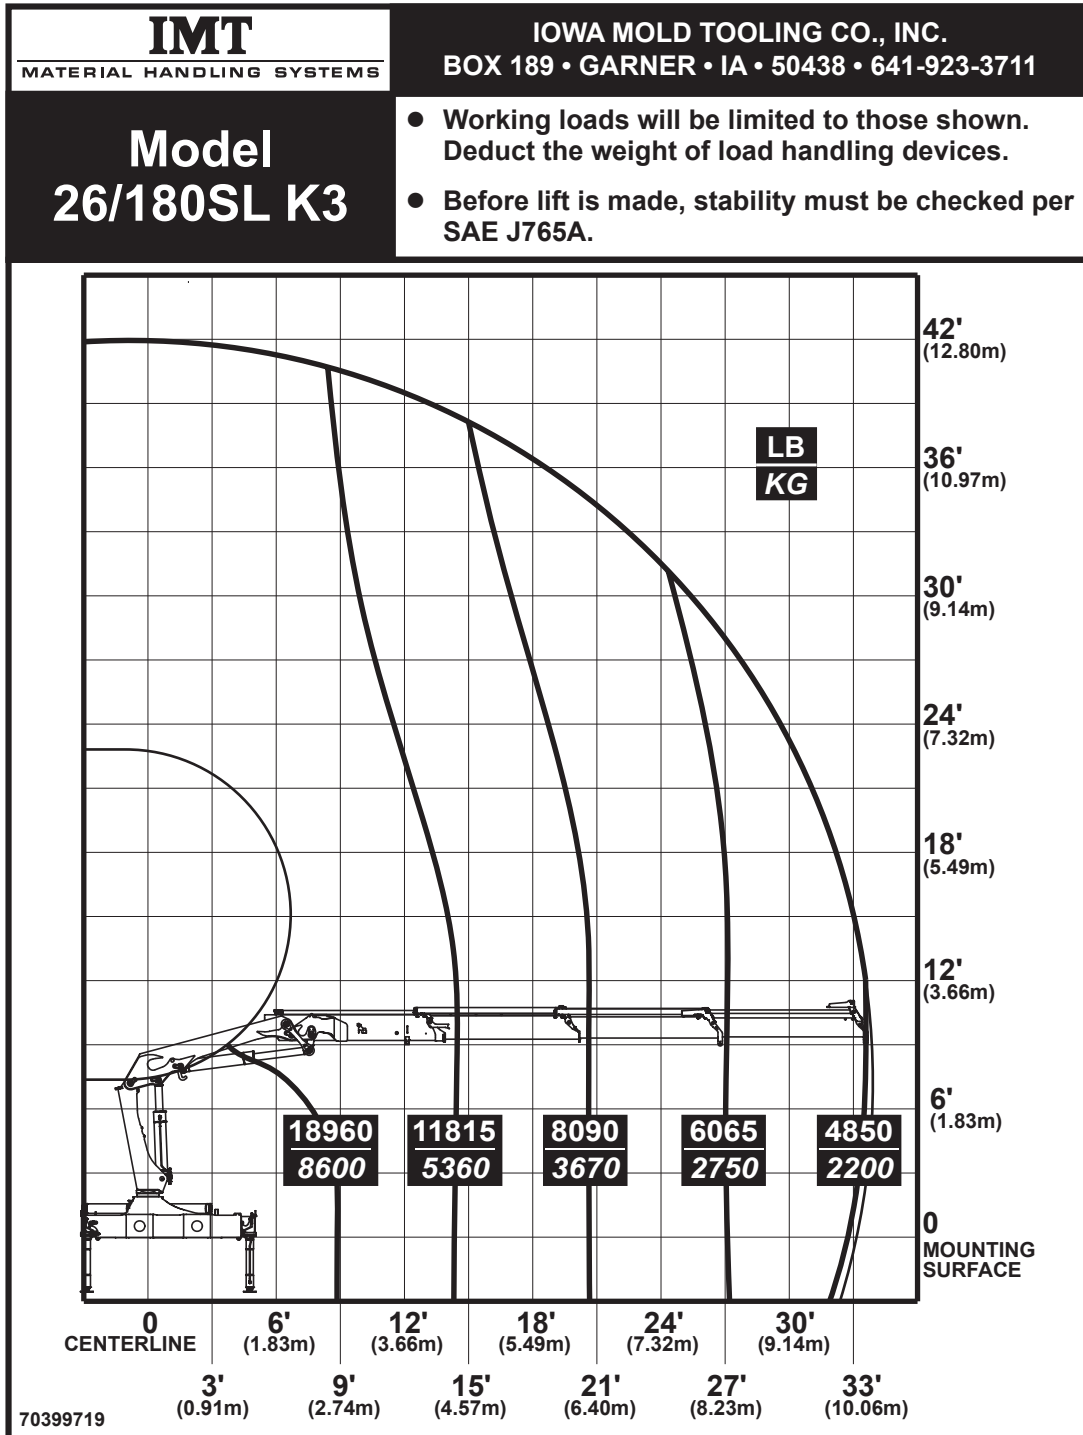


26/180SL Capacity Chart K4

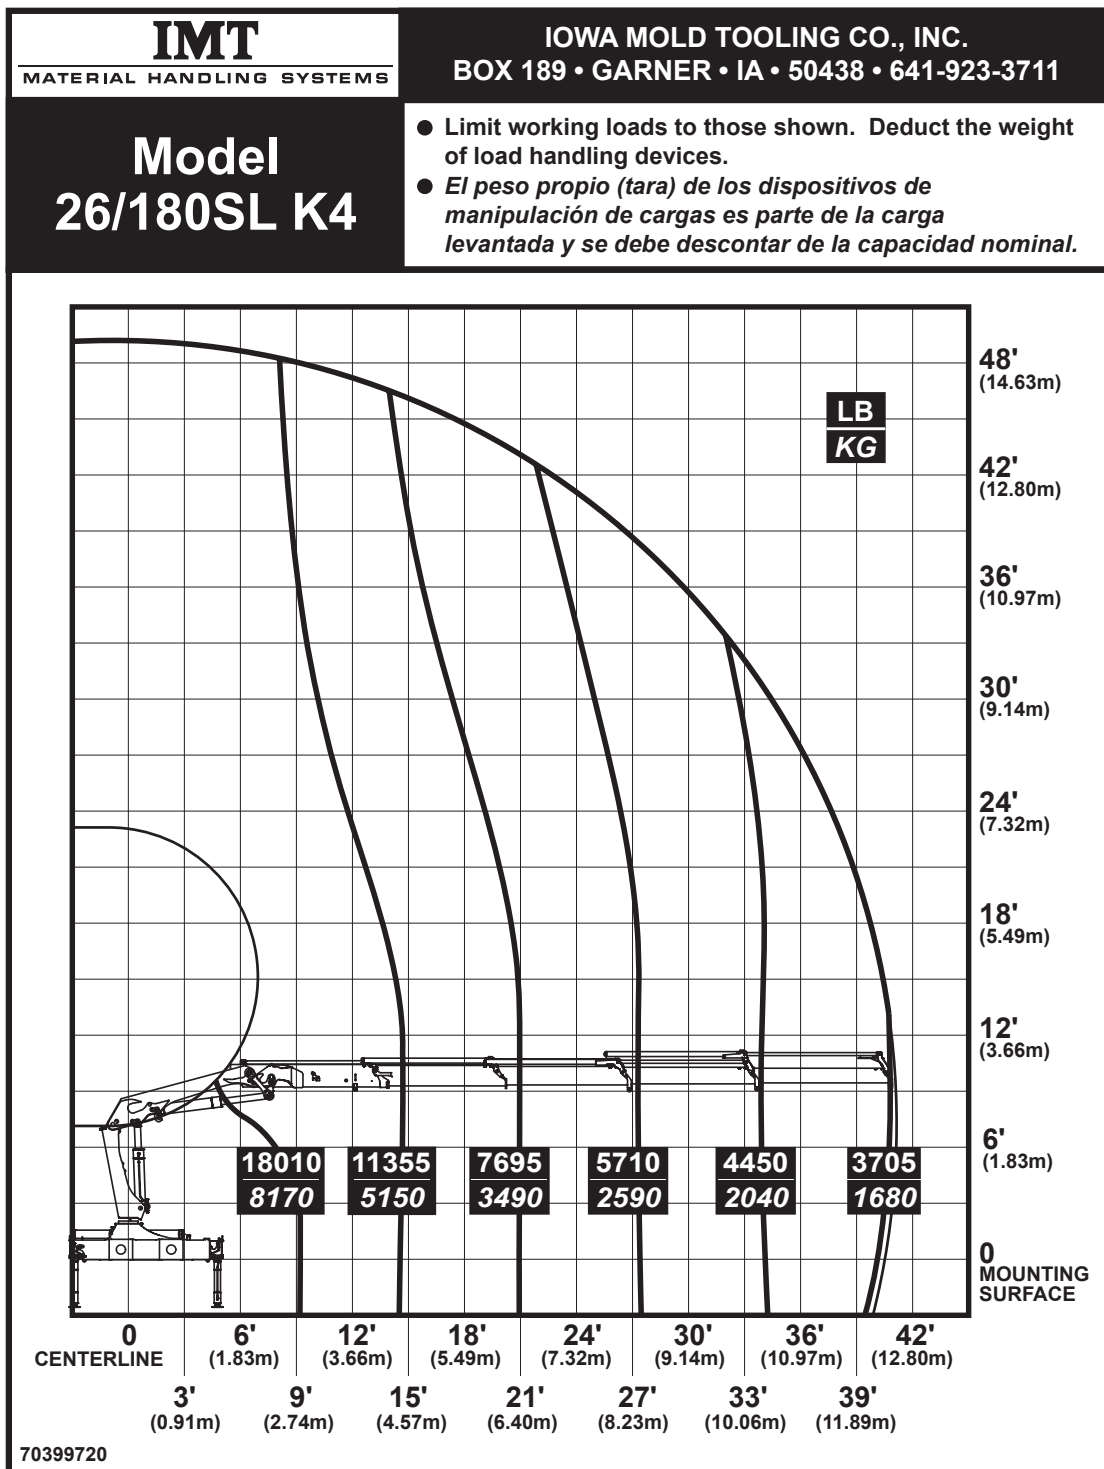


26/180SL Capacity Chart K6

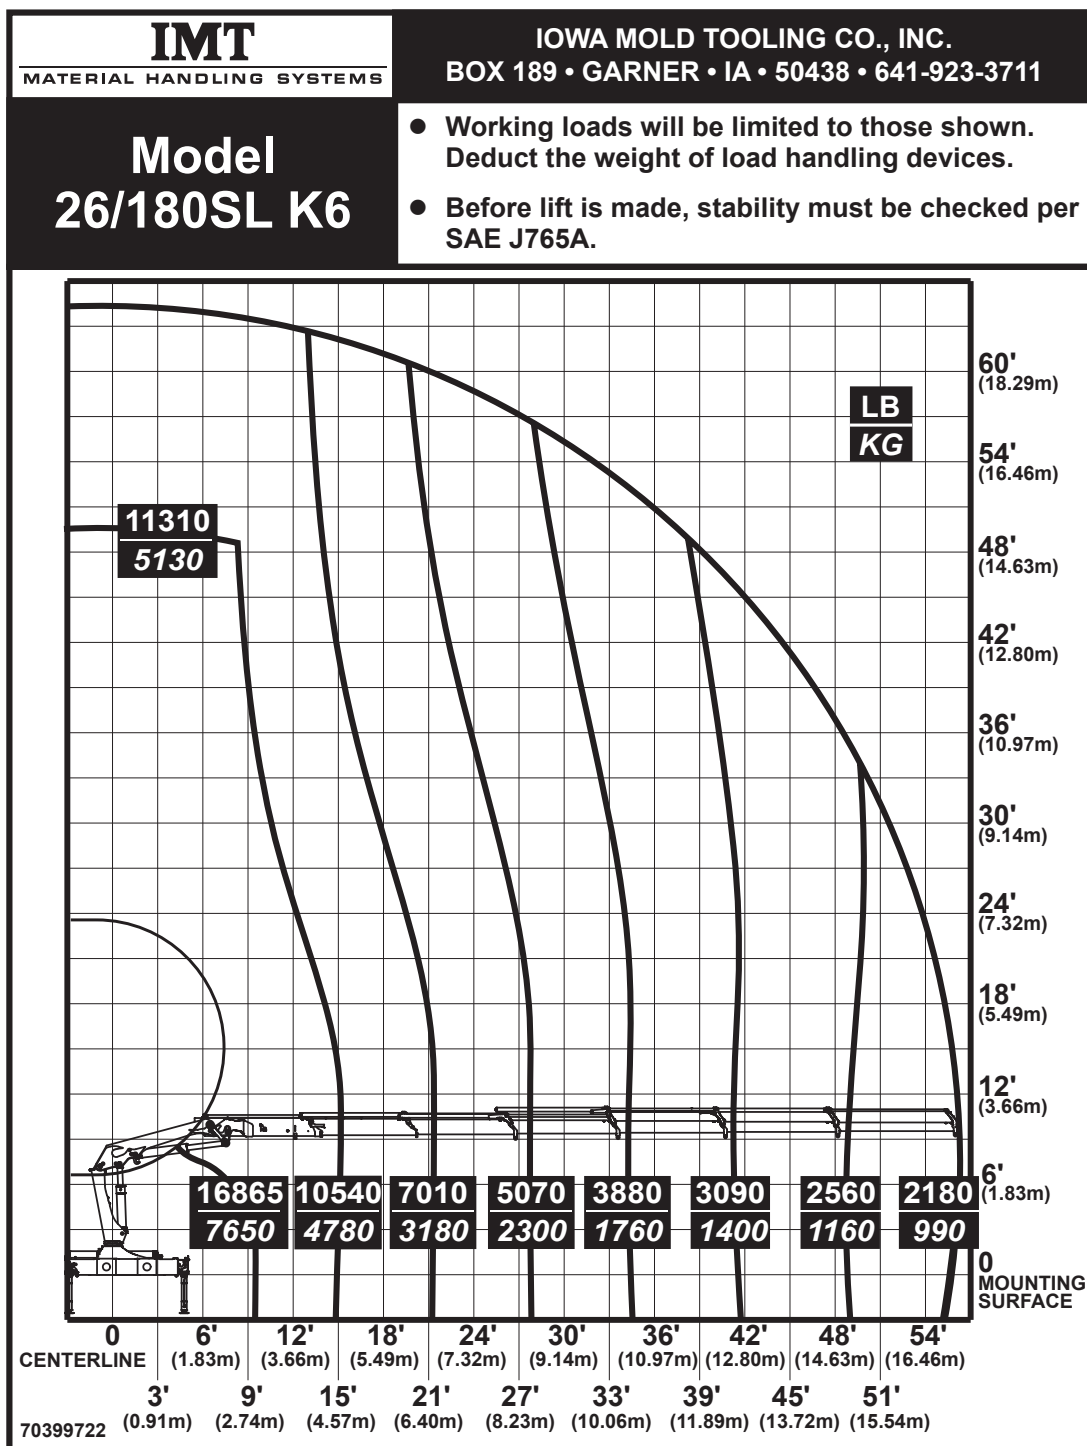

26/180SL Capacity Chart K7







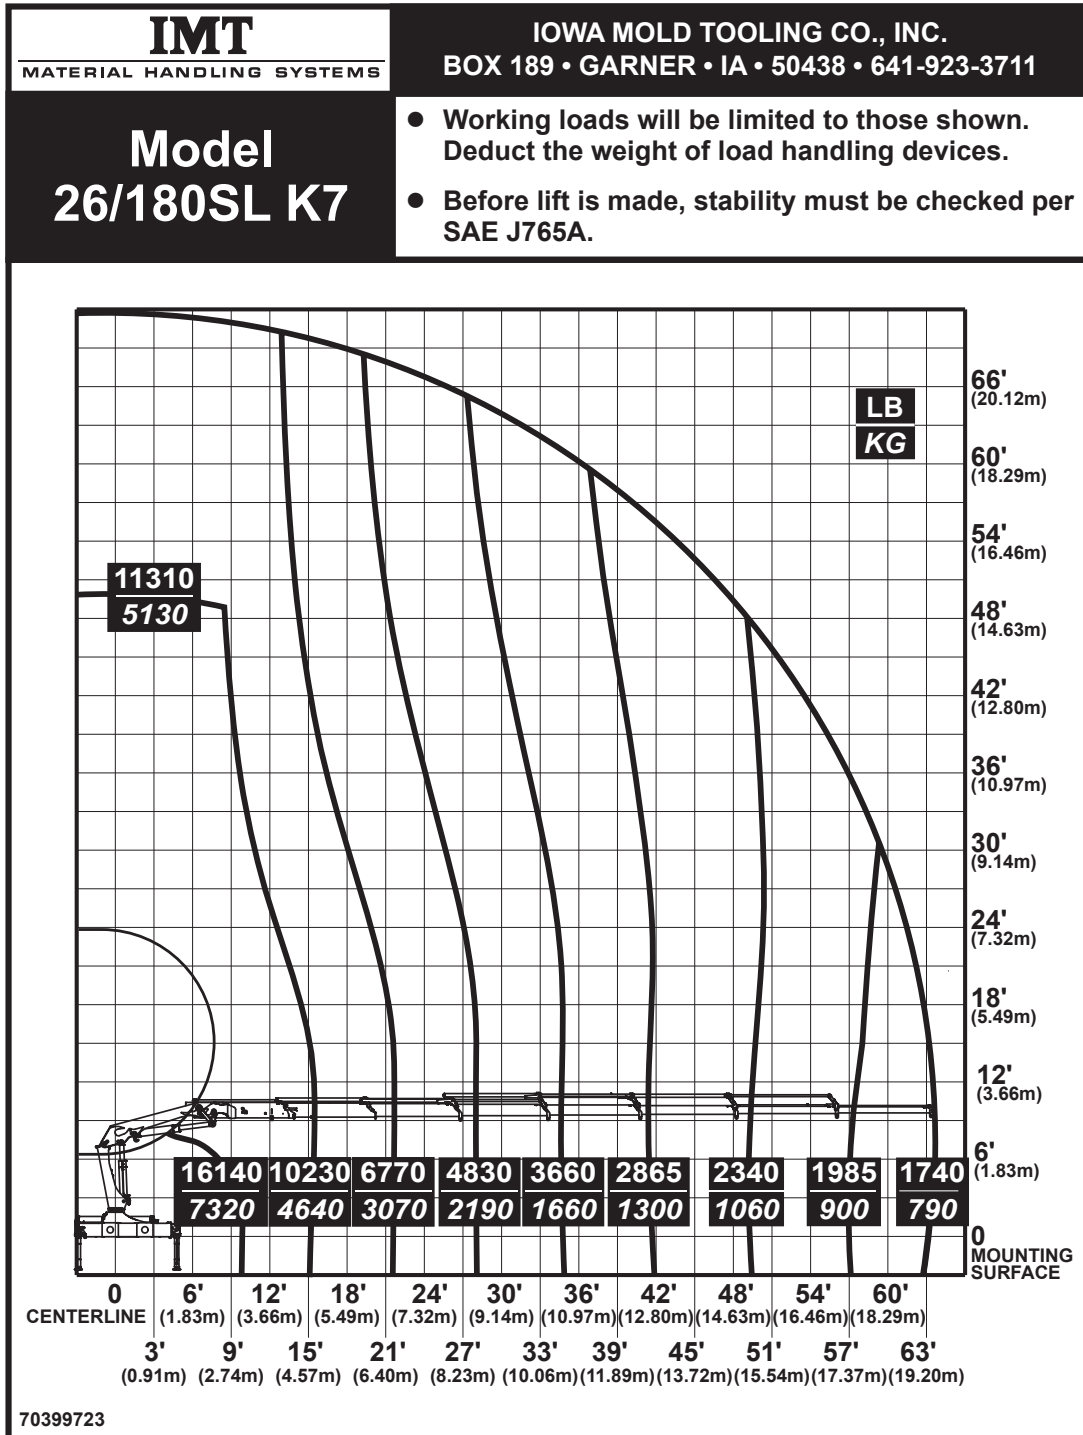


26/180SL Capacity Chart K8

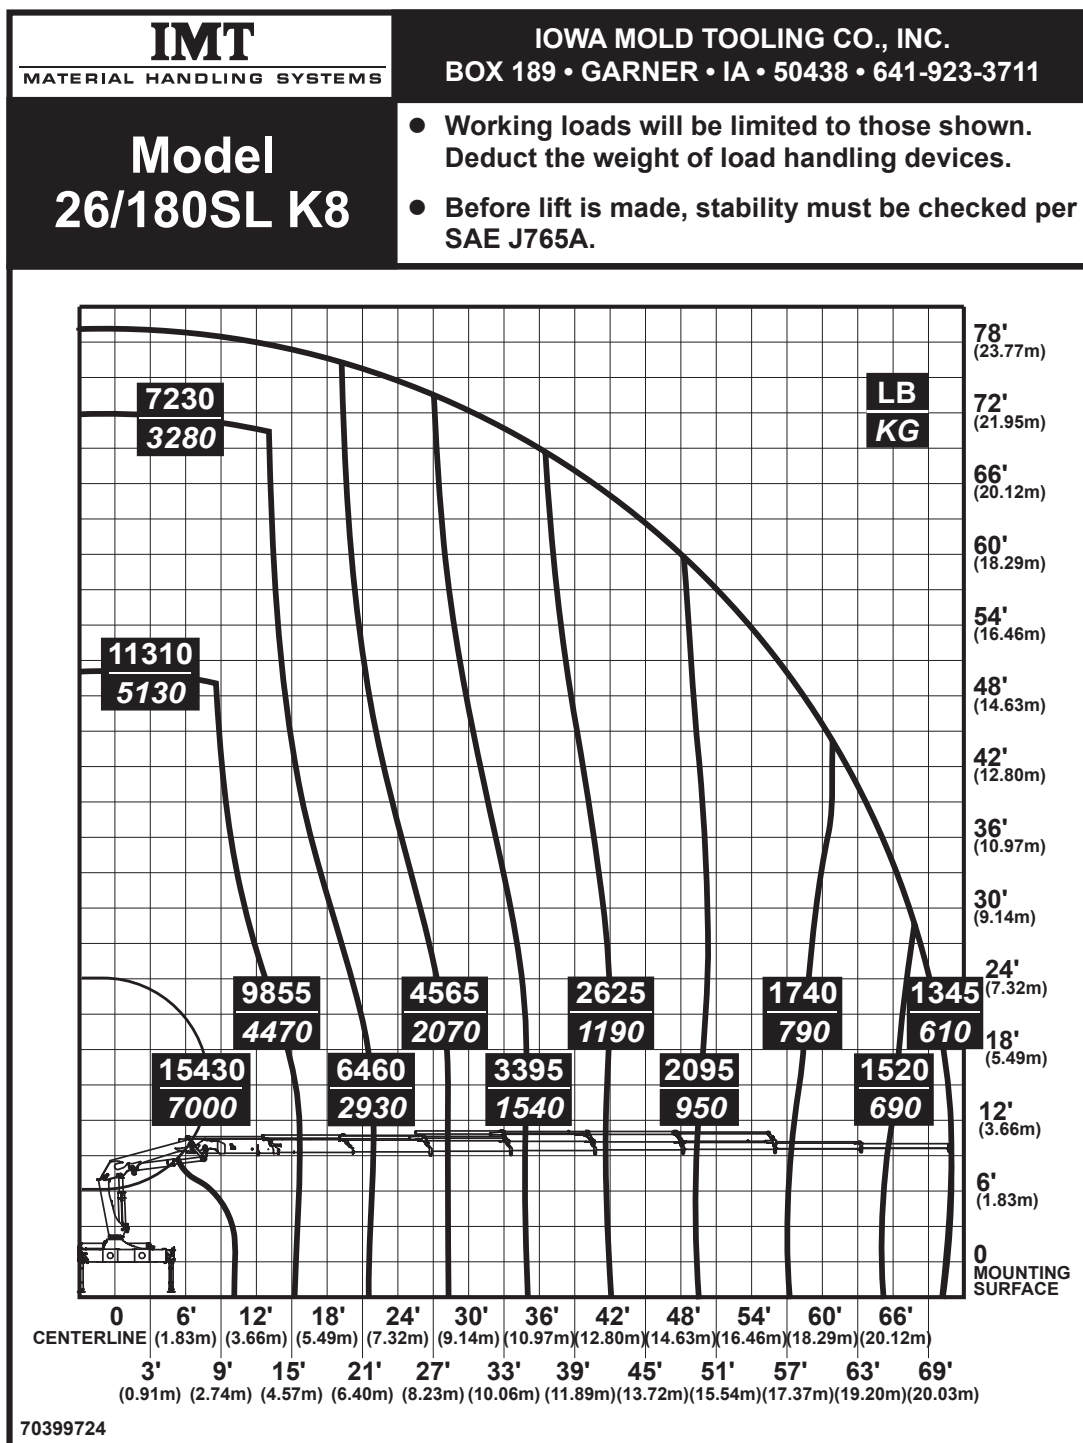

70399724

26/180SL Capacity Chart K2 - K8

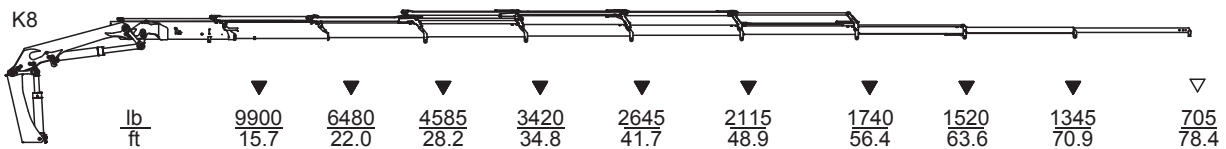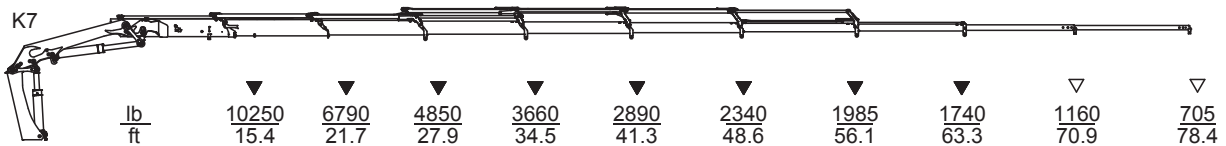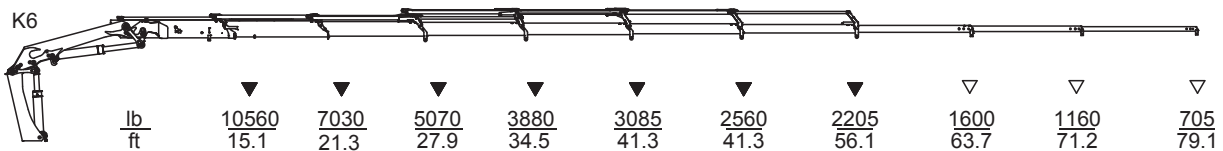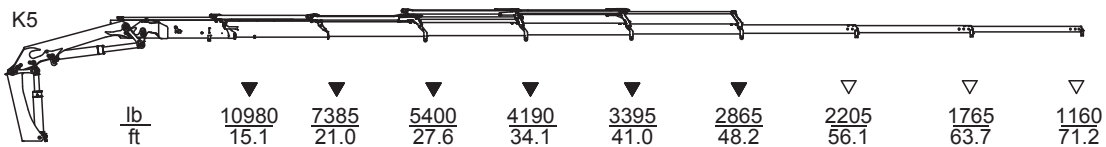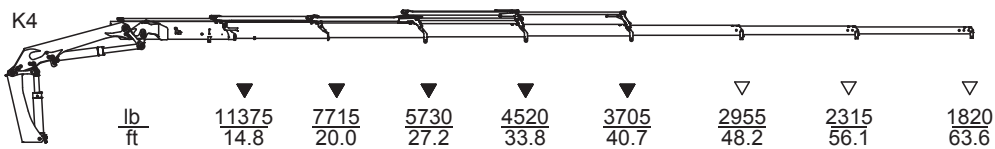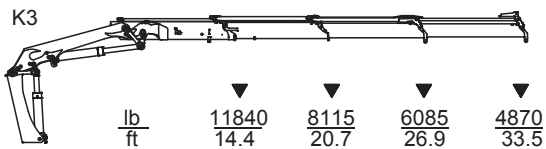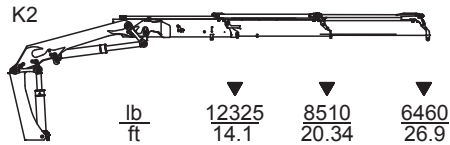

- ▽ Lifting capacity with man. extensions
 ▼ Lifting capacity without man. extensions


This Page Left Blank Intentionally

CHAPTER 7


22/153SL, 24/169SL, 26/180SL Dimension Sketches**In this Chapter**

Dimension Sketch	50
Slewing Radius	51
Truck-Mounted Loader	52
Lifting at Column	53
Fixed Stabilizer Legs	54
Fixed Stabilizer Legs	55
Swing-up Stabilizer Legs 20° - 60° (Manual)	56
Swing-up Stabilizer Legs 20° - 60° (Manual)	57
Swing-up Stabilizer Legs 180° (Manual + Hydraulic)	58
Swing-up Stabilizer Legs 180° (Manual + Hydraulic)	59
TS Top Seat (RC)	60
TS Top Seat (HC Linear)	61
TS Top Seat (Danfoss X)	62
TS Top Seat (HC X)	63
Ladder for TS	64
Winch	65
Winch	66
Stand-Up Platform (Std)	67
Stand-Up Platform (Valve Control)	68
Internal Hose Routing K2-K6	69
Extra Valves K7,K8	70
Stowed in Truck Body	71
Centers of Gravity	72

Dimension Sketch


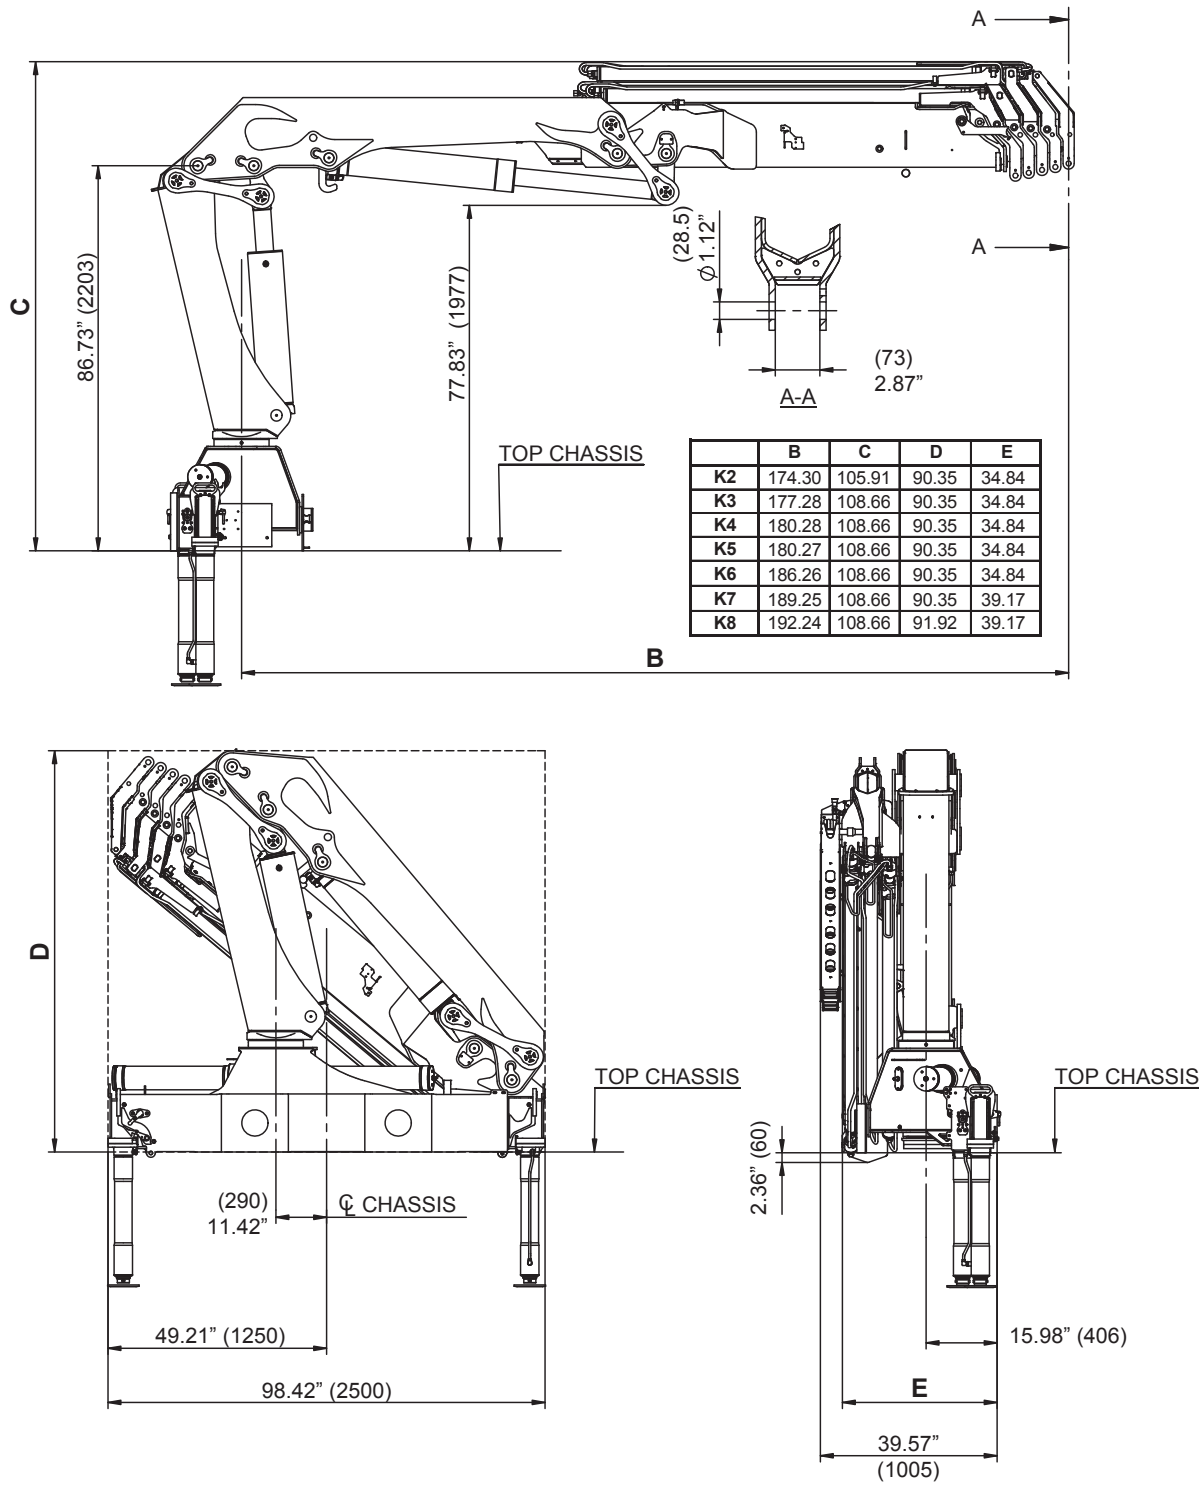


Slewing Radius

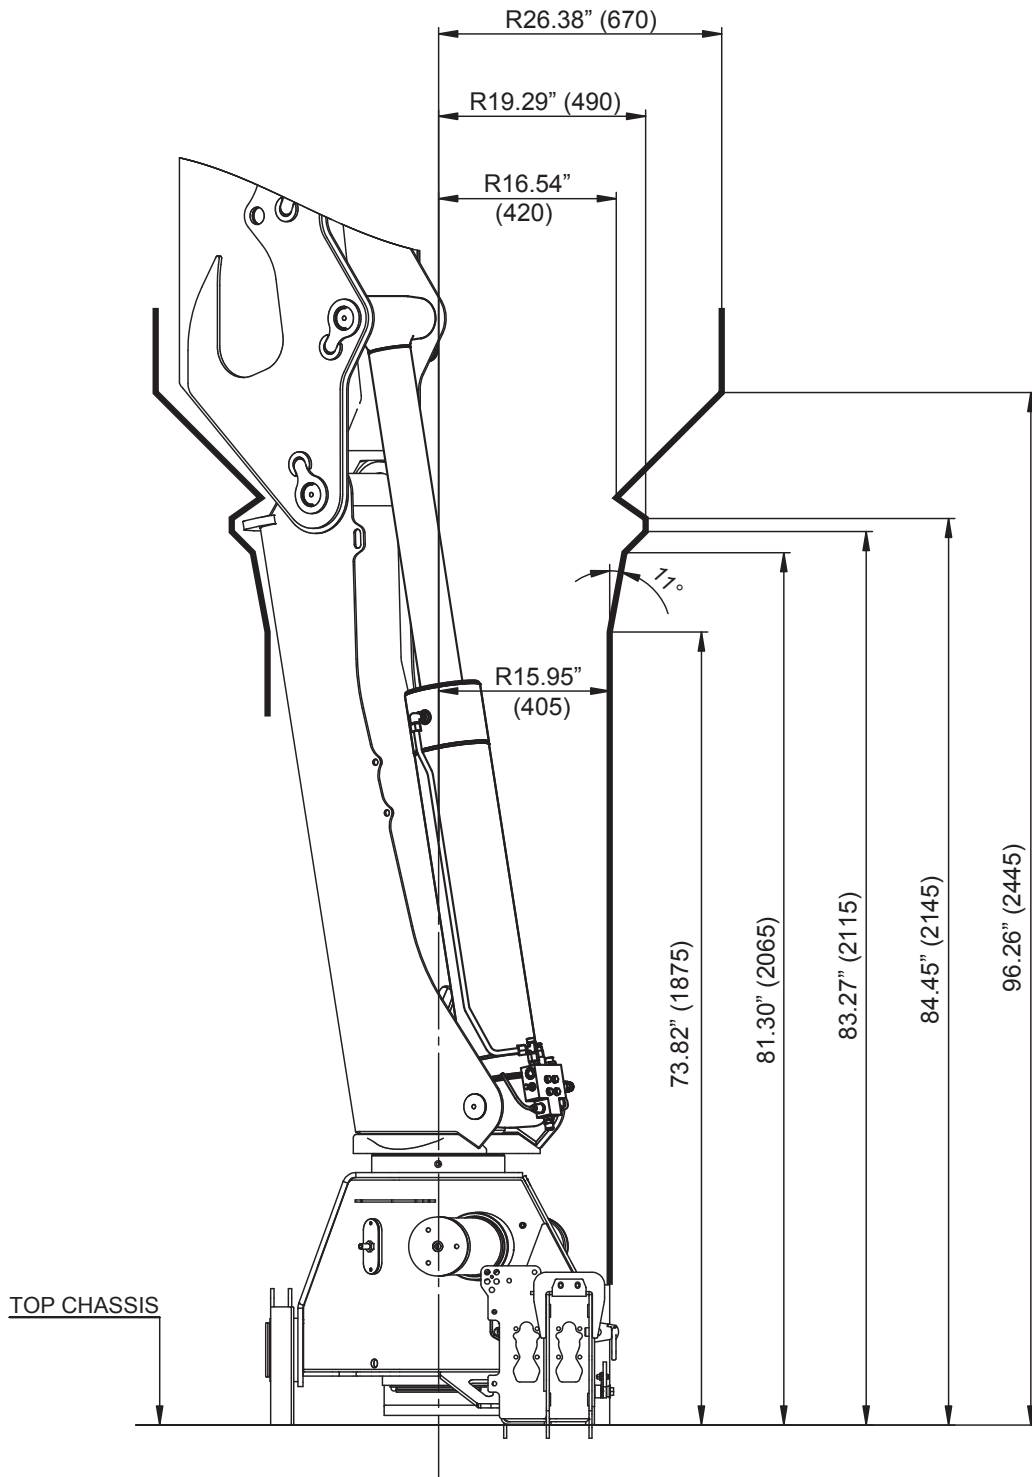


Truck-Mounted Loader

Mounting kit 8 x M24x2 bolts

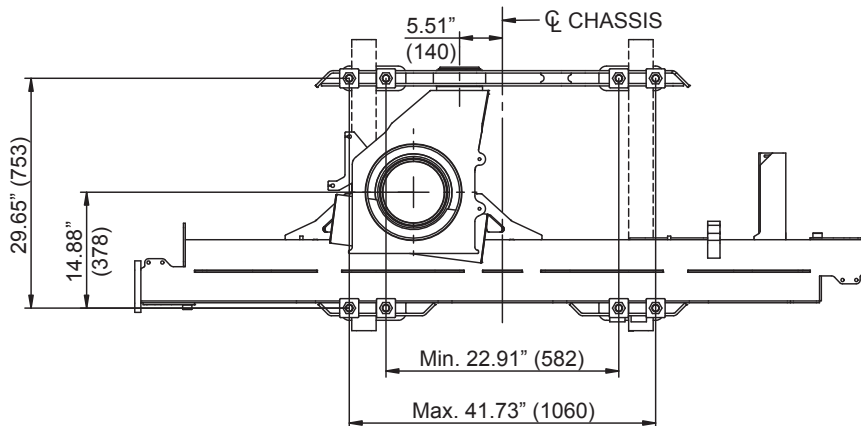


Notes:



- 1) Values dictated by strength considerations.
- 2) Drill hole when assembling
- 3) As regards installation - please see IMT Installation Manual
- 4) Mounting kits or spare parts - please see the Spare Parts Catalogue of the individual loader




See note 2)



Mounting kit 3 x M33x2 bolts + 1 x M30x2 bolts

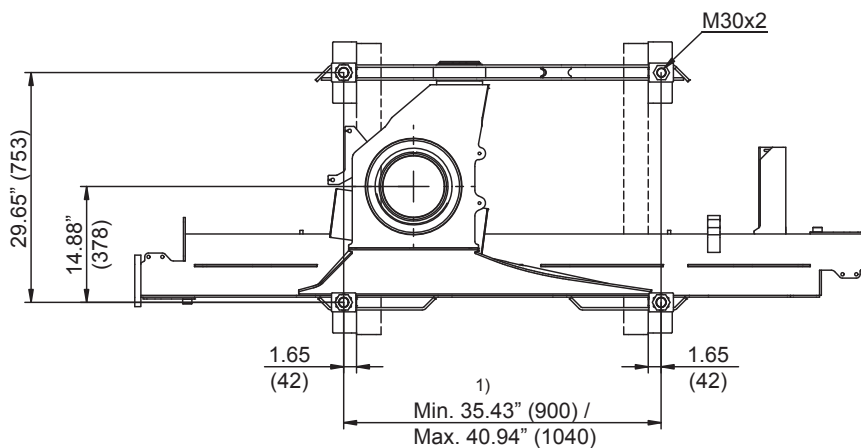


Lifting Height at Column

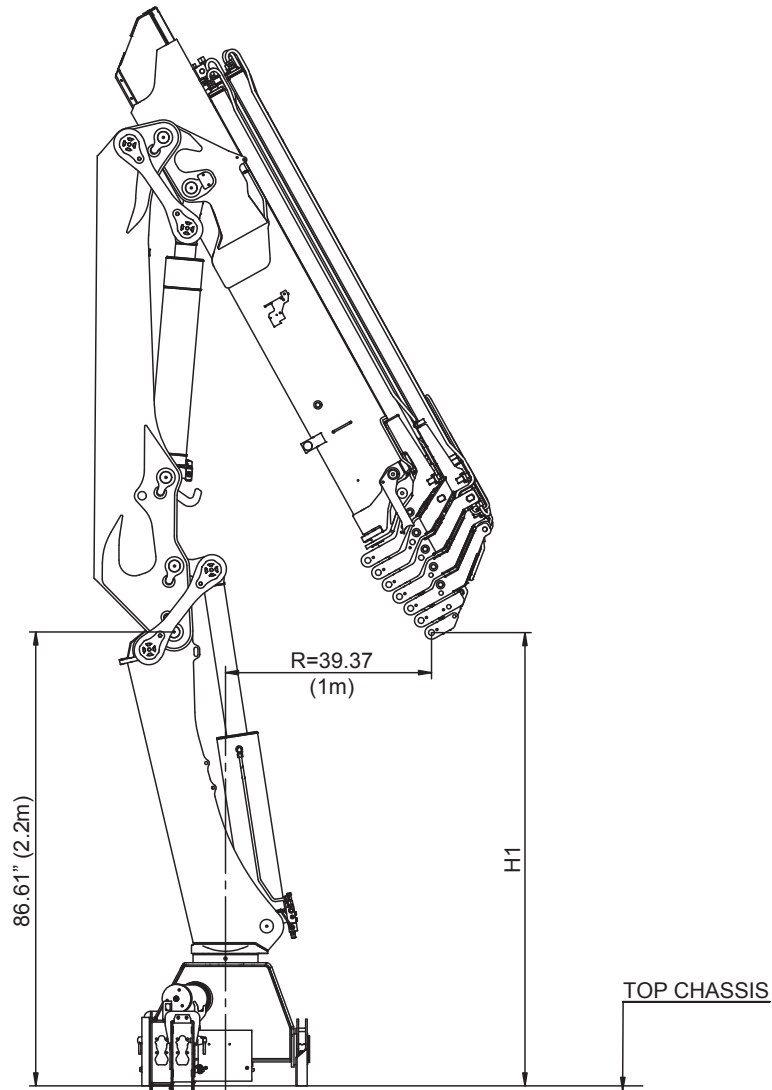


	H1	H1
K2	2.74m	107.87"
K3	2.65m	104.33"
K4	2.56m	100.79"
K5	2.47m	97.24"
K6	2.38m	93.70"
K7	2.29m	90.16"
K8	2.21m	87.01"


Fixed Stabilizer Legs

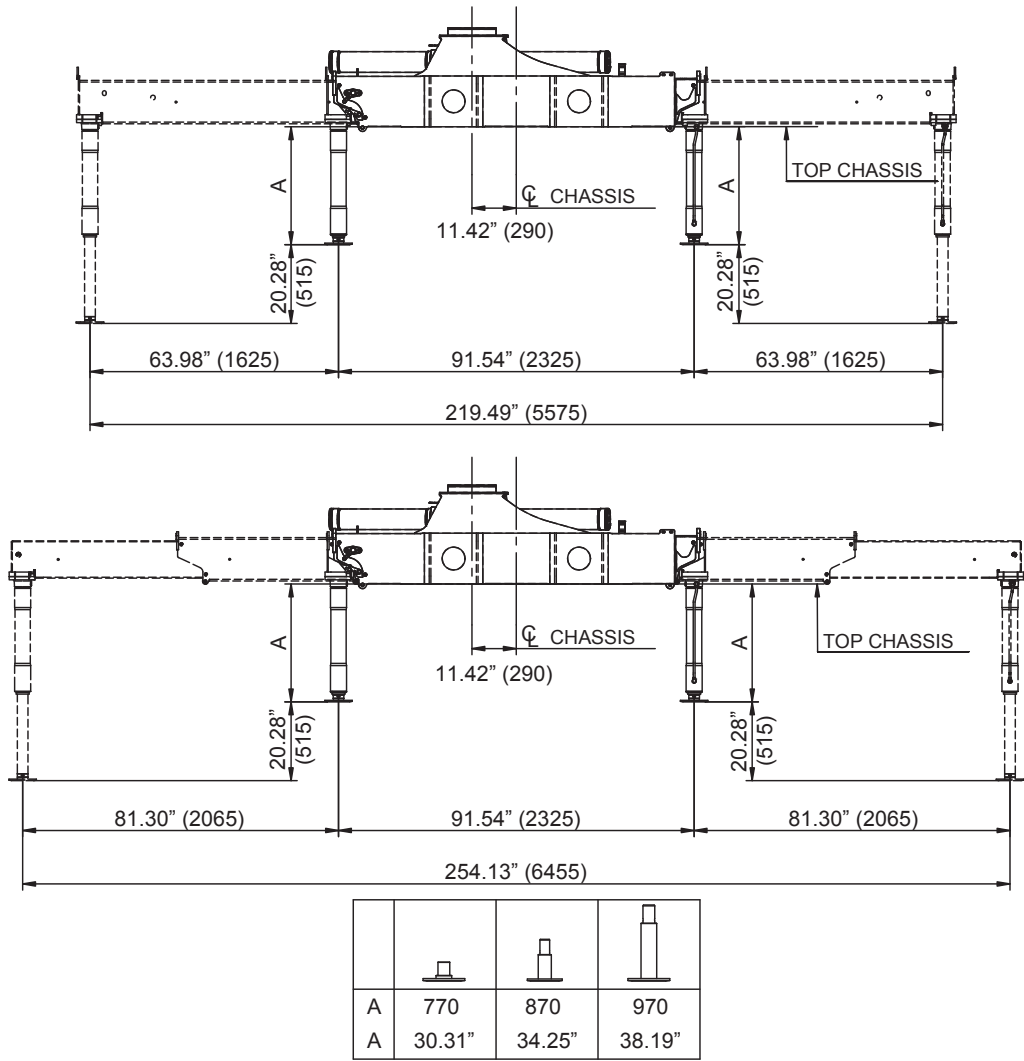



Støttebenscylinder, kort udførelse

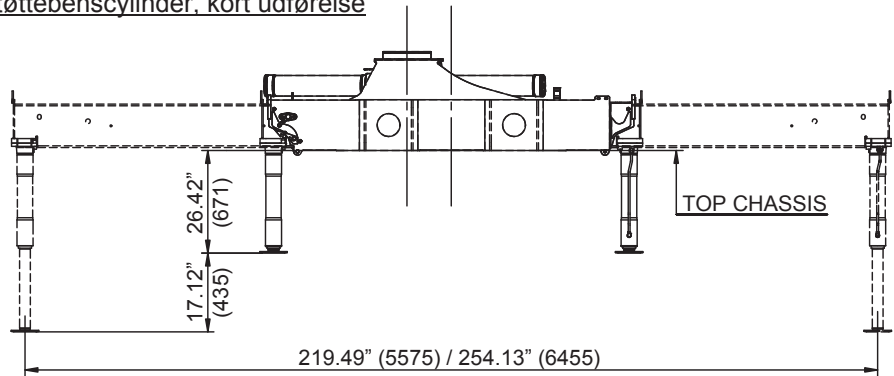


Fixed Stabilizer Legs

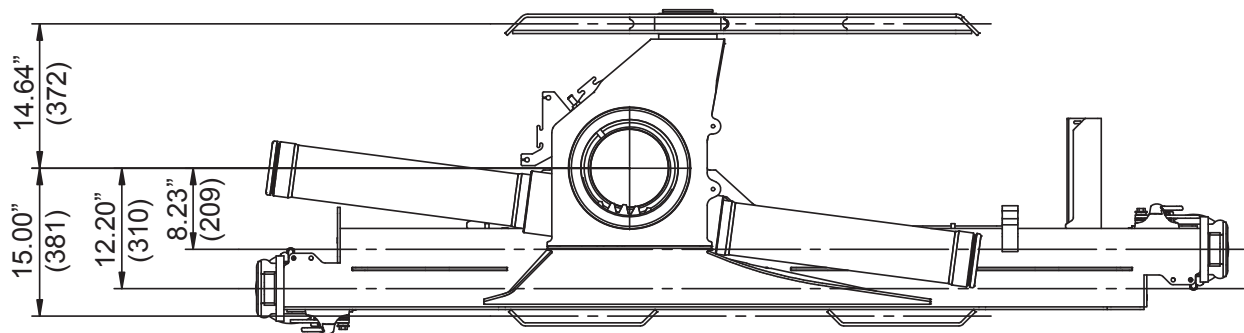


Swing-up Stabilizer Legs 20° - 60° (Manual)

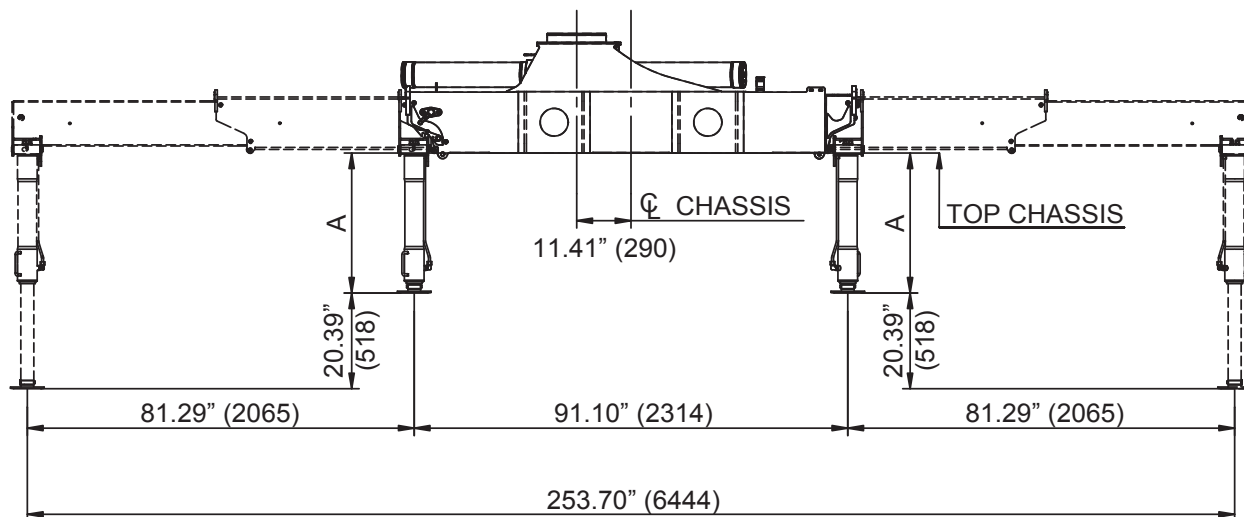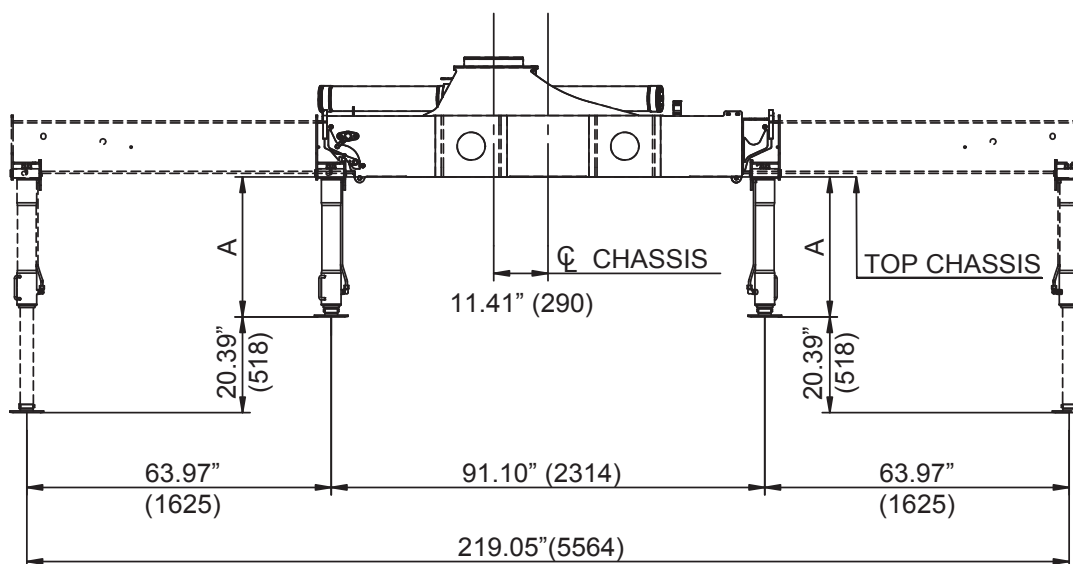


			
A Type R-60°	30.12" (765)	34.05" (865)	37.99" (965)
A Type R-20° (Obsolete)	29.80" (757)	33.74" (857)	37.68" (957)

Swing-up Stabilizer Legs 20° - 60° (Manual)

Type R-60°

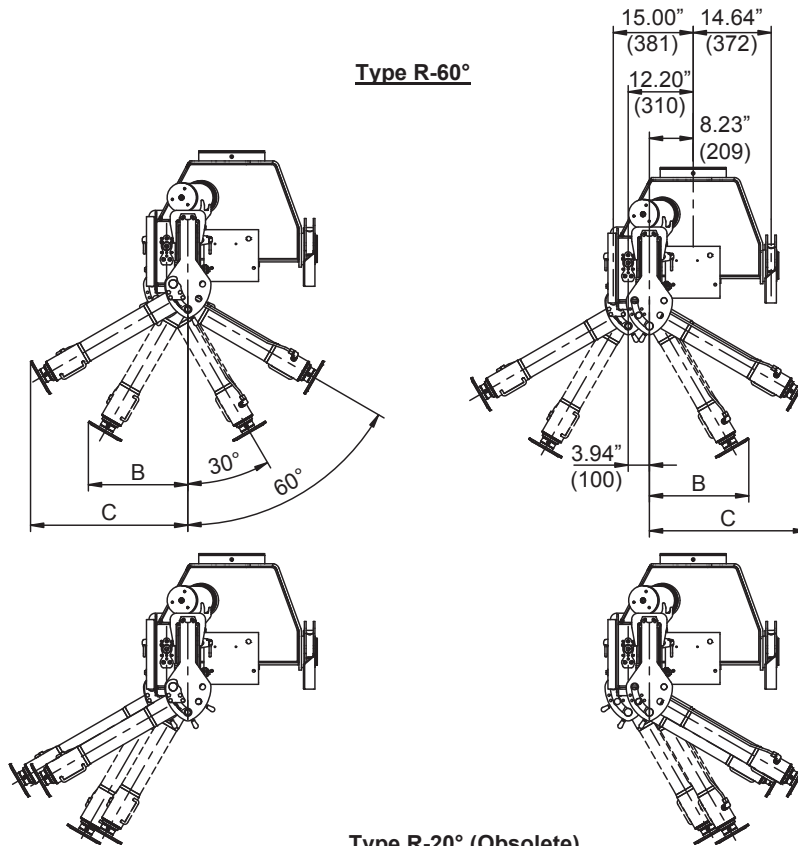


Type R-20° (Obsolete)

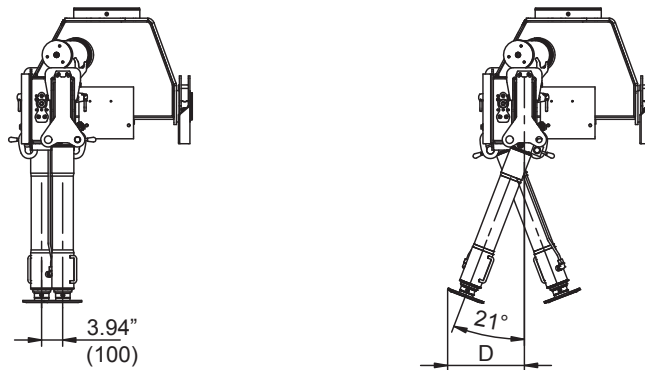


			
B	18.66" (474)	20.63" (524)	22.60" (574)
C	29.53" (750)	32.91" (836)	36.34" (923)
D	14.41" (366)	15.83" (402)	17.24" (438)

Swing-up Stabilizer Legs 180° (Manual + Hydraulic)

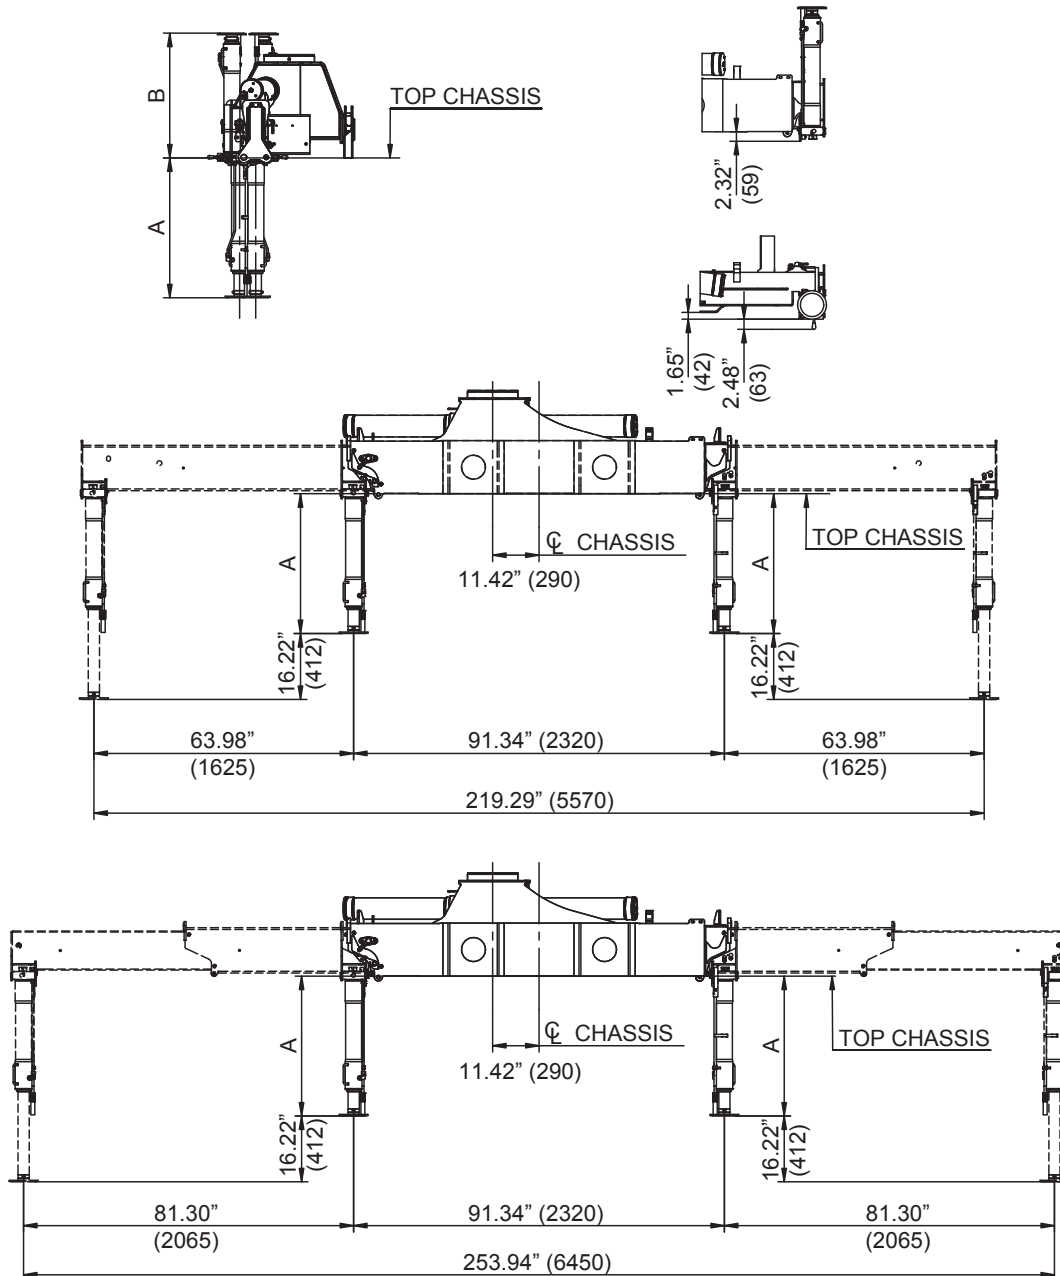


			
A	34.45" (875)	38.38" (975)	42.32" (1075)
B	30.75" (781)	34.68" (881)	38.62" (981)


Swing-up Stabilizer Legs 180° (Manual + Hydraulic)

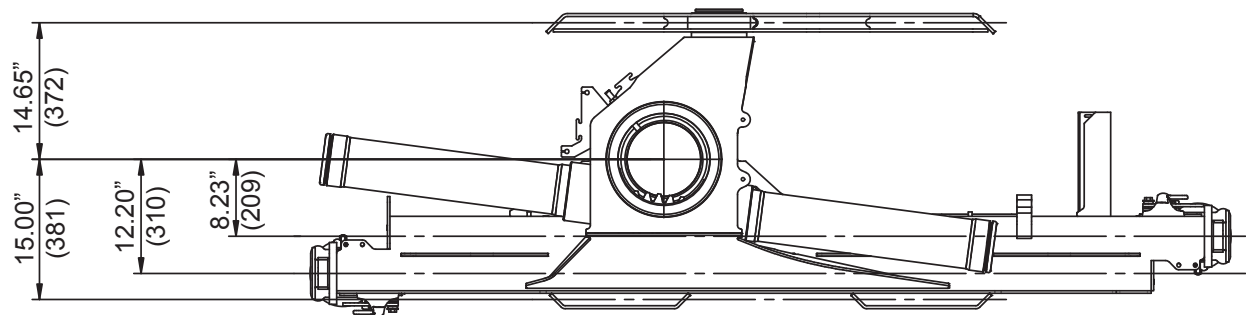


TS Top Seat (RC)

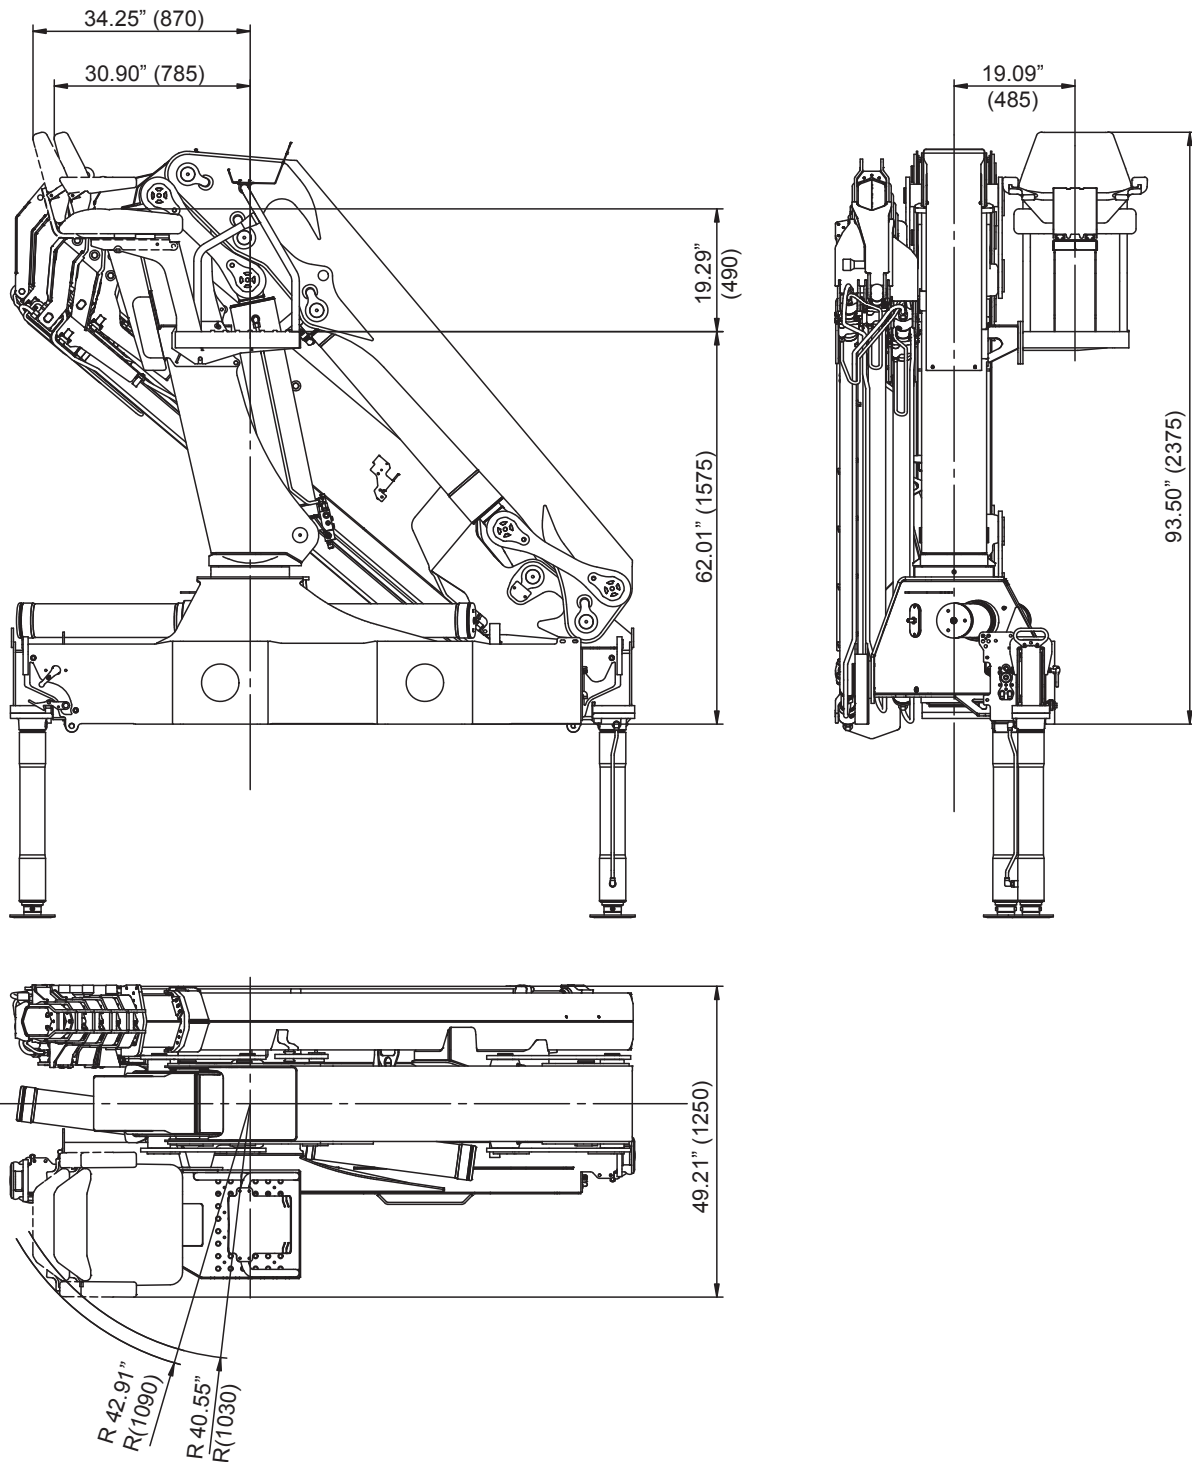


TS Top Seat (HC Linear)

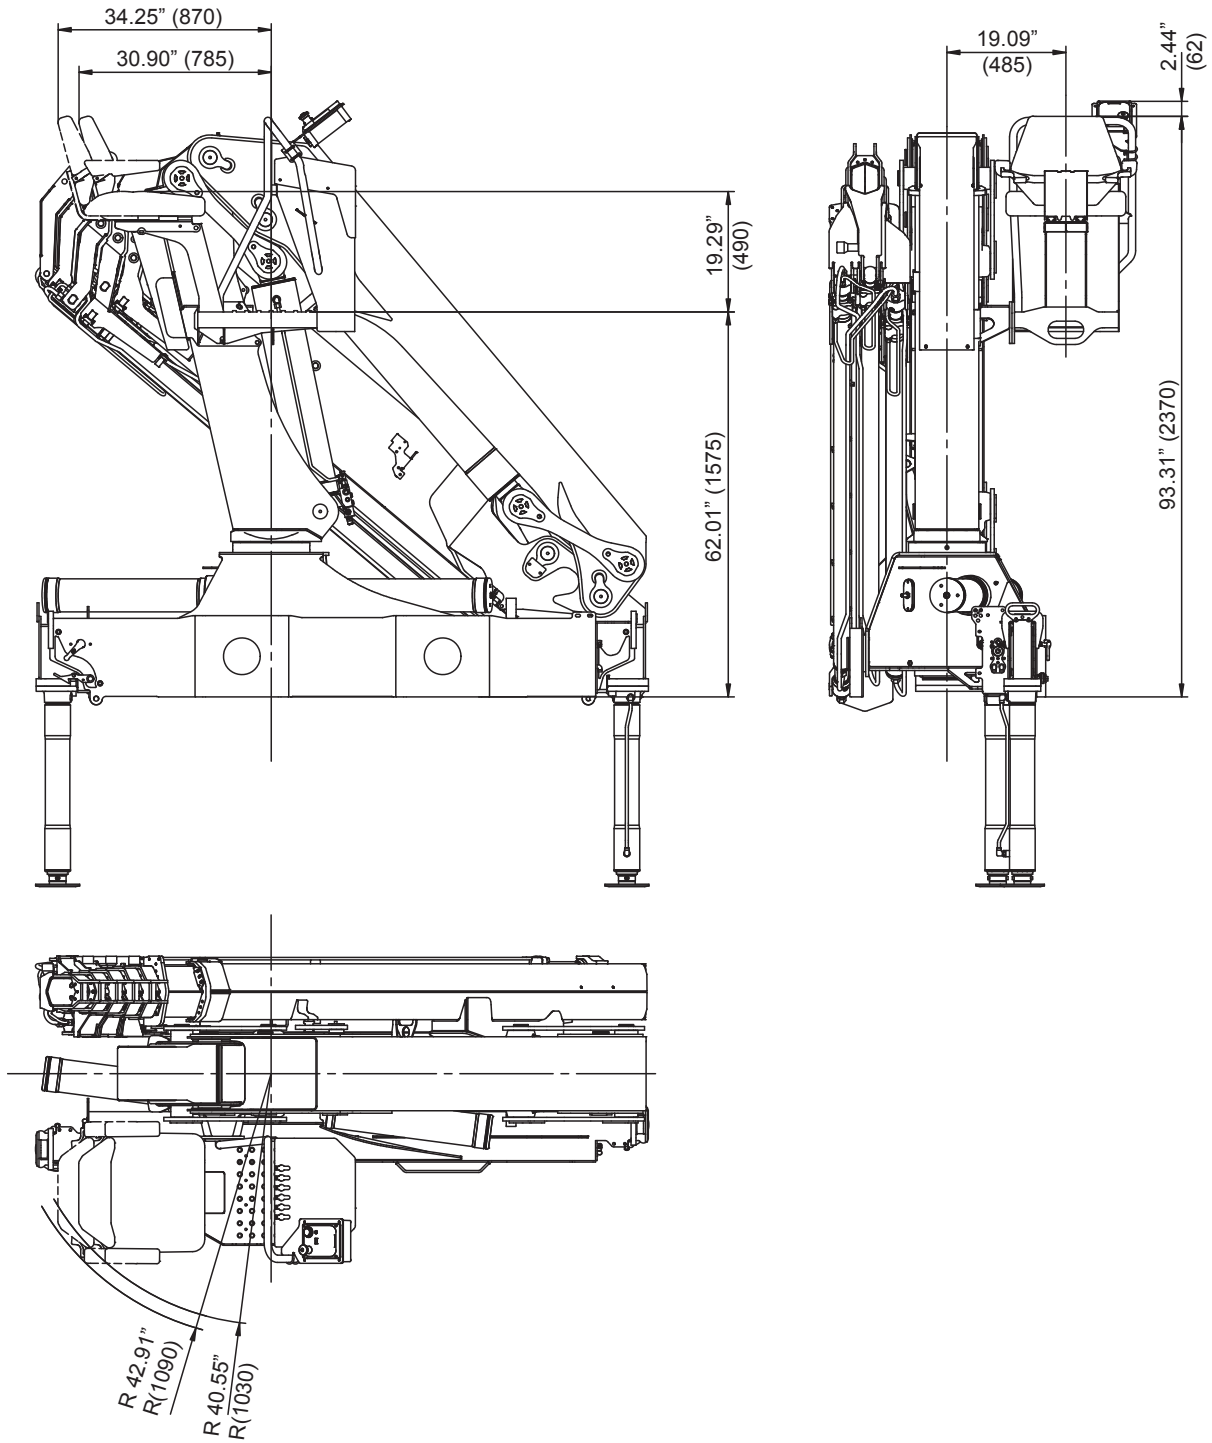


TS Top Seat (Danfoss X)

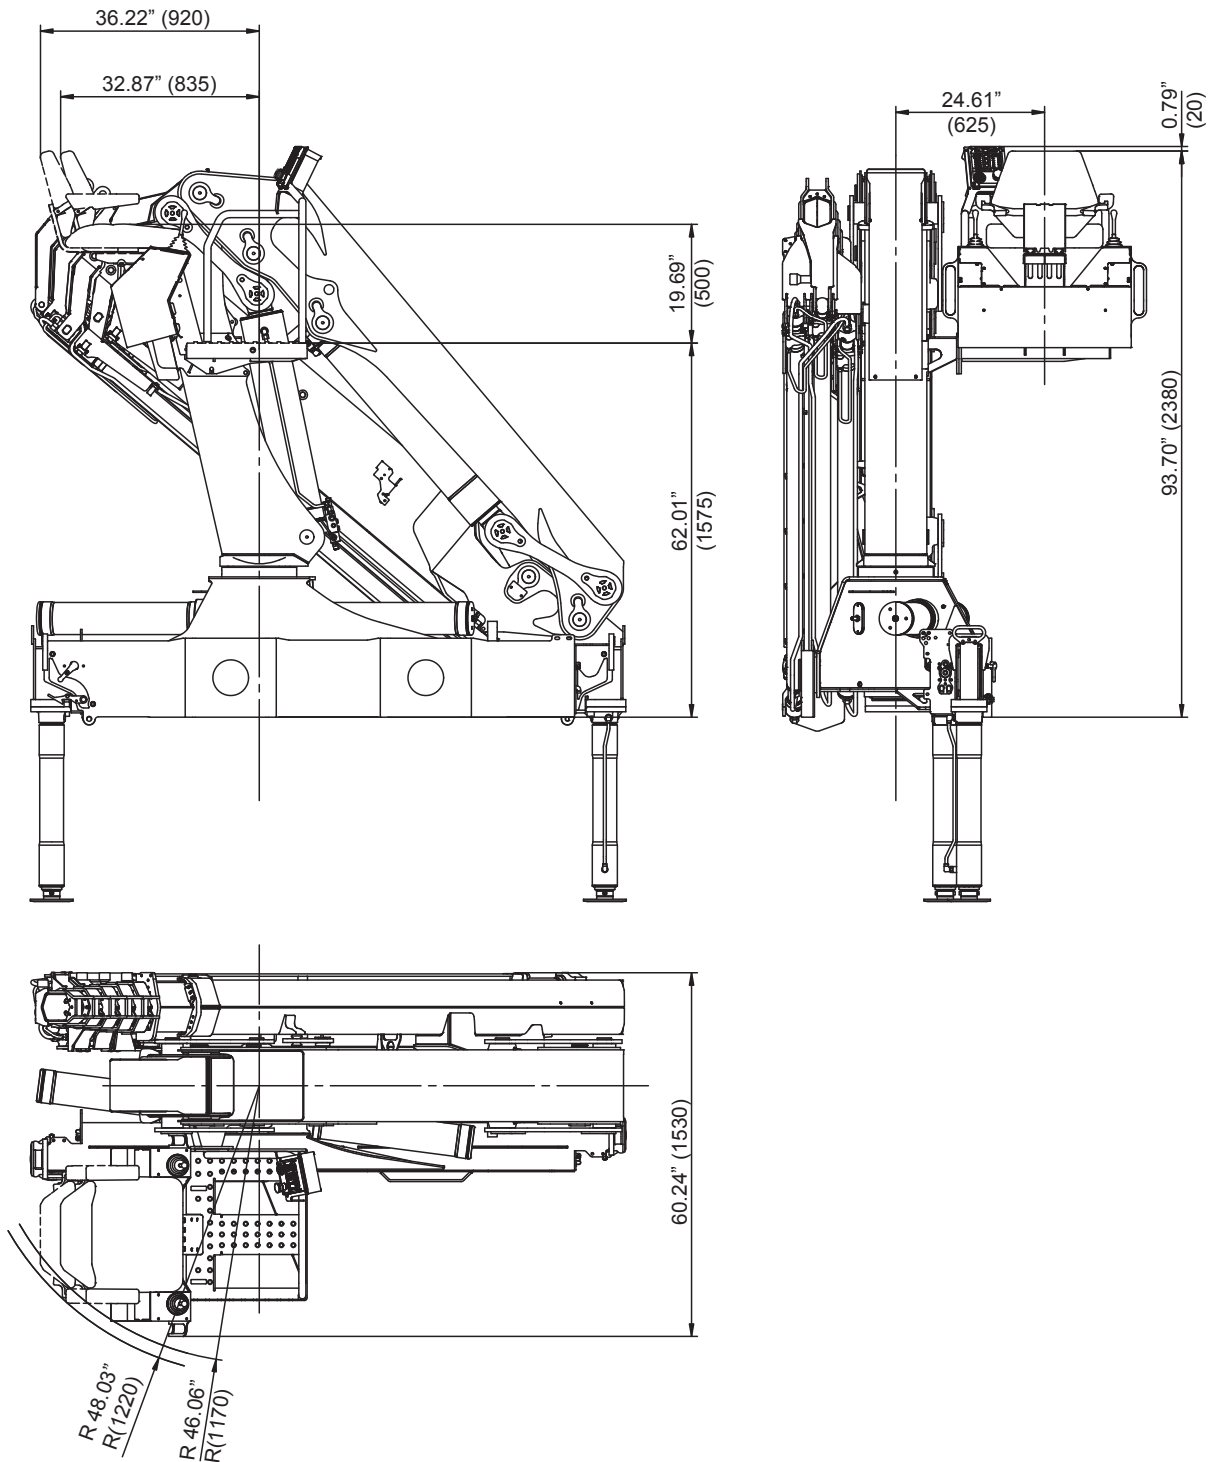

TS Top Seat (HC X)

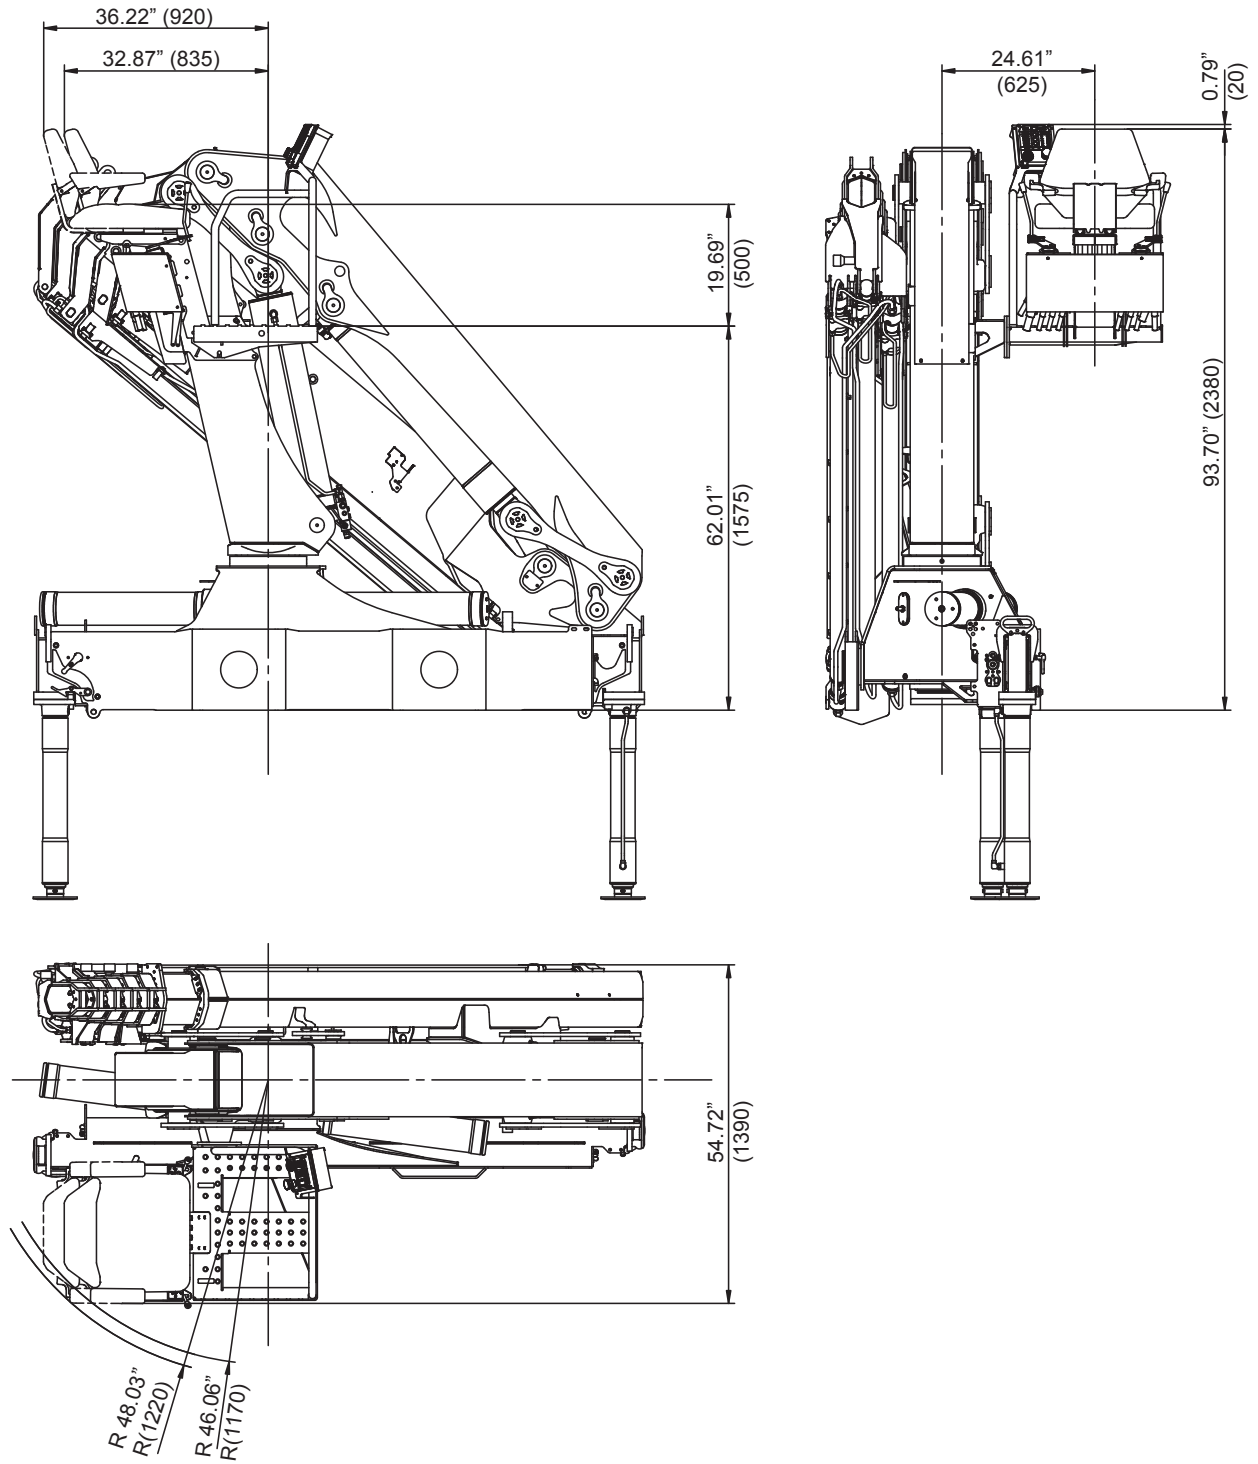

Ladder for TS

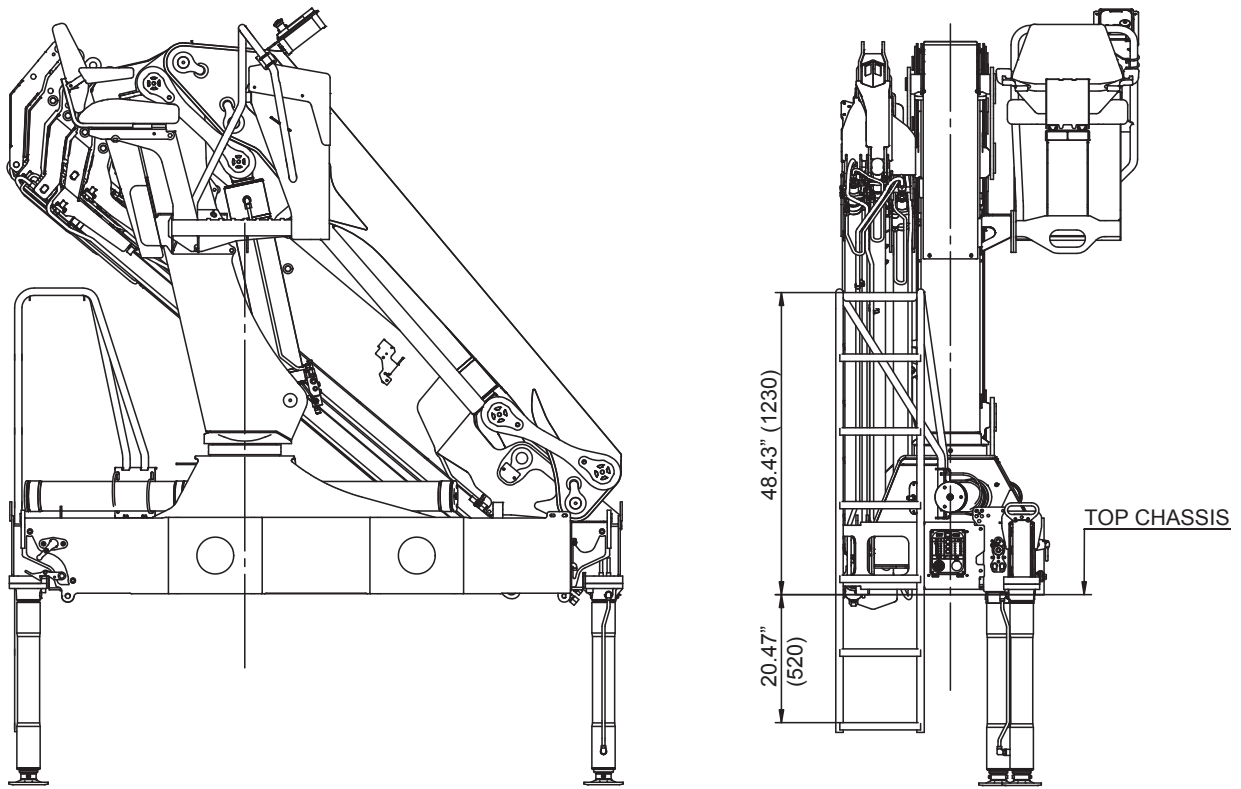

Notes:

- 1) Ladder cannot be used for TS RC
- 2) There is no access to the top seat when the loader is in stowing position





Winch

Performance (at 150 bar):	1.5T winch	1.65tn winch	2.5T winch	2.75tn winch
Max. wire pull – 1st layer	1500kg	3307lb	2500kg	5512lb
Max. wire pull – 2nd layer	1370kg	3020lb	2300kg	5071lb
Max. wire pull – 3rd layer	1260kg	2777lb	2100kg	4630lb
Max. wire pull – 4th layer	1170kg	2579lb	1950kg	4299lb


Wire speed (at 40 l/min.):	1.5T winch	1.65tn winch	2.5T winch	2.75tn winch
Max. wire speed – 1st layer	22 m/min	72 ft/min	24 m/min	79 ft/min
Max. wire speed – 2nd layer	24 m/min	79 ft/min	26 m/min	85 ft/min
Max. wire speed – 3rd layer	26 m/min	85 ft/min	28 m/min	92 ft/min
Max. wire speed – 4th layer	28 m/min	92 ft/min	30 m/min	98 ft/min

Weights:	1.5T winch	1.65tn winch	2.5T winch	2.75tn winch
Tare weight, winch (CE)	65kg	143lb	90kg	198lb
Fixed parts (valve section, brackets, hoses etc.)	50kg	110lb	50kg	110lb
Wire Ø10 x 50 m	30kg	66lb	30kg	66lb
Spare parts, single snatch block	30kg	66lb	30kg	66lb
Spare parts, double snatch block	40kg	88lb	40kg	88lb


Winch

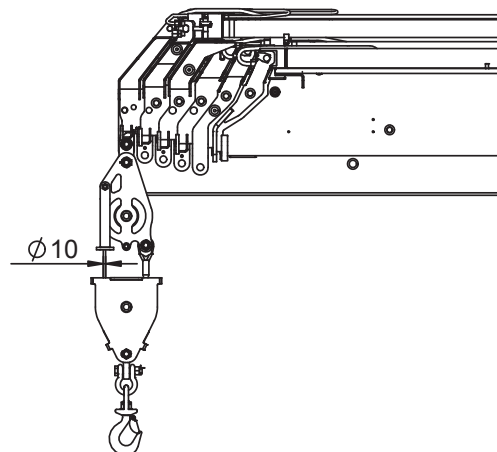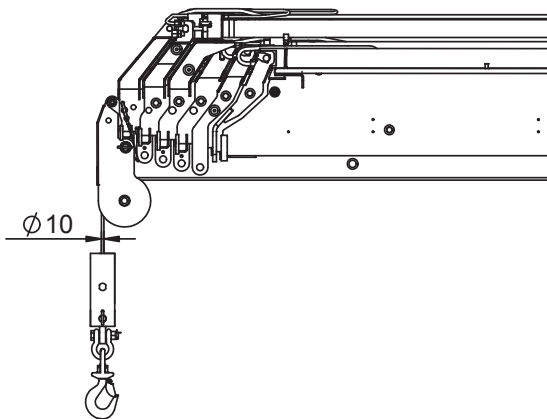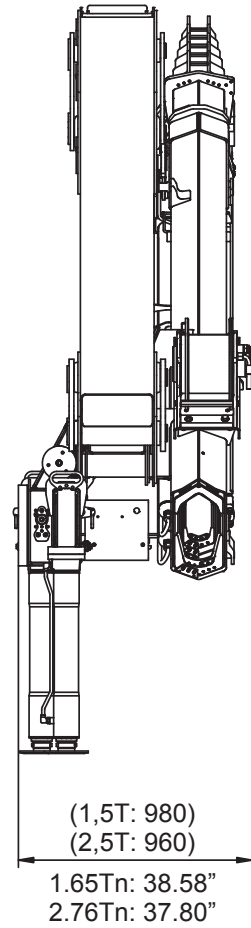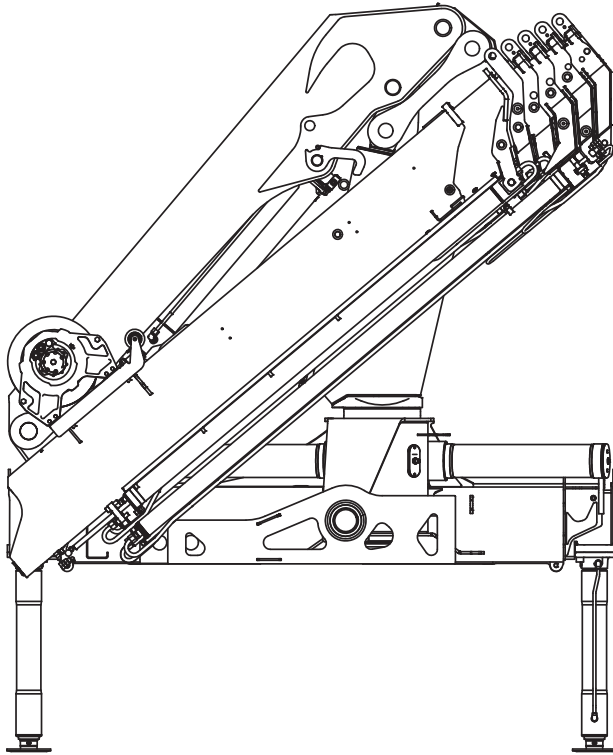




Stand-Up Platform (Std)

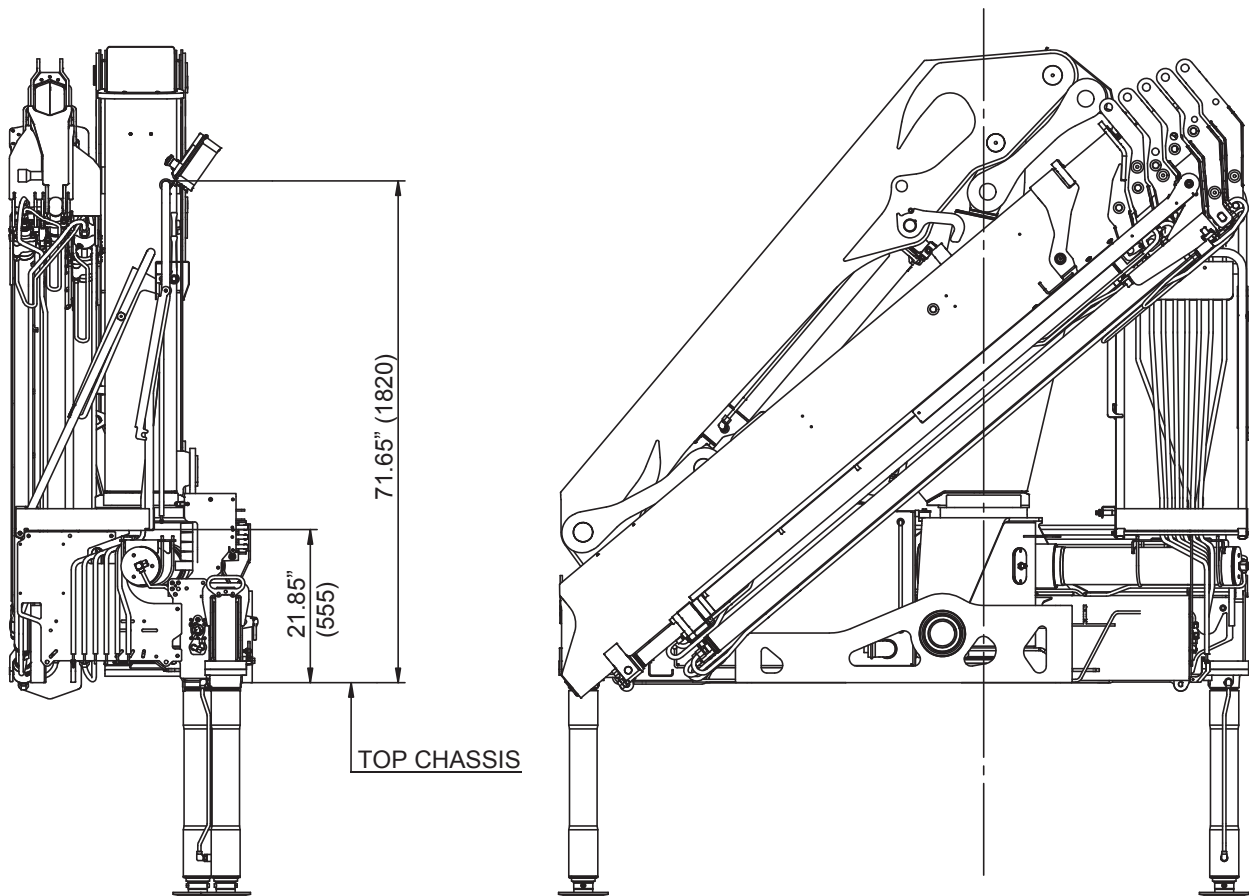





Stand-Up Platform (Valve Control)

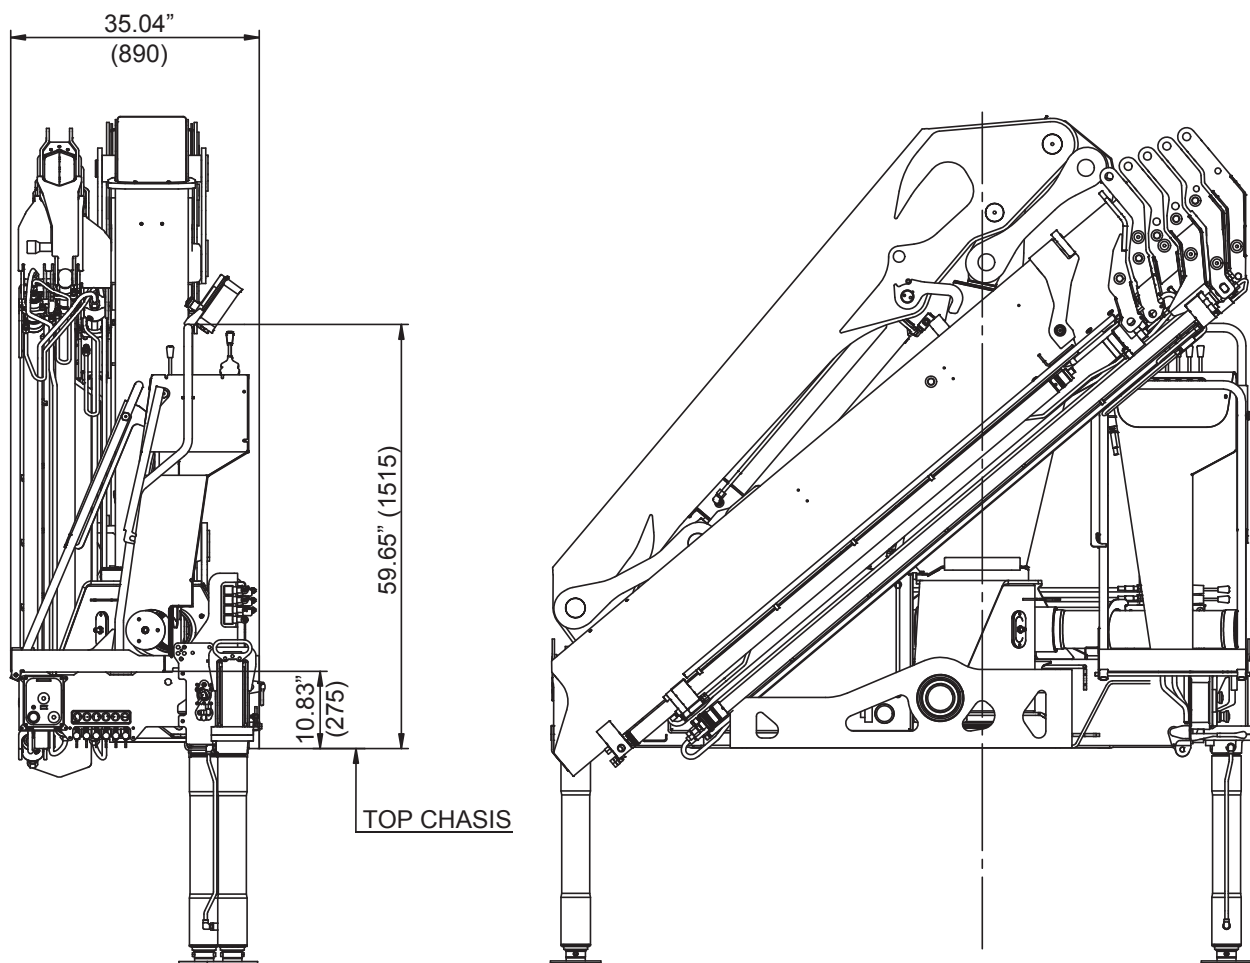



Internal Hose Routing K2-K6

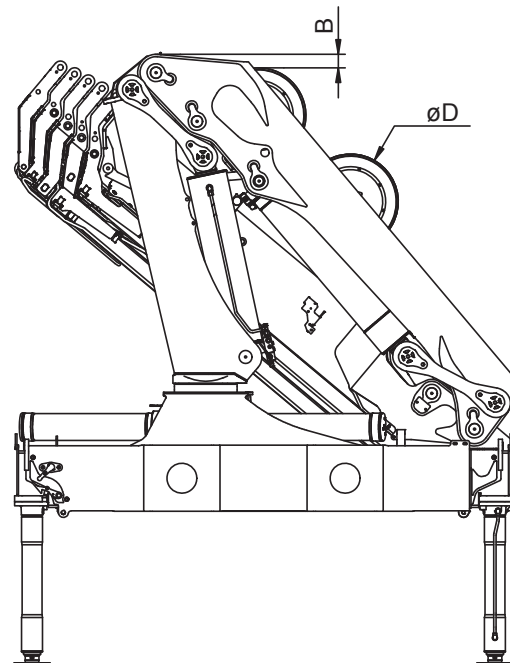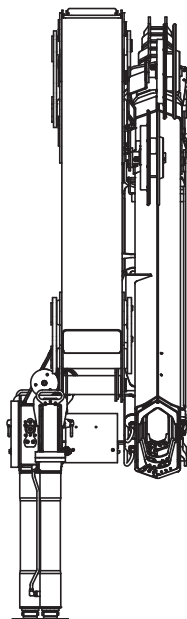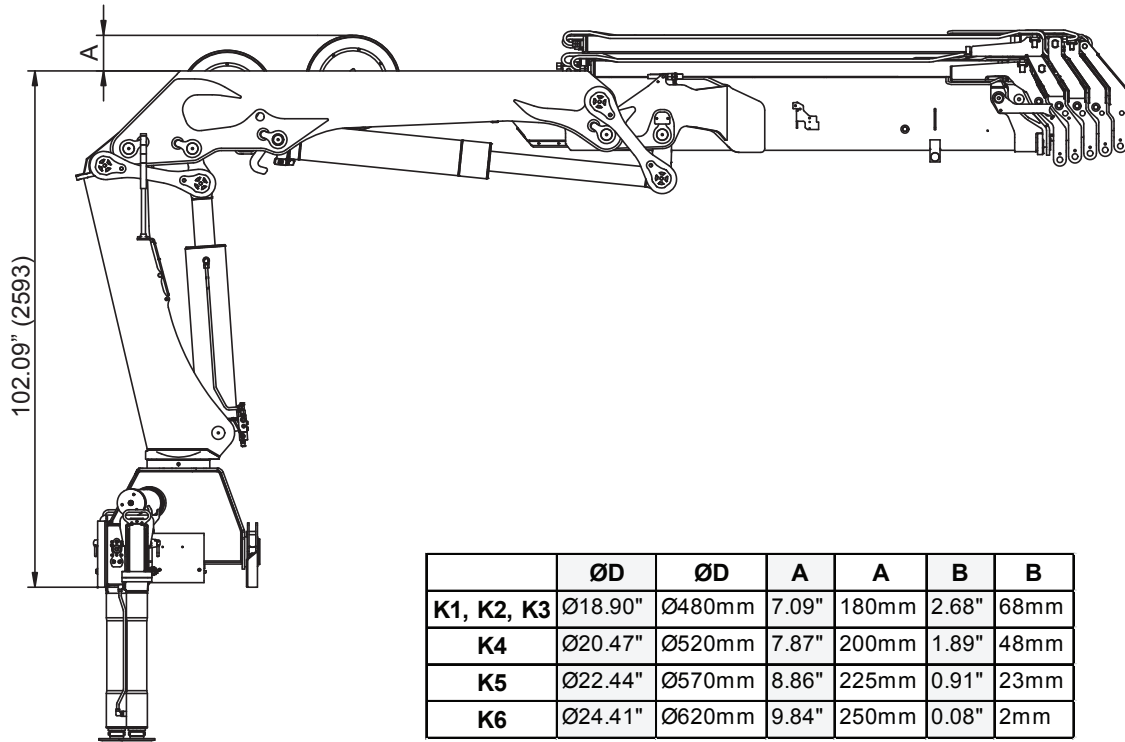


Extra Valves K7,K8

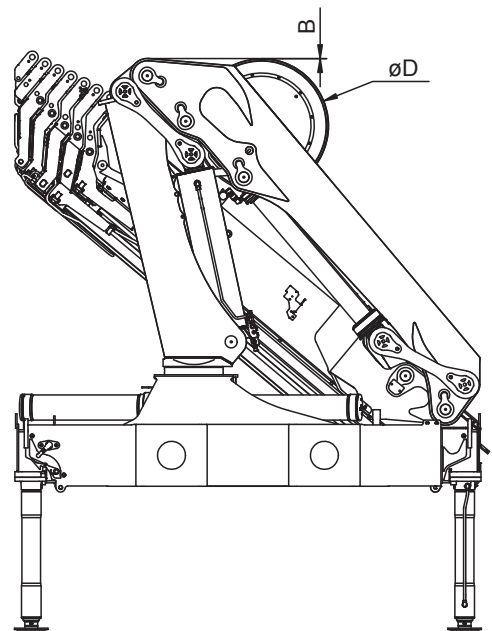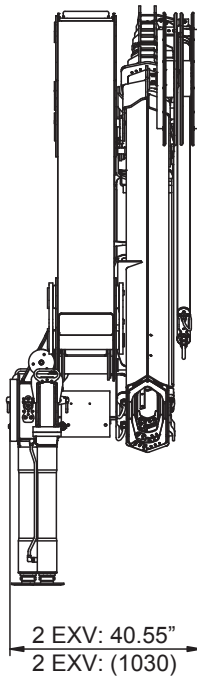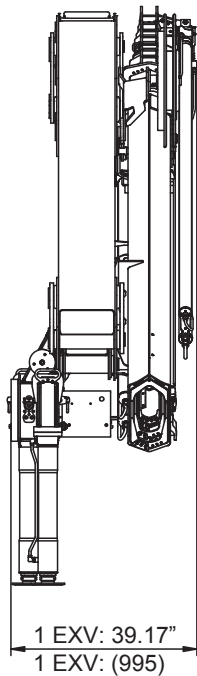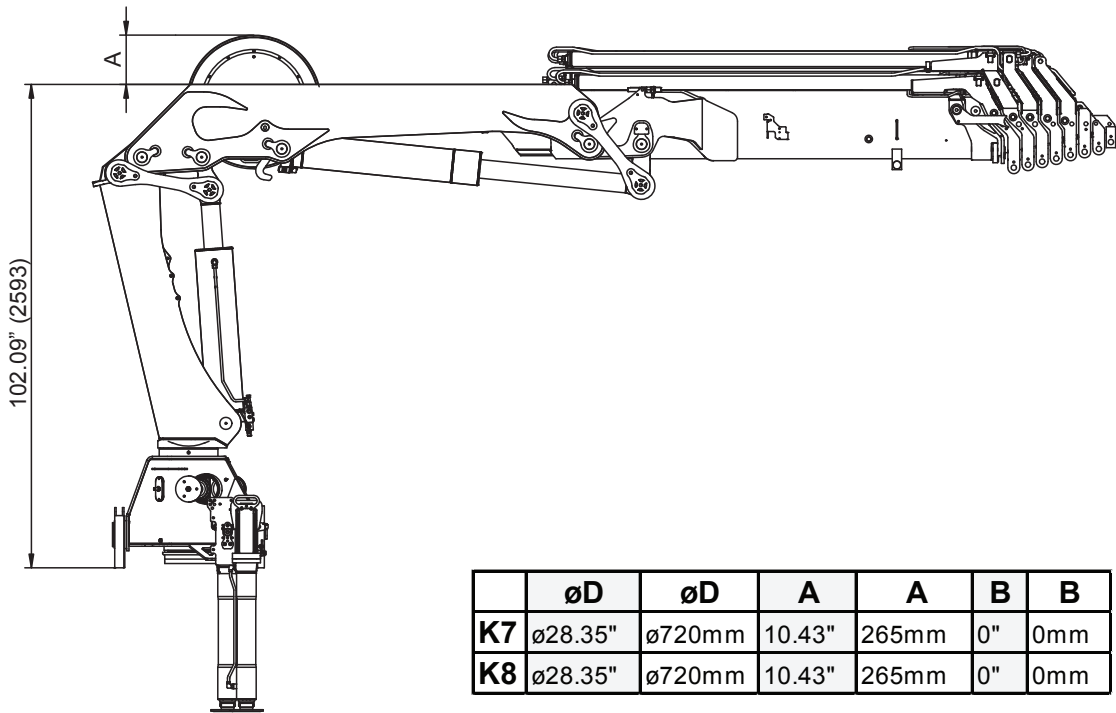

Stowed in Truck Body

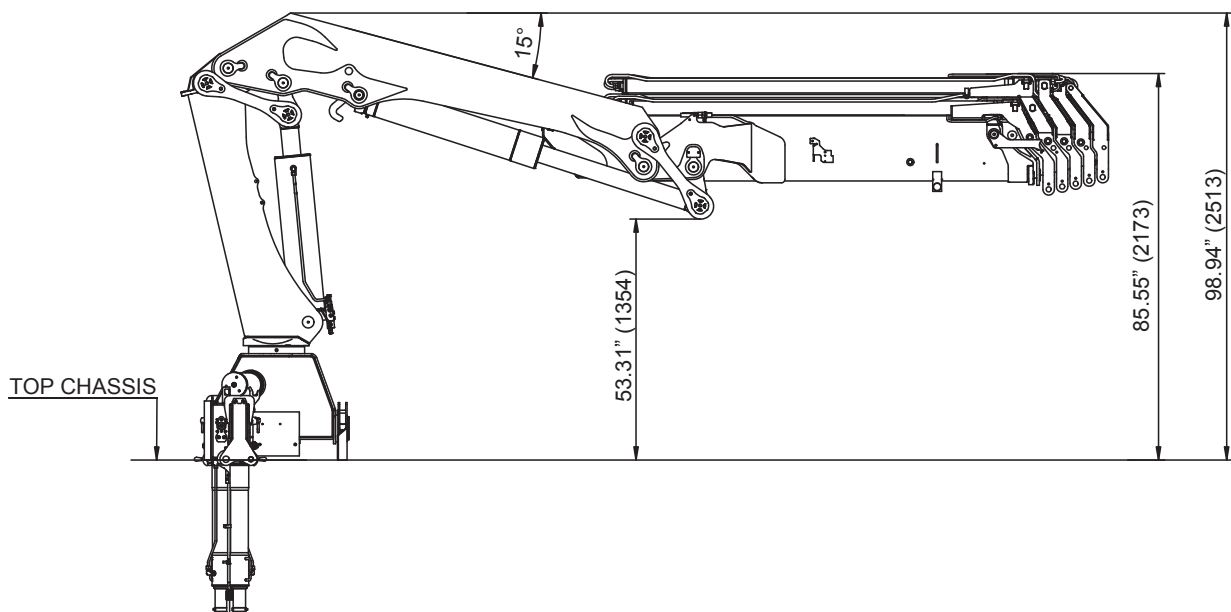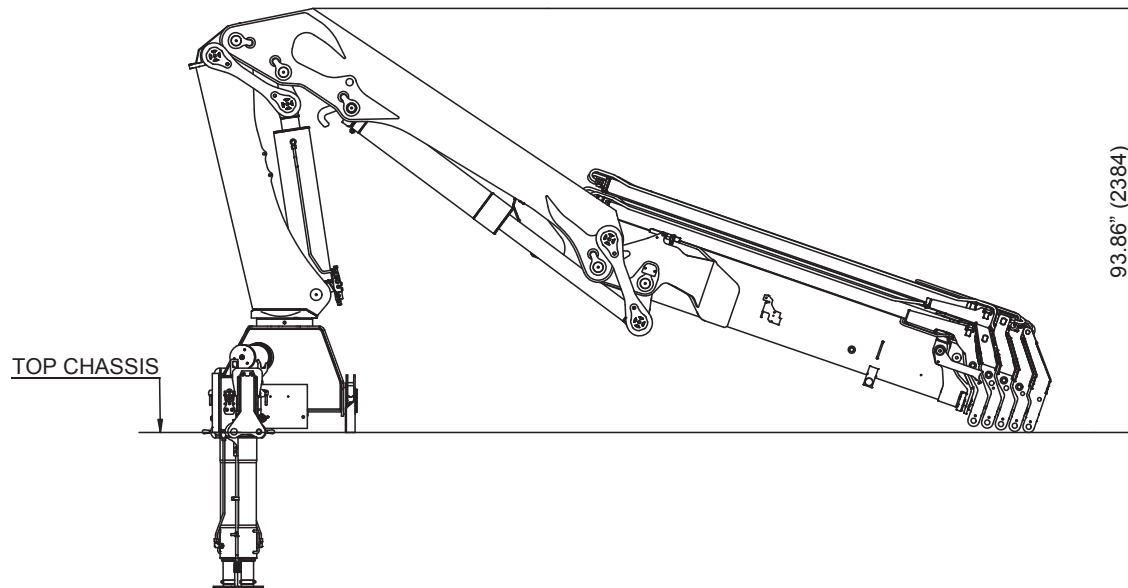

Centers of Gravity

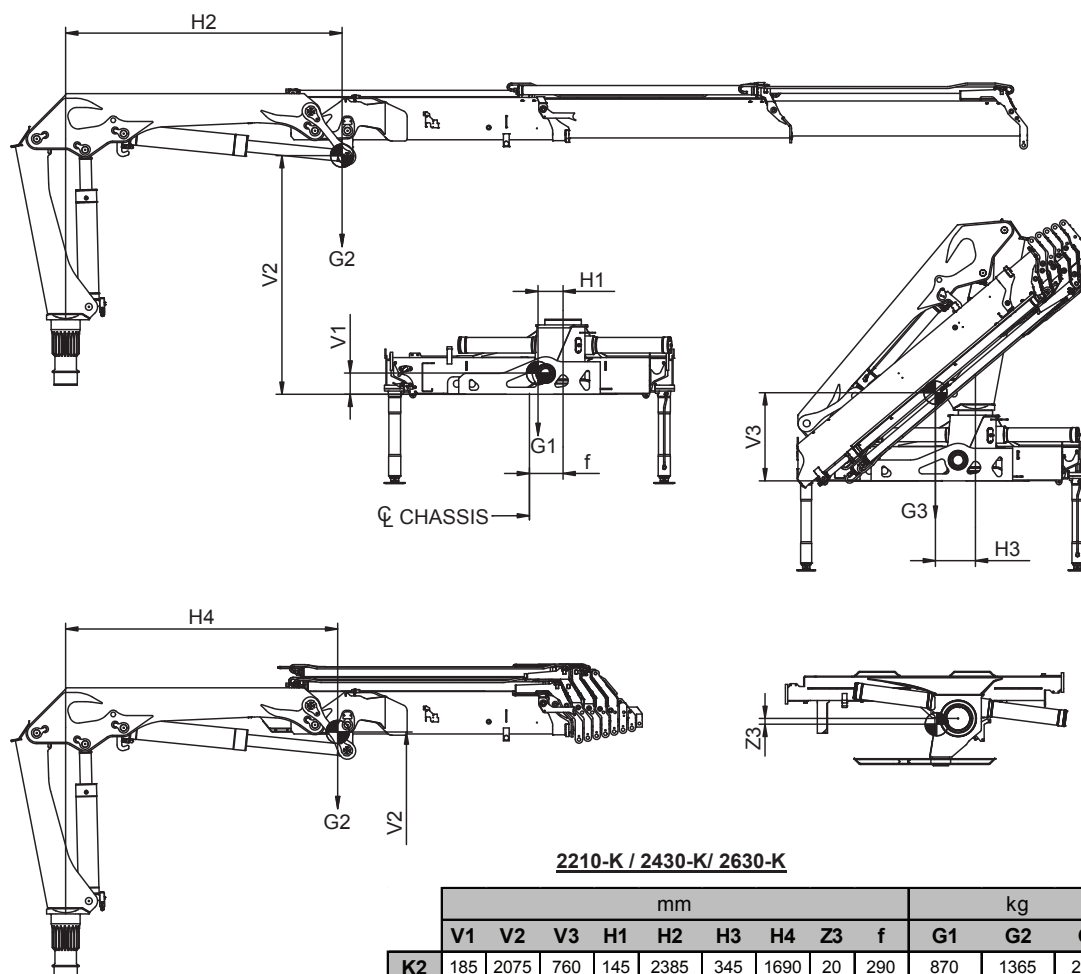

2210-K / 2430-K/ 2630-K

	mm									kg		
	V1	V2	V3	H1	H2	H3	H4	Z3	f	G1	G2	G3
K2	185	2075	760	145	2385	345	1690	20	290	870	1365	2235
K3	185	2115	785	145	3085	340	1865	40	290	870	1530	2400
K4	185	2150	810	145	3845	325	2020	55	290	870	1695	2565
K5	185	2175	830	145	4580	310	2115	75	290	870	1840	2710
K6	185	2195	845	145	5325	300	2210	85	290	870	1990	2860
K7	185	2210	865	145	5930	285	2280	100	290	870	2080	2950
K8	185	2225	880	145	6535	280	2350	110	290	870	2205	3075

	in									lb		
	V1	V2	V3	H1	H2	H3	H4	Z3	f	G1	G2	G3
K2	7.28	81.69	29.92	5.71	93.90	13.58	66.54	0.79	11.42	1918.02	3009.31	4927.33
K3	7.28	83.27	30.91	5.71	121.46	13.39	73.43	1.57	11.42	1918.02	3373.07	5291.09
K4	7.28	84.65	31.89	5.71	151.38	12.80	79.53	2.17	11.42	1918.02	3736.83	5654.85
K5	7.28	85.63	32.68	5.71	180.31	12.20	83.27	2.95	11.42	1918.02	4056.50	5974.52
K6	7.28	86.42	33.27	5.71	209.65	11.81	87.01	3.35	11.42	1918.02	4387.19	6305.21
K7	7.28	87.01	34.06	5.71	233.46	11.22	89.76	3.94	11.42	1918.02	4585.61	6503.63
K8	7.28	87.60	34.65	5.71	257.28	11.02	92.52	4.33	11.42	1918.02	4861.19	6779.21