



An Oshkosh Corporation company



DOMINATOR[®] II

Mechanics Body

With enhanced strength and stability for higher crane loads, numerous configuration possibilities, and a body rating of 75,000 ft-lb (11.4 tm), the Dominator II mechanics truck offers exceptional performance in virtually any industry. With the Dominator II mechanics truck, you don't have to bring your equipment into the shop for service, because the shop comes to you.

> BASE BODY SPECIFICATIONS

Body Size	11' (3.4 m)	11' (3.4 m)	11' (3.4 m)	11' (3.4 m)	11' (3.4 m)	13' (3.9 m)	14' (4.3 m)	14' (4.3 m)	14' (4.3 m)
Body Configuration¹	LH & RH STD	RF RSD	LF & RF RSD	LF AR, RF RSD	ALL RSD	RF RSD	LF & RF RSD	LH AR, RF RSD	ALL RSD
Body Rating	75,000 ft-lb (11.4 tm)	75,000 ft-lb (11.4 tm)	75,000 ft-lb (11.4 tm)	75,000 ft-lb (11.4 tm)	75,000 ft-lb (11.4 tm)	75,000 ft-lb (11.4 tm)	75,000 ft-lb (11.4 tm)	75,000 ft-lb (11.4 tm)	75,000 ft-lb (11.4 tm)
Body Weight^{2,3}	3722 lb (1688.3 kg)	3789 lb (1718.7 kg)	3845 lb (1744.1 kg)	3883 lb (1761.3 kg)	3897 lb (1767.5 kg)	4205 lb (1907.4 kg)	4439 lb (2013.5 kg)	4502 lb (2042.1 kg)	4553 lb (2065.2 kg)
Body Width	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)
GVWR	19,500-33,000	19,500-33,000	19,500-33,000	26,000-33,000	26,000-33,000	26,000-33,000	26,000-33,000	26,000-33,000	26,000-33,000
Storage Capacity³	141.5 ft ³ (4.0 m ³)	146.6 ft ³ (4.2 m ³)	151.8 ft ³ (4.3 m ³)	159.7 ft ³ (4.5 m ³)	164.9 ft ³ (4.7 m ³)	179.0 ft ³ (5.1 m ³)	197.1 ft ³ (5.6 m ³)	210.7 ft ³ (6.0 m ³)	215.4 ft ³ (6.1 m ³)
Angle of Departure	13°	13°	13°	13°	13°	13°	13°	13°	13°
Chassis CA⁴	84" (2.1 m)	84" (2.1 m)	84" (2.1 m)	84" (2.1 m)	84" (2.1 m)	108" (2.7 m)	120" (3.0 m)	120" (3.0 m)	120" (3.0 m)
Max. IMT Crane Model	1000030'	1000030'	1000030'	1000030'	1000030'	1000030'	1000030'	1000030'	1000030'

¹ Standard (STD) = 52", Raised (RSD) = 60". ² Includes doors, side packs, workbench. ³ Body weight and storage capacity are estimated based on product configuration.

⁴ Does not include welder deck.



> STANDARD FEATURES

- IMT CMD.CTRL™
- IMT Patented Inverted A-Frame Design
- Complete System Integration including Body, Crane, and Compressor
- Three-Point Access Package
- Automotive-style Electrical Harnessing
- IMT Compartment Coating (VOC-compliant polyurethane modified multicolor spray finish)
- Workbench Bumper with Through Compartment



COMPLETE REMOTE CONTROL

Control your chassis, crane functions, service body components and air compressor remotely. IMT CMD.CTRL™ combines strong, reliable hardware with flexible, intuitive software to give operators a productive, user-friendly experience.



HIGH-INTENSITY LED LIGHTING

LED light bars provide superior light penetration for enhanced visibility.

> OPTIONS

- High-Intensity LED Lighting Package
- Axalta Bedliner
- Drawer Sets, Adjustable Shelves
- 3" (7.6 cm) Divided Adjustable Shelves
- Lightweight, Adjustable Bolt Bins
- Rear Stabilizers – Manual or Hydraulic
- Front Stabilizers – Manual
- Workbench Vises and Vise Plates
- Compartment Pressurization System
- Compressed Air and Welding Systems
- Headache Rack
- Telescopic Roof
- Master Lock System


> COMPATIBLE IMT CRANES

ELECTRIC

- 6006i
- 5005i
- 4004i
- 3203i
- 2020E
- 1015E

HYDRAULIC

- 10000
- 8600
- 7500
- 6000
- 2820
- 2020
- 1015

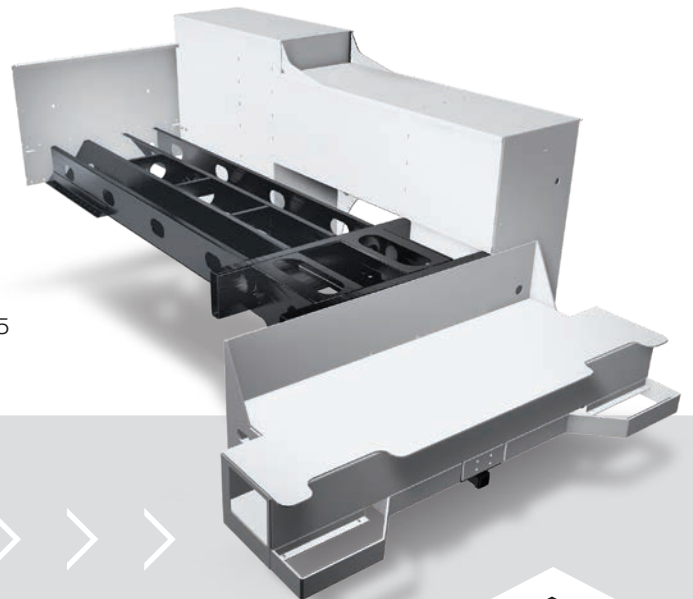

BODY SUBSTRUCTURE

Patented A-Frame design with integrated crane box is engineered for maximum strength and weight reduction.



An Oshkosh Corporation company

NOTHING SAYS COMMITMENT LIKE THE DIAMOND.™

Iowa Mold Tooling Co., Inc. | 500 Highway 18 West | Garner, Iowa 50438 | 800-247-5958 | imt.com

IMT reserves the right to make changes in engineering, design, and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. IMT, the IMT logo, Dominator, NOTHING SAYS COMMITMENT LIKE THE DIAMOND and SiteStar are registered trademarks or trademarks of Iowa Mold Tooling Co., Inc., Garner, IA, USA. © 2022 Iowa Mold Tooling Co., Inc. All Rights Reserved.



REV 6/22